



professional paint systems since 1939

our manifesto

COLOURFUL WELLBEING



Have you ever heard of colourful wellbeing? Probably not. It is our expression. It is our mantra to explain that in Ard Raccanello we do not produce simply colours and paints, but a special wellbeing, colourful.

Because we believe that each colour brings an emotion, a fantasy, a memory that makes everything, and every home, special.

A colourful wellbeing beautiful to see, but above all to live, because colours set in motion the emotional and creative side in each of us.

We have the energy of yellow, the passion of red, the white pages yet to be written, the green to be protected, and all the other colours yet to be mixed, in order to imagine a future and a different, better, colourful wellbeing.

Because living is changing, and there will always be the colour to do it.

our values AN HISTORICAL AND DYNAMIC BRAND

RESPECT, PERSISTENCE, DYNAMISM are the 3 key values around those the whole company politics rounds, thanks to which we were able to show resilience and responsability to partners.

RESPECT

PERSISTENCE

Propose products which can resist to time is the base of our bent blending technological innovation, tradition and quality to face in the best way the challenges which the market, every day, presents us.

DYNAMISM

We are an historical always moving company, that welcomes the innovation adapting to change.

The engine that drives us to grow is our ability to achieve the goals and the determination

to find out innovative and appropriate solutions, always anchored in the fundamental values.

vision

VISION

Spread wellness through color.

MISSION

We feed people wellness giving a shape to color, through products and quality paint systems, sustainable and ideal for every need.

OUR CHALLENGE

Nowadays we live new market opportunities, both national and international, and the possibility to evolve our company towards the values that feature us and on which we want to aim more and more in the future.

We look for the right mix between tradition and innovation. Without tradition there is not identity, but without innovation there is not growth.

Aware of a market more and more changing and about everyday challenges, we do not never forget some main concepts.

WE ARE GREEN

We build a business culture to minimize our impact in the environment, with standards and regulations which involve all the employees.

In our routine, our initiatives are made to promote the energy efficiency, water resource protection, reduction of pollution and a virtuous waste disposal.



ENERGY

100% renewable energy used

-21% reduction of energy used/kg producted

WATER

0,38 l/kg consumption for each kg producted

-6%
reduction of used water
per kg producted



CO₂

CO₂ EMISSIONS

9.424. t/Co₂ emissions of greenhouse gas

-4%
reduction of greenhouse
gas emissions

WASTE

82% packs which come from re-use

+4% increase of waste tons addressed to re-use compared to 2021



We aim to pass the sustainability concept to our products too, from manufacturing to the shelf. The sustainable product proposal is a constant effort to enhance the ecological impact of our range, respecting what we declare on the labels.

A+ CLASS

It identifies a product with a low emission of substances harmful to humans and the environment.



*French Decree n°321/2011 of 03/23/2011 and Arrêté of 04/19/2011



EPD (Environmental Product Declaration)

Measures the environmental impact based on the LCA (Life Cycle Assessment) parameter, so the life performance of the product.

* ISO 14025 and EN 15804

CAM (Minimum Environmental Criteria)

It means guaranteeing a product that also complies with construction interventions in the Public Administration.



* section 2.5.1, section 2.5.13 requirement b), section 3.2.8, according to Ministerial Decree. 23 June 2022 and subsequent GURI publication of 6 August 2022



Silver ion technology

A formulation that allows finishes that resist the proliferation of bacteria, for a healthier and cleaner environment.

Certification ETA

Thermal insulation systems for the energy efficiency of walls, with a view to reducing consumption and lowering environmental impact.





VRG Tecnology (Virtuous Recycled Glass)

Special microspheres in recycled glass, no longer workable, virtuously disposed of in the composition of a building product.

GENERAL ORDER

FAMILIES

1.
Primer for wood and metal

2. Primer for wall

3. Enamels

4. Varnishes for wood

5. Washable

6. Breathable

7. Anti-mould 8. Quartz

9. Thick coatings

10.
Anti carbonation finish

11. Silicate paint 12. Siloxane paint

13. Elastomeric paint 14. Decorative

15. Mortar 16. Colourant

17. Various

QUANTITY PER PALLET

KIND	SIZE	PCS
	15 l	33
	14 l	33
	20 l	22* **
	10 l	33 PLASTIC
METALLICO	10 (44 METAL
METALLIC & PLASTIC CAN	4 l	72 PLASTIC
		80 METAL
	2,5 l	150
	25 kg	33
	24 kg	33
	5 kg	72

KIND	SIZE	PCS
	20 l	32
TANKS	5 l	120
	4 l	120
THINNERS	5 l	135
	1 l	396
SACK	20 kg	42
SAUK	25 kg	40

*22 pcs per ISOLEX

**18 pcs per ARD LASUR & ARD DECOR

Rigeneralegno	12	•
Tema Pittura Opaca	13	•
Ardeolite	14	•
Base	15	•
Primer W	16	•
Over Antiruggine	17	•
Ardinox	18	•
Antiruggine Alchidica	19	•
Primer Universale	20	•
Antiruggine Nitro Grigia	21	•
Ferr-net	22	•
Ardfix	23	•
Isolex	24	•
Isolex W	25	•
Rebuild Fondo L	26	2
Isorest	27	2
Siliard Primer W	28	2
Siliard Primer	29	2
	20	<u> </u>
Biancofix	30	2
Primer Riempitivo Coprente	31	2
Primer Riempitivo Coprente	31	2
Primer Riempitivo Coprente Rasante a Pennello	31	2
Primer Riempitivo Coprente Rasante a Pennello Rasard	31 32 33	2 2 2
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente	31 32 33 34	2223
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill	31 32 33 34 35	②②②②②
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale	31 32 33 34 35 36	②②②②②②
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro	31 32 33 34 35 36 37	00000000
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro Neoard	31 32 33 34 35 36 37 38	0000000000
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro Neoard Ardeol	31 32 33 34 35 36 37 38	00000000
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro Neoard Ardeol Neosilk	31 32 33 34 35 36 37 38 39	 2 3 4 5 6 6 6 6 6 6
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro Neoard Ardeol Neosilk Ardsilk	31 32 33 34 35 36 37 38 39 40	
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro Neoard Ardeol Neosilk Ardsilk Steelguard	31 32 33 34 35 36 37 38 39 40 41 42	
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro Neoard Ardeol Neosilk Ardsilk Steelguard Ardlux	31 32 33 34 35 36 37 38 39 40 41 42 43	
Primer Riempitivo Coprente Rasante a Pennello Rasard PG7 Fondo Coprente PG7 Fill Primer Murale Salvaferro Neoard Ardeol Neosilk Ardsilk Steelguard Ardlux Idrosmalto Lucido	31 32 33 34 35 36 37 38 39 40 41 42 43	

FAMILIES

Over Satinato	48	3
Over Opaco	49	3
Tema Luce	50	3
Tema Seta	51	3
Ard Decor	52	4
Ard Lasur	53	•
Ard Ship	54	•
Tema Impregnante	55	•
Tema Wood Pro	56	•
Tema Finitura Cerata	57	4
Tema Finitura Brillante	58	4
Ardtop	59	•
Idropaint	60	•
Ardsalus Air Refresh	61	•
Maison	62	•
Unique	63	•
Domotica	64	•
Aedilia	65	•
Interior	66	•
Ard Paint	67	6
Traspira	68	6
Bianco Gentile	69	6
Spazio	70	6
Ard Interni	71	6
Bianco Coprente	72	6
Thermoigloo	73	•
A-B Paint Lavabile	74	•
A-B Paint Traspirante	75	•
Clean	76	•
Ardsan Additivo per Interno	77	•
Ardsan Additivo per Esterno	78	•
Spray San	79	•
Ardsan Risanante Murale	80	•
Ard Fill	81	8
Quarz Paint Acrilico	82	8
Quarzo Antico AA	83	8

Quarzo Antico	84	8
Quarzo Moderno	85	8
Quarzo XL	86	8
Rebuild Intonaclima L	87	9
Intonaclima	88	9
Spachtel Rustico	89	9
Litoflex Acrilico	90	9
Beton Decor Coprente	91	1
Beton Decor Elastomerico	92	•
Bio Silrest	93	1
Silrest	94	•
Silrest Fill	95	1
Silrest Intermedio	96	1
Silrest Intonachino	97	•
Siliad Paint	98	•
Siliard Fill	99	•
Siliard Intonachino	100	1
Ardelast Grana Fine	101	(B)
Ardelast Quarzo	102	13
Ardelast Intonachino	103	13
Ardelast Rasante	104	13
Ardelast Stucco	105	1
Creative Fondo	106	•
Ard Lime	107	•
Creative Ard Lime R	108	•
Creative Ard Lime Carrara	109	•
Creative Ard Lime Rasato	110	•
Ard Lime Intonachino	111	•
Creative Setard	112	•
Creative Shiny Design	113	•
Creative Ard Sand	114	Ø
Creative Desert Stone	115	Ø
Creative Morpho	116	Ø
Creative Ardtexture	117	Ø
Creative Ardrust (Base + Creator)	118	•
Creative Ardcopper (Base + Creator)	119	•

Creative Ardcor-ten	120 🏚
Creative Protector	121 🐠
Creative Velature	122 🐠
Creative Archistar	123 🐠
Creative Metal	124 🐠
Ardcoat C8/S8	125 🚯
Ardcoat L10 Glass	126 🚯
Ardcoat L10 EPS	127 🚯
Ardcoat C16	128 🚯
Ardcoat C10	129 🚯
Ardcoat M8	130 🚯
Ardplan AS/BS	131 🚯
Ardmalta	132 🚯
Boiacca Passivante	133 🚯
Silver Stuck	134 🚯
Wizard	135 🐠
Sixteen	136 🐠
Coloratutto	137 🐠
Ard Rep	138 🐠
Ard Rep W	139 🐠
Surface Clear Preserving	140 🐠
No-Smog Plus	141 🐠
Litostucco	142 🐠
Ard Strip	143 🌵
Diluente Sintetico Rapido	144 🐠
Acquaragia Inodore	144 🐠
Diluente Nitro Extra	144 🐠
Sales materials	146
Sales materials	147
Sales materials	148
Sales materials	149

ALPHABETICAL order

A-B Paint Lavabile	74
A-B Paint Traspirante	75
Acquaragia Inodore	144
Aedilia	65
Antiruggine Alchidica	19
Antiruggine Nitro Grigia	21
Ard Decor	52
Ard Fill	81
Ard Interni	71
Ard Lasur	53
Ard Lime	107
Ard Lime Intonachino	111
Ard Paint	67
Ard Rep	138
Ard Rep W	139
Ard Ship	54
Ard Strip	143
Ardcoat C8/S8	125
Ardcoat C10	129
Ardcoat C16	128
Ardcoat M8	130
Ardcoat L10 Glass	126
Ardcoat L10 EPS	127
Ardelast Grana Fine	101
Ardelast Intonachino	103
Ardelast Quarzo	102
Ardelast Rasante	104
Ardelast Stucco	105
Ardeol	39
Ardeolite	14
Ardfix	23
Ardinox	18
Ardlux	43
Ardmalta	132
Ardplan AS/BS	131
Ardsalus Air Refresh	61
Ardsan Additivo per Esterno	78
Ardsan Additivo per Interno	77
Ardsan Risanante Murale	80
Ardsilk	41
Ardtop	59
Base	15
Beton Decor Coprente	91
Beton Decor Elastomerico	92
Bianco Coprente	72
Bianco Gentile	69

5. "	
Biancofix	30
Bio Silrest	93
Boiacca Passivante	133
Clean	76
Coloratutto	137
Creative Archistar	123
Creative Ard Lime Carrara	109
Creative Ard Lime R	108
Creative Ard Lime Rasato	110
Creative Ardtexture	117
Creative Ard Sand	114
Creative Ardcopper (Base + Creator)	119
Creative Ardcor-ten	120
Creative Ardrust (Base + Creator)	118
Creative Desert Stone	115
Creative Fondo	106
Creative Metal	124
Creative Morpho	116
Creative Protector	121
Creative Setard	112
Creative Shiny Design	113
Creative Velature	122
Diluente Nitro Extra	144
Diluente Sintetico Rapido	144
Domotica	64
Ferr-net	22
Idropaint	60
Idrosmalto Lucido	44
Idrosmalto Opaco	46
Idrosmalto Satinato	45
Interior	66
Intonaclima	88
Isolex	24
Isolex W	25
Isorest	27
Litoflex Acrilico	90
Litostucco	142
Maison	62
Neoard	38
Neosilk	40
No-Smog Plus	141
Over Antiruggine	17
Over Opaco	49
Over Satinato	48
Overground	47
PG7 Fondo Coprente	34

PG7 Fill	35
Primer Murale	36
Primer Riempitivo Coprente	31
Primer Universale	20
Primer W	16
Quarz Paint Acrilico	82
Quarzo Antico	84
Quarzo Antico AA	83
Quarzo Moderno	85
Quarzo XL	86
Rasante a Pennello	32
Rasard	33
Rebuild Fondo L	26
Rebuild Intonaclima L	87
Rigeneralegno	12
Salvaferro	37
Siliard Fill	99
Siliard Intonachino	100
Siliard Paint	98
Siliard Primer W	28
Siliard Primer	29
Silrest	94
Silrest Fill	95
Silrest Intermedio	96
Silrest Intonachino	97
Silver Stuck	134
Sixteen	136
Spachtel Rustico	89
Spazio	70
Spray San	79
Steelguard	42
Surface Clear Preserving	140
Tema Finitura Brillante	58
Tema Finitura Cerata	57
Tema Impregnante	55
Tema Luce	50
Tema Pittura Opaca	13
Tema Seta	51
Tema Wood Pro	56
Thermoigloo	73
Traspira	68
Unique	63
Wizard	135

NUMERICAL Index

SERIES	PRODUCT	PAGE	SERIES	PRODUCT	PAGE	SERIES	PRODUCT	PAGE
006	Primer Universale	20	504	Domotica	64	631	Litoflex Acrilico 1,8 mm	90
008	Primer W	16	506	Maison	62	632	Spachtel Rustico 1 mm	89
022	Ardeolite	14	508	A-B Paint Lavabile	74	635	Intonaclima 1,2 mm	88
025	Base	15	509	Thermoigloo	73	637	Spachtel Rustico 1,2 mm	89
028	Tema Pittura Opaca	13	510	Ardtop	59	638	Intonaclima 1 mm	88
032	Ardinox	18	516	Siliard Paint	98	639	Spachtel Rustico 1,5 mm	89
035	Antiruggine Alchidica	19	520	Ard Paint	67	641	Siliard Intonachino 1 mm	100
039	Over Antiruggine	17	521	Bianco Gentile	69	645	Ardelast Intonachino 1,2 mm	103
040	Antiruggine Nitro Grigia	21	522	Clean	76	709	Creative Ardtexture	117
050	Litostucco	142	524	Unique	63	710	Creative Ard Sand	114
056	Ardelast Stucco	105	525	Interior	66	715	Creative Shiny Design	113
070	Ardfix	23	526	A-B Paint Traspirante	75	719	Creative Morpho	116
073	Creative Fondo	106	527	Traspira	68	720	Creative Desert Stone	115
074	Primer Murale	36	537	Ardsalus Air Refresh	61	722	Creative Archistar	123
075	Primer Riempitivo Coprente	31	538	Bio Silrest	93	725	Creative Setard	112
076	Isorest	27	541	Spazio	70	740	Creative Ardcor-ten	120
077	Siliard Primer W	28	544	Ard Interni	71	741	Creative Ardrust Base	118
079	Biancofix	30	548	Bianco Coprente	72	742	Creative Ardcopper Base	119
081	Isolex	24	550	Quarz Paint Acrilico	82	743	Creative Ardrust Creator	118
082	Siliard Primer	29	551	Quarzo Moderno	85	744	Creative Ardcopper Creator	119
083	Rasard	33	552	Siliard Fill	99	749	Creative Metal	124
084	Rasante a Pennello	32	553	Ard Fill	81	910	Ard Rep	138
085	Isolex W	25	554	Beton Decor Coprente	91	911	Spray San	79
095	Silrest Intermedio	96	555	Creative Velature	122	914	Ardsan Additivo per Interno	77
135	Tema Luce	50	556	Ardelast Intonachino 1 mm	103	915	Ardsan Additivo per Esterno	78
137	Idrosmalto Lucido	44	557	Creative Ard Lime R	108	916	Ardsan Risanante Murale	80
141	Ardlux	43	558	Ard Lime	107	919	Ard Rep W	139
151	Ardeol	39	559	Silrest	94	921	Ard Strip	143
154	Neoard	38	561	Ardelast Rasante	104	922	Ferr-net	22
232	Over Satinato	48	563	Ardelast Quarzo	102	930	Overground Adhesion Promoter	47
234	Over Opaco	49	564	Creative Ard Lime Carrara	109	933	Overground Grip	47
235	Tema Seta	51	565	Creative Ard Lime Rasato	110	939	Overground	47
237	Idrosmalto Satinato	45	566	Ard Lime Intonachino 1 mm	111	951	Coloratutto	137
238	Idrosmalto Opaco	46	567	Ard Lime Intonachino 0,5 mm	111	953	Wizard	135
250	Ardsilk	41	568	Ardelast Grana Fine	101	957	Sixteen	136
252	Neosilk	40	569	Silrest Fill	95	960	Boiacca Passivante	133
290	Steelguard	42	579	Beton Decor Elastomerico	92	962	Ardplan AS/BS	131
293	Salvaferro	37	583	No-Smog Plus	141	963	Silver Struck	134
296	Salvaferro Grana Grossa	37	584	PG7 Fondo Coprente	34	966	Ardmalta	132
430	Surface Clear Preserving	140	585	PG7 Fill	35	967	Ardcoat C8/S8	125
440	Tema Finitura Brillante	58	604	Quarzo XL	86	967	Ardcoat C10	129
441	Tema Impregnante	55	607	Quarzo Antico AA	83	967	Ardcoat C16	128
442	Tema Finitura Cerata	57	608	Quarzo Antico	84	967	Ardcoat M8	130
443	Tema Wood Pro	56	614	Rebuild Fondo L	26	967	Ardcoat L10 Glass	126
448	Creative Protector	121	622	Silrest Intonachino 0,5 mm	97	967	Ardcoat L10 EPS	127
449	Rigeneralegno	12	623	Intonaclima 0,5 mm	88	970	Acquaragia Inodore	144
451	Ard Ship	54	624	Rebuild Intonaclima L	87	972	Diluente Nitro Extra	144
453	Ard Lasur	53	625	Siliard Intonachino 1,2 mm	100	976	Diluente Sintetico Rapido	144
461	Ard Decor	52	627	Silrest Intonachino 1 mm	97	,,,	zoz otetico napido	1-7-7
502	Idropaint	60	629	Silrest Intonachino 1,2 mm	97			
503	Aedilia	65	630	Intonaclima 1,5 mm	88			
503	Acuitia	0.0	030	monacuma 1,0 mm	00			

RIGENERALEGNO

s. 0.449

pigmented primer for reviving wood


It is a water based primer for exteriors, coloured pigmented similar to "pine wood". It lightens & uniforms old dark/ silvery wood, varnishes & synthetic enamels. It offers a low filling power which enhances the natural beauty of the veins in aged wood.


Two finishes are possible: a transparent coloured finish (which preserves the wood's natural colour) or a different shade as desired.

It inhibits the damage caused by UV rays on "lignin" as well as mould and fungi growth resulting in an extended service-life. It is flameproof, odourless & not hazardous to health, therefore it is particulary suitable for interiors and poorly aired premises.

TECHNICAL DATA SHEET n°30







READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
0.449	2152	2,5	2 pcs	26,57	66,43	4,43
U.447	2132	0,750	6 pcs	27,32	20,49	4,55

COLOR RANGE

	2152
	2102

APPLICATION METHOD & SURFACE PREPARATION				
Bare wooden surfaces	Wooden surfaces treated with enamels or unsound paintwork			
Sand thoroughly following the vein & apply RIGENERALEGNO s. 0.449	Sand any old layers of varnish thoroughly. The revival of grained wood is possible only if the natural veins are visible			
	Use LITOSTUCCO s. 1.050 for interior stuccoing & a synthetic stucco for exteriors.			
ARD LASUR s. 0.453 (exterior finish)	Apply RIGENERALEGNO s. 0.449			
TEMA FINITURA CERATA s. 0.442 (interior finish)	ARD LASUR s. 0.453 (exterior finish) or TEMA FINITURA CERATA s. 0.442 (interior finish)			

TEMA PITTURA OPACA Riempitiva di Fondo s. 0.028

universal water based primer

It is a water based primer for exteriors, coloured pigmented similar to "pine wood". It lightens &uniforms old dark/silvery wood, varnishes & synthetic enamels. It offers a low filling power which enhances the natural beauty of the veins in aged wood.

Two finishes are possible: a transparent coloured finish (which preserves the wood's natural colour) or a different shade as desired.

It inhibits the damage caused by UV rays on "lignin" as well as mould and fungi growth resulting in an extended service-life. It is flameproof, odourless & not hazardous to health, therefore it is particulary suitable for interiors and poorly aired premises.

TECHNICAL DATA SHEET n°36



5-8% in water volume



5-8% in water volume



10-15% in water volume (air spray gun)



4-5 m²/l with 2 layers



READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² 2,5 24,44 61,10 2,72 2 pcs 0.028 **1010** white 0,750 6 pcs 25,19 18,89 2,80

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
0.028	1010 white	2,5	2 pcs	24,44	61,10	2,72
0.026	1010 Willie	0,750	6 pcs	25,19	18,89	2,80

729	8	4218	4225	4229	8272
526	57	5271			

APPLICATION METHOD & SURFACE PREPARATION					
Bare wooden surfaces	Wooden surfaces treated with enamels or unsound paintwork	Superfici murali	Superfici murali molto sfarinanti	Superfici interne in legno e muro	
DILUENTE NITRO (or degrease resinous		ARDFIX s. 0.070 or ISOLEX W s. 0.085	ISOLEX s. 0.081 or ISOLEX W s. 0.085	LITOSTUCCO s. 1.050 (for imperfections)	

ARDEOLITE s. 0.022

matt filler coat

Filler coat based on synthetic resins. It dries rapidly, spreads well & sanding is excellent. It's a perfect dressing primer for wooden surfaces. It can also be used as a filler coat for interior and items in cast iron (radiators) treated with rust inhibitors.


TECHNICAL DATA SHEET n°35





7-8% in volume of ACQUARAGIA INODORE s. 0.970







READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
0.022 1010 white	2,5	2 pcs	20,73	51,83	1,88	
	0,500	6 pcs	21,48	10,74	1,95	

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [WIZARD]						
SERIES	COLOR	PACKAG	GING [l]	€/l	€/PACKAGING	€/m²
0.022	1010 white	2,5	2 pcs	20,73	51,83	1,88
0.022	TO TO WITH	0,500	6 pcs	21,48	10,74	1,95

7298	4218	4225	4229	8272
5267	5271			

APPLICATION METHOD & SURFACE PREPARATION				
New wooden surfaces	Iron or cast iron surfaces			
Use LITOSTUCCO s. 1.050 for interior st	Use LITOSTUCCO s. 1.050 for interior stuccoing & synthetic stucco for exteriors			
Thoroughly san	ARDINOX s. 0.032			

BASE s. 0.025

undercoat for wood and iron

It is an anticorrosive filler paint for interior/exterior iron & wooden surfaces. It features excellent filling & spreading power, good adherence, sanding & surface/ through drying. Its anti corrosion and filler properties make it the ideal product for application on iron/cast iron (e.g., radiators).


TECHNICAL DATA SHEET n°36






6-8% in volume of ACQUARAGIA INODORE s. 0.970







READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
0.025	25 1010 white	2,5	2 pcs	24,64	61,60	2,24
0.025		0,750	6 pcs	25,39	19,04	2,31

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
	1010 white	2,5	2 pcs	24,64	61,60	2,24
0.025	1010 Write	0,750	6 pcs	25,39	19,04	2,31
0.025	1033 neutral white	2,3	2 pcs	20,06	46,14	1,82
	1033 Heutrat White	0,690	6 pcs	20,29	14,00	1,84

r occarvato	NCS 2050	Fan-deck NCS 2050
RAL K7 💠	Fan-deck RAL K7	

APPLICATION METHOD & SURFACE PREPARATION				
New wooden surfaces	Superfici in ferro o ghisa			
Use LITOSTUCCO s. 1.050 for interior stuccoing & a synthetic stucco for exteriors	Remove any rust and/or flaking metal using a metal brush. Degrease and sand throughly			
Thoroughly sand the substrate	Degrease and sand throughly			

PRIMER W

s. 0.008

water based primer for difficult surfaces


It is an acrylic binders based adhesion primer, ideal for difficult surfaces such as galvanized sheets and non-ferrous metals (copper, brass, aluminium). Adhesion is generally also optimum on hard plastic, but considering the many types of plastic available, a test is recommend. It is a low odour product, easy to apply and with a rapid drying. Suitable both for interiors and exteriors, it is the ideal primer for non-ferrous metal supports to treat with state-of-the- art water-dilutable enamels of the **Over line** and of the traditional **Tema line**.

TECHNICAL DATA SHEET n°34





ready to use





dilute max. 5% in water volume



10-15% in water volume



sandable and recoatable after 6 hrs

READY HUES							
SERIES	COLORE	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
0.000	1010 white	2,5	2 pcs	33,97	84,93	4,25	
0.008	1010 white	0,750	6 pcs	34,72	26,04	4,34	

COLOR RANGE

TINTING SYSTEMS [16 COLOURS]							
SERIES	COLORE	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
	1010 white 0.008 1023 neutral white	2,5	2 pcs	33,97	84,93	4,25	
0 000		0,750	6 pcs	34,72	26,04	4,34	
0.006		2,3	2 pcs	30,12	69,28	3,76	
	1023 Heutrat White	0,690	6 pcs	31,99	22,07	4,00	

con recursed to the control of the c	NCS 2050	Fan-deck NCS 2050
RAL K7 💠	Fan-deck RAL K7	

APPLICATION METHOD & SURFACE PREPARATION					
Surfaces in galvanized sheet and non-ferrous metals	Rusted surfaces	Plastic surfaces			
Degrease with DILUENTE NITRO EXTRA s. 0.972	Accurately clean up and treat the rusted areas with OVER ANTIRUGGINE s. 0.039	Clean, degrease and possibly sand			
Remove any unsound parts through a soft sanding with emery cloth	When drying is complete, accurately clean up, degrease galvanized parts and apply a layer of PRIMER W s. 0.008	the support			

OVER ANTIRUGGINE s. 0.039

anti-corrosive water dilutable primer

it is a water based product formulated with high levels of anti-corrosive pigments. It does not contain substances hazardous to health or unpleasant odours.

It is particularly suitable for interiors or poorly aired premises. The binder employed offers a remarkable substrate wettability and low water permeability resulting in a water penetration resistance & corrosion similar to the traditional solvent based rustproof products.

It is ideal for items in iron (interiors & exteriors); it is the perfect primer for the latest generation of water-dilutable enamels "Over" & the traditional Tema line.

TECHNICAL DATA SHEET n°29

7,5 m²/l with 2 layer



5% in water volume







READY HUES							
SERIES	COLORE	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
U U30	1010 white	2,5	2 pcs	30,39	75,98	4,05	
0.039	1010 Willie	0,750	6 pcs	31,14	23,36	4,15	

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

€/m²
4,05 4,15

7298	4218	4225	4229	8272
5267	5271			

APPLICATION METHOD & SURFACE PREPARATION

Remove any rust and/or flaking metal using a metal brush

Degrease and remove any unsound parts

ARDINOX s. 0.032

synthetic rust-inhibitor with zinc phosphate

Rust inhibitor based on alkyd resins. It features remarkable hiding power, outstanding flow and ease of application. Its ideal for corrosion protection on any kind of ironwork, especially when brush application is required (gates, railings, radiators etc.).


TECHNICAL DATA SHEET n°27





9-10% in volume of ACQUARAGIA INODORE s. 0.970







READY HUES							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
5413 red	2,5	2 pcs	20,50	51,25	2,41		
0.032	9422 grey	0,500	6 pcs	22,10	11,05	2,60	
0.032		2,5	2 pcs	22,28	55,70	2,61	
	4445 orange	0,500	6 pcs	23,88	11,94	2,81	

COLOR RANGE

5413	9422	4445

APPLICATION METHOD & SURFACE PREPARATION

Bare surfaces

Already painted surfaces and unsound paintwork

Remove any rust and/or flaking metal using a metal brush.

Degrease and sand thoroughly

Remove rust and unsound paintwork

ANTIRUGGINE ALCHIDICA s. 0.035

zinc-phosphate rust inhibitor

It is an anti-corrosive synthetic oil primer. The remarkable dry residue, together with good wettability, adhesion and elasticity offer good results & adequate protection. Its ideal for protecting any kind of ironwork, especially when brush application is required (gates, rails, radiators etc.).


TECHNICAL DATA SHEET n°33





9-10% in volume of ACQUARAGIA INODORE s. 0.970







READY HUES							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
0.035 5414 oxyd re 9429 grey	5414 oxyd red	2,5	2 pcs	14,96	37,40	1,99	
	9429 grey	0,500	6 pcs	16,56	8,28	2,21	
	//22	2,5	2 pcs	15,40	38,50	2,05	
	4422 orange	0,500	6 pcs	17,00	8,50	2,27	

COLOR RANGE

5413	9422	4445

APPLICATION METHOD & SURFACE PREPARATION

PRIMER UNIVERSALE

s. 0.006

monocomponent anticorrosive clinging primer

It resolves the problem of adhesion on difficult surfaces such as zincked iron, copper, brass, aluminium, cast iron and metal surfaces in general. Adhesion on PVC plastics (prior testing) is also optimum. The anticorrosive properties are guaranteed by the remarkable amount of active pigments. The particular blend of resins make the product highly recoatable with a wide range of enamels

The particular blend of resins make the product highly recoatable with a wide range of enamels (nitrocellulose, brush synthetics, water based enamels, bi-component polyurethane). It is a universal filler coat which offers a remarkable adhesion, rapid drying, good covering power and versatile application.


PRIMER UNIVERSALE


TECHNICAL DATA SHEET n°44



ready to use







READY HUES							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
0.004	1010 white	2,5	2 pcs	30,89	77,23	3,86	
0.006	1010 white	0,500	6 pcs	32,49	16,25	4,06	

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [WIZARD]								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
0.006 1010 white	1010 white	2,5	2 pcs	30,89	77,23	3,86		
	1010 Willie	0,500	6 pcs	32,49	16,25	4,06		

7298	4218	4225	4229	8272
5267	5271			

APPLICATION METHOD & SURFACE PREPARATION							
Bare iron or cast iron surfaces	Other metal surfaces	Plastic surfaces	Painted surfaces				
Remove any rust and/or flaking metal using a metal brush. Degrease and sand thoroughly	Degrease with DILUENTE NITRO EXTRA s. 0.972	DILUENTE NITRO EXTRA 0.972 Degrease and sand	Degrease and remove any unsound parts				


ANTIRUGGINE NITRO GRIGIA s. 0.040

A rust inhibiting primer based on nitrocellulose & synthetic resins featuring fast drying & covering power. Its ideal for varnishing cycles when employng **Ardlux** for interior iron end items such as, machine tools, shelving, metal furniture etc.

TECHNICAL DATA SHEET n°37









READY HUES							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
0.040	9424 grey	2,5	2 pcs	23,14	57,85	2,43	
0.040	7424 grey	0,750	6 pcs	23,89	17,92	2,51	

COLOR RANGE



APPLICATION METHOD & SURFACE PREPARATION

Bare iron or iron cast surfaces

Remove any rust and/or flaking metal using a metal brush. Degrease and sand thoroughly

FERR-NET s. 0.922

rust converter

It is a product in emulsion which reacts with rust forming an anchored inert metal organic compound filler ideal as a substrate for painting. It can also be applied to rust free iron surfaces in order to impede formation of the same. It's the perfect product for gates, gutters, radiators, car bodies, metal furniture, household appliances etc. Once applied it resists against oil, petrol and thermal excursions.

FERR-NET

TECHNICAL DATA SHEET n°182



ready to use





allow 2 hrs between layers,
recoatable after 24-48 hrs

READY HUES							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
0.922	0000 colourless	0,750	12 pcs	40,36	30,27	3,36	
0.722	ooo colour less	0,250	20 pcs	65,10	16,28	5,42	

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Rusty surfaces

Remove any rust and/or flaking metal using a metal brush. Degrease and sand thoroughly

ARDFIX s. 0.070


acrylic insulating impregnating agent

Impregnating primer for interior/ exterior walls featuring an optimum binding power, alkali & water resistance.

The minimum dimension of the particles in emulsion facilitates the penetration into the superficial pores. Following evaporation, a resistant film is created which impedes the chalking & decay of unsound plaster favouring the adherence of the finishing products on the consolidated substrate. It also blocks the alkalinity on new cement concrete, reduces & uniforms the absorption of the mural surface resulting in improved aesthetics.

These remarkable properties make it an excellent primer for emulsion paint & hydro-plastic finishes.

TECHNICAL DATA SHEET n°94







recoatable after 4 hr

READY HUES								
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²		
		20		11,46	229,20	0,27		
0.070	0000 trasparent	5		12,50	62,50	0,29		
		1	6 pcs	13,25	13,25	0,31		

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)

Exterior mural surfaces

Interior mural surfaces
LITOSTUCCO s. 1.050
(for imperfections)

ISOLEX s. 0.081

consolidating solvent based impregnating sealer

Impregnating primer for interior/exterior walls which, thanks to an attentive choice of solvents, offers a deep penetration through the superficial pores. As the solvents evaporate a strong & lasting film is formed.

This film inhibits chalking and the decaying process of unsound plaster favouring the adherence of the finishing products on the consolidated surfaces. It reduces & uniforms surface absorption resulting in an aesthetically pleasing finish. Free of water, it can be applied even at an ambient temperature of below 0°C & stored without particular precautions. It is the perfect primer for finishes with emulsion paints or hydro plastic coatings & can be applied on all sorts of surfaces.



TECHNICAL DATA SHEET n°112







READY HUES									
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²			
		20		13,47	269,40	2,69			
0.081	0000 trasparent	5		14,51	72,55	2,90			
		1	6 pcs	15,26	15,26	3,05			

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Treat moulds with ARDSAN RISANANTE MURALE s. 0.916

Exterior mural surfaces

Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)

ISOLEX W s. 0.085


nanotechnological solvent free acrylic consolidating insulator

Impregnating primer for interior/exterior surfaces which, thanks to the nanometric dimensions of its particles, facilitates deeper penetration in walls. This outstanding process inhibits the chalking & decay of unsound plasters favouring the adherence of the finishing products on the consolidated substrate.

It reduces & uniforms the absorption of the mural surface resulting in improved aesthetics. These remarkable properties make it an excellent alternative to the best solvent based in sulators: it is therefore an excellent primer when finishing with latex paints or thick coatings.

TECHNICAL DATA SHEET n°96









READY HUES								
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²		
0.085	0000 trasparent	20		12,52	250,40	0,76		
		5		13,56	67,80	0,82		
		1	6 pcs	14,31	14,31	0,87		

COLOR RANGE



Showcard CREATIVE OXYDATE

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Exterior mural surfaces	Sound interior surfaces painted with washable emulsion paints or distemper	Unsound or chalky interior surfaces painted with distemper	
Mortar ARDPLAN AS/BS s. 1.962	Scrape to remove any unsound paintwork		
Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)			

REBUILD FONDO L s. 1.614

elastomeric lightweight algae resistant smoothing primer made of paste Cutting-edge lightweight primer made of paste for external walls.

It contains special microspheres in total recycled glass, created from selected pieces of glass no usable anymore to manufacture new bottles and glasses. Reduced weight up to 25% on the wall compared to a normal primer of same granulometry, with great elastomeric features (A4 class for UNI 1062-7), resistant to molds and algae according to UNI EN 15457 and UNI EN 15458, Rebuild Fondo L s. 1.614 results ideal for restoration works on old ETICS coats.

Compared to traditional cement primers, its acryl-siloxane nature let really reduce the work timing, because it does not need seasoning.

It let get reinforced screeds through embedding Ardcoat fiberglass mesh. Rebuild Fondo L s. 1.614 + Rebuild Intonaclima L s. 1.624 system represents a cutting edge and sustainable repair cycle on old damaged ETICS systems.

TECHNICAL DATA SHEET n°221







READY HUES						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/CONFEZIONE	€/m²	
1.614	1010 white	20	6,72	134,40	13,44	

COLOR RANGE





Manual ARDCOAT SYSTEM SOLUTION

Flyer SISTEMI ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS]					
SERIES	ERIES COLOR PACKAGING [kg] €/kg €/CONFEZIONE €/m ²				
1.614	1010 white	20	6,72	134,40	13,44



APPLICATION METHOD & SURFACE PREPARATION					
Surfaces with damaged ETICS system	Wall surfaces already painted and partially degraded	Wall surfaces covered with continuous plastic coatings or relief plasters			
Check that the old ETICS system adheres perfectly to the support	Remove any parts that are not perfectly adherent to the wall and any efflorescence				
ISOLEX W s. 0.085 (in case of powdery surfaces)	Treat moulds with ARDSAN RISANANTE MURALE s. 0.916				
REBUILD FONDO s. 1.614	ISOLEX s. 0.081 or ISOLEX W s. 0.085	ICOLEY - 0.001			
(two layers, placing the 150 g/m³ Ardcoat fibreglass mesh inside the first layer)	Mortar ARDPLAN AS/BS s. 1.962 (to plaster any imperfections)	ISOLEX s. 0.081 or ISOLEX W s. 0.085			


ISOREST s. 0.076


silicate-based impregnating sealer


This product's fixative, consolidating & sealing properties guarantee an optimum preparation of both old & new plaster for treatment (without altering the mineral characteristics) with the **Silrest line** of products. **Isorest** is also used as a thinner with the **Silrest series**.

TECHNICAL DATA SHEET n°270









		READY HU	IES		
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.076	0000 trasparent	20	12,61	252,20	0,72
0.076	0000 trasparent	5	13,65	68,25	0,78

COLOR RANGE



Flyer LINEA SILREST

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Chalky surfaces

Surfaces painted with old lime paints

Apply a layer of ISOREST s. 0.076 diluted from 100% to 200% in water volume

Remove any unsound paintwork and apply a layer of ISOREST s. 0.076

SILIARD PRIMER W s. 0.077

siloxanic water-repellent impregnating agent

 $Impregnating \ primer \ for \ exterior \ walls \ based \ on \ special \ acrylic \ resins \ \& \ polysiloxanics \ in \ emulsion.$ It reduces the absorption of the substrate, and evens the surface thus improving the final aesthetics. It is the perfect primer for chalk free walls when finishing with the Siliard line (protection & decoration of listed facades) featuring low water vapour diffusion resistance. It is also suitable when a reduced water absorption of the substrate is required, as is the case of silicate paints & plastic coatings.

TECHNICAL DATA SHEET n°210





50-100% in water volume





READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.077	0100 trasparent	20	14,95	299,00	2,99
0.077	0100 trasparent	5	15,99	79,95	3,20

COLOR RANGE



Flyer LINEA SILIARD

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. U.916					
Bare exterior mural surfaces	Surfaces painted with synthetic or mineral paints				
Remove any filth & unsound parts	SILIARD PRIMER s. 0.082				
Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)	SILIAND FRIMER S. 0.002				

SILIARD PRIMER

s. 0.082

impregnating & consolidating siloxanic

water-repellent primer
Impregnating primer for exterior walls based on special acrylic resins & polysiloxanics in solution.
It lends an optimum consolidating effect, reduces substrate absorption and evens the surface thus improving the final aesthetics. It is ideal as a primer when using emulsion paints, plastic coatings, hydrophobic painting cycles (Siliard line) & when a reduction in substrate water absorption is required, as is the case of silicate paints & plastic coatings.

TECHNICAL DATA SHEET n°110











READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.082	0000 trasparent	20	17,72	354,40	3,94

COLOR RANGE



Flyer LINEA SILIARD

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Bare exterior mural surfaces Surfaces painted with synthetic or mineral paints Remove any filth & unsound parts Remove any traces of paint that are not perfectly adherent and any efflorescence Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)

NOTE: The presence of saline efflorescence on the surfaces or those subject to rising humidity does not guarantee the adhesion of the product to the support, therefore preventive intervention to restore the masonry is necessary

BIANCOFIX s. 0.079


fixative hiding sealer

Impregnating pigmented primer suitable as an undercoat, for emulsion paints and plastic coatings. Apart from the normal properties found in impregnating agents (substrate penetration, sealing effect, alkalinity barrier on concrete) the hiding power of this product is such that one of the finishing coats can be saved.

It can be applied on any mineral support. Its use is particularly advantageous on smooth & compact surfaces (such as plaster & plasterboard); on walls with traces of puttying & patching, on surfaces with radiator smudges or which have been painted with dark colours.

TECHNICAL DATA SHEET n°95









	READY HUES					
SERIES	COLOR	PACKAGI	NG [l]	€/l	€/PACKAGING	€/m²
		16		12,32	197,12	1,45
0.079	1010 white	4		13,36	53,44	1,57
		1	6 pcs	14,11	14,11	1,66

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

	TINTING	SYSTEMS [1	6 COLOURS 8	& WIZARD]	
SERIES	COLOR	PACKAGIN	G [l] €/l	€/PACKAGING	€/m²
		16	12,32	197,12	1,45
0.079	1010 white	4	13,36	53,44	1,57
		1 6	pcs 14,11	14,11	1,66

7298	4218	4225	4229	8272			
5267	5271	Hues realizable for INTERIOR					
4202	4208	3303	5223	8287			
Hues rea	lizable for	EXTERIOR	?				

APPLICATION METHOD & SURFACE PREPARATION

Treat moulds, moss & bacterial infestation with SPRAY SAN s. 0.911 or ARDSAN RISANANTE MURALE s. 0.916

Exterior mural surfaces Interior surfaces

Remove any filth and unsound parts

Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)

LITOSTUCCO s. 1.050 (for imperfections)

Treat distemper paintwork, unsound & chalky surfaces with ARDFIX s. 0.070 or ISOLEX W s. 0.085

PRIMER RIEMPITIVO COPRENTE s. 0.075

pigmented sealer with optimum hiding power

It is a pigmented sealer suitable for the preparation of interior/exterior mural surfaces to be finished with traditional emulsion or textured paints.

It offers a remarkable filling power, optimum hiding power & anchorage. In fact, its fixative and hiding power is often such that one of the finishing coats can be saved.

It is ideal for application on lime cement mortar plaster, chalky primers and plasterboard panels. The application on plasterboard is particularly effective as it produces a rough surface favouring the adhesion of the subsequent layers. **Primer Riempitivo Coprente** is also suitable for smooting stucco work & the recoating of surfaces painted with strong colours.

EXANTI E FISSATIVI PIGMENTATI

TECHNICAL DATA SHEET n°260



15-20% in water volume





reco	atable after 4 hrs
------	--------------------

	READY HUES				
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0 075 1010 white	14	7,72	108,08	1,29	
0.075	io io winte	4	8.76	35.04	1.46

TINTING SYSTEMS [16 COLOURS & WIZARD] SERIES €/l **€/PACKAGING COLOR** PACKAGING [1] €/m² 14 7,72 108,08 1,29 0.075 **1010** white 4 8,76 35,04 1,46

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

7298	4218	4225	4229	8272	5267	5271
Hues r	ealizab	le for II	NTERIC	R		
4202	4208	3303	5223	8287		
Hues realizable for EXTERIOR						
Only with 16 Colours						

NTE D'ITALIA 💠	Fan-deck
	TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION			
Treat mould with ARDSAN RISANANTE MURALE s. 0.916			
Exterior mural surfaces	Interior mural surfaces		
Remove any filth and unsound parts			
Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)	LITOSTUCCO s. 1.050 (for imperfections)		
ISOLEX s. 0.081 or ISOLEX W s. 0.085 (on chalk surfaces)	Treat distemper paintwork, unsound & chalky surfaces with ARDFIX s. 0.070 or ISOLEX W s. 0.085		
The hues indicated in the colour range have been devised to ontimi	ze coverage when finishing with difficult hues (refer to the formulary)		

RASANTE A PENNELLO s. 0.084

rough acryl-siloxanic pigmented primer

Rough pigmented primer suitable for smoothing interior & exterior surfaces to be finished with traditional emulsion paints, decorative effects & thick coatings. It offers a remarkable filling/hiding power, alkali inertia, anchorage & adhesion on any clean/dry mural surface. It is ideal for interior application on plasterboard & smooth chalky/lime surfaces. It also improves the final aesthetics of surfaces with repair areas & imperfections. At the same time, it can also be applied externally to roughen smooth surfaces such as cement slabs & concrete parts.

It is ideal for smoothing & filling substrates characterized by static micro-cracks & as a primer to reproduce antique like hazes.

TECHNICAL DATA SHEET n°263





12-15% in water volume







READY HUES						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.084 1010 white	1010 white	14	9,35	130,90	2,67	
	1010 white	4	10,39	41,56	2,97	

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

	TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR PACKAGING [l] €/l €/PACKAGING €/m²				€/m²	
	1010 white	14	9,35	130,90	2,67	
0.084		4	10,39	41,56	2,97	
0.004		13,16	6,86	90,28	1,96	
	1023 Heatrat Willte	3,76	7,97	29,97	2,28	

With	With 16 Colours & Wizard						
729	8	4218	4225	4229	8272	5267	5271
		canzas		NTERIC			
420	12	4208	3303	5223	8287		
Hues	s r	ealizab	le for E	XTERIO	OR		
Only	Only with 16 Colours						
	TI <u>NTE D'ITALIA</u> ❖ Fan-deck TINTE D'ITALIA						

APPLICATION METHOD & SURFACE PREPARATION Treat mould with ARDSAN RISANANTE MURALE s. 0.916 Exterior mural surfaces Remove any filth and unsound parts Mortar ARDPLAN AS/BS s. 1.962 [for imperfections] LITOSTUCCO s. 1.050 (for imperfections) ISOLEX s. 0.081 or ISOLEX W s. 0.085 (on chalky surfaces) Treat distemper paintwork, unsound & chalky surfaces ARDFIX s. 0.070 or ISOLEX W s. 0.085

RASARD s. 0.083

uniforming smoother

Rough pigmented primer suitable for smoothing exterior walls to be finished with traditional emulsion paints or thick coatings. It features an excellent filling power which uniforms irregular surfaces such as those found during restoration work. It also offers an optimum hiding power, resistance to alkali, adhesion & anchorage which lends a rough aspect similar to two coat plaster work.

Thanks to these features it can be used to roughen smooth surfaces such as cement slabs & concrete parts. It is ideal for filling substrates with static micro-cracks & as a primer to reproduce antique-effect rustic hazes.


TECHNICAL DATA SHEET n°261





5-10% in water volume







allow 12 hrs between layers, recoatable after 4 hrs

READY HUES					
SERIES	ES COLOR PACKAGING [1]		€/l	€/PACKAGING	€/m²
0.083 1010 white	14	8,53	119,42	4,26	
	1010 Write	4	9,57	38,28	4,78

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

	TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	SERIES COLOR PACKAGING [t] €/L €/PACKAGING €/m ²				€/m²	
0.083 1010 white	14	8,53	119,42	4,26		
	1010 Willie	4	9,57	38,28	4,78	

4202	4208	3303	5223	8287		
Hues realizable for EXTERIOR						

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Exterior mural surfaces

SPRAY SAN 0.911. or ARDSAN RISANANTE MURALE s. 0.916 (in the case of surfaces with mould, moss or bacterial infestations)

Mortar ARDPLAN AS/BS s. 1.962 (only for imperfections)

ISOLEX s. 0.081 or ISOLEX W s. 0.085 (on chalky surfaces)

PAINTGUM 7 FONDO COPRENTE s. 0.584

solvent based odourless pigmented impregnating sealer

The amount of binder & the use of solvents offer a deep penetration through the substrate's capillary network.

It consolidates unsound mural surfaces in depth & adheres firmly even to extremely compact substrates.

The optimum covering power uniforms heterogeneous cromatics, regulates the absorption of the substrate & creates the best conditions for the finishings. It resists against mould and microorganisms, does not contain water & can be applied & stored at temperatures as low as 0°C.

TECHNICAL DATA SHEET n°198





25-30% in volume of ACQUARAGIA INODORE s. 0.970



13-18% in volume of ACQUARAGIA INODORE s. 0.970





recoatable after 24 hrs

READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.584	1010 white	15	22,52	337,80	2,81

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR PACKAGING [1] €/L €/PACKAGING €/m ²			€/m²	
0.584	1010 white 15		22,52	337,80	2,81

/ ₂ 02	4208	3303	5223	8287	
4202	4200	3303	3223	0207	
Hues realizable for EXTERIOR					

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Treat mouta with ANDSAN NISANANTE MONALE 5. 0.710				
Chalk free surfaces	Chalky surfaces			
Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)	Remove any unsound paintwork & efflorescence			
ISOLEX s. 0.081	malta ARDPLAN AS/BS s. 1.962 (solo per stuccare eventuali rappezzi, fori o crepe)			
130LEX 3. 0.001	ISOLEX s. 0.081			

PAINTGUM 7 FILL

s. 0.585

solvent based impregnating filling insulator for exteriors

Primer for exteriors based on unsaponifiablebinders, mineral sands with selected granulometry & mild odour solvents. The high binder content & the use of solvents with appropriate superficial tension, offer an outstanding penetration even in the deepest areas, through the substrate's capillary network. This product therefore consolidates unsound mural surfaces in depth & adheres firmly even to extremely compact substrates.

The optimum filling power uniforms heterogeneous rugosity and regulates the absorption of the substrate creating the best conditions for finishes. These remarkable properties make it the perfect product for patchy surfaces in reinforcement concrete and prefabs.

TECHNICAL DATA SHEET n°199





20-25% in volume of ACQUARAGIA INODORE s. 0.970



10-20% in volume of ACQUARAGIA INODORE s. 0.970





recoatable after 24 hrs

READY HUES						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.585	1010 white	15	23,47	352,05	4,69	

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [16 COLOURS]						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.585	1010 white	15	23,47	352,05	4,69	

4202	4208	3303	5223	8287	
Hues realizable for EXTERIOR					

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Treat mouta with ARDSAN RISANANTE MORALE 5. 0.710				
Chalk free surfaces	Chalky surfaces			
	Remove any unsound paintwork & efflorescence			
Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)	Mortar ARDPLAN AS/BS s. 1.962 (for imperfections)			
	ISOLEX s. 0.081			

PRIMER MURALE s. 0.074

mineral based neutralizer for interior & exterior walls

Product based on mineral salts & specific additives in concentrated aqueous solution. Its versatile

- performance offers an optimum solution to the most common problems such as:
 PATCHING: PRIMER MURALE is ideal for the pre-treatment of surfaces with patches of smoke, nicotine, soot, damp etc.
- SEALING: optimum combination of penetration & impregnation reducing the the surfaces'absorption.
- CONSOLIDATION: the crystallization of the salts in the plaster's capillary network arrests the chalking & decaying process of mineral surfaces.

It is suitable for interior & exterior surfaces in cement/lime plaster, plaster of Paris, plasterboard & old sound paintwork.

TECHNICAL DATA SHEET n°177



ready to use







READY HUES							
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²		
0.074	0000 trasparent	15	4,87	73,05	0,54		
		5	5,91	29,55	0,66		

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Bare mural surfaces

Clean thoroughly removing any dust, filth or unsound parts

SALVAFERRO s. 0.293 - 0.296

high performance micaceous enamel

Highly prestigious enamel based on selected micaceous iron oxide & particular resins which lend an astounding exterior durability as well as the following properties: BARRIER EFFECT, SHIELDING EFFECT, PASSIVATING EFFECT.

Excellent metallic effect finish for iron structures exposed to humid, industrial or marine environments. Its unique aesthetics, high-end decorative metallic appearance & protective power make it the ideal product for iron articles such as gates, street lamps, railings, balconies & grates.

TECHNICAL DATA SHEET n°13 - 17





7-10% in volume of ACQUARAGIA INODORE s. 0.970



7-10% in volume of ACQUARAGIA INODORE s. 0.970



6.04

8% in volume of DILUENTE SINTETICO RAPIDO s. 0.976



trasparent

approx. 4,5 m^2/l with 2 layers



allow 24 hrs between layers, recoatable after 24 hrs

READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² 90,98 8,09 2,5 2 pcs 36,39 0.293 showcard hues fine grain 0,750 6 pcs 37,29 27,97 8,29 38,53 96,33 2,5 2 pcs 8,56 0.296 showcard hues coarse grain 39,43 29,57 0,750 8,76 6 pcs 2,5 26,29 65,73 5.84 2 pcs 0.293 0000 trasparent

27.19

COLOR RANGE



Showcard SALVAFERRO

TINTING SYSTEMS [WIZARD]							
SERIES	COLOR	PACKAGING [l] €/l			€/PACKAGING	€/m²	
0.293	0.293		2 pcs	36,39	90,98	8,09	
fine grain showcard hues	0,750	6 pcs	37,29	27,97	8,29		
0.296 showcard hues		2,5	2 pcs	38,53	96,33	8,56	
		0,750	6 pcs	39,43	29,57	8,76	

6 pcs

0.750



Showcard SALVAFERRO

APPLICATION METHOD & SURFACE PREPARATION

20.39

Apply ARDINOX s. 0.032 for a long lasting cycle

Apply Arbinon's. 0.032 for a long lasting cycle				
Bare iron surfaces	Painted & unsound iron surfaces			
Remove any rust and/or flaking metal using a metal brush	Remove any rust & unsound paintwork			
Degrease and sand thoroughly				

SALVAFERRO TRASPARENTE s. 0.293 is ideal for glossy finishes on surfaces treated with SALVAFERRO, it lends exclusive aesthetics & added protection. THINNING: 5-6% in volume of ACQUARAGIA INODORE s. 0.970 with brush; 6% in volume of DILUENTE SINTETICO RAPIDO s. 0.976 with roller. YIELD: 18 m²/l

NEOARD s. 0.154

top quality glossy enamel

First quality enamel based on special alkyd resins & lightfast outdoor resistant pigments. It features an outstanding colourfastness, gloss, elasticity, adherence together with good anticorrosive properties & scratch resistance.

It is the perfect product for topclass finishes on interior/exterior iron & woodwork.

TECHNICAL DATA SHEET n°3 - 23






6% in volume of ACQUARAGIA INODORE s. 0.970



6% in volume of ACQUARAGIA INODORE s. 0.970







READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² 2,5 2 pcs 34,40 86,00 3,82 **1010** white **9020** black 0,750 6 pcs 35,30 26,48 3,92 & showcard hues 0,375 12 pcs 36,95 13,86 4,10 2,5 2 pcs 34,40 86,00 2,65 0.154 9539 aluminium 0,750 6 pcs 35,30 26,48 2,71 0,375 36,95 12 pcs 13,86 2,84 38,61 96,53 2,5 2 pcs 4,29 5176 - 5183 - 5197 0,750 6 pcs 39,51 29,63 4,39 0,375 12 pcs 41,16 15,44 4,57

COLOR RANGE



TINTING SYSTEMS [WIZARD]							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
		2,5	2 pcs	34,40	86,00	3,82	
	1010 white	0,750	6 pcs	35,30	26,48	3,92	
0.154		0,375	12 pcs	36,95	13,86	4,10	
	1032 medium white	2,370	2 pcs	31,63	74,96	3,51	
		0,712	6 pcs	32,53	23,16	3,61	
		0,356	12 pcs	34,18	12,17	3,80	
		2,250	2 pcs	27,53	61,94	3,06	
	1033 neutral white	0,675	6 pcs	28,43	19,19	3,16	
		0,337	12 pcs	30,08	10,14	3,34	



APPLICATION METHOD & SURFACE PREPARATION								
Bare iron surfaces	Painted & unsound iron surfaces	Bare wooden surfaces Painted wooden surfaces						
Remove any rust and/or flaking metal using a metal brush	Remove any rust and unsound paintwork	LITOSTUCCO s. 1.050 for interior stuccoing & a synthetic stucco for exteriors						
ARDINOX s. 0.032 ARDINOX s. 0.032 or BASE s. 0.025		Sand thoroughly & aplly ARDEOLITE s. 0.022 Sand thoroughly						

ARDEOL s. 0.151

gloss anti-rust enamel

Synthetic enamel based on alkyd resins & lightfast pigments. It features a good gloss and hiding power & corrosion protection. It is ideal for finishing both interior & exterior iron or woodwork.

TECHNICAL DATA SHEET n°4





6-7% in volume of ACQUARAGIA INODORE s. 0.970



6-7% in volume of ACQUARAGIA INODORE s. 0.970



7% in volume of DILUENTE SINTETICO RAPIDO s. 0.976



8-8,5 m²/l with 2 layers



allow 24 hrs between layers

READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² **1010** white 63,30 2,5 2 pcs 25,32 3,07 **9020** black 0,750 26,22 19,67 6 pcs 3,18 & showcard hues 0.151 **1010** white 0,375 12 pcs 27,87 10,45 3,38 **9020** black

COLOR RANGE



Showcard ARDEOL

TINTING SYSTEMS [WIZARD]							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
		2,5	2 pcs	25,32	63,30	3,07	
	1010 white 9020 black	0,750	6 pcs	26,22	19,67	3,18	
,	7020 Black	0,375	12 pcs	27,87	10,45	3,38	
	1032 medium white	2,370	2 pcs	23,14	54,84	2,80	
0.151		0,712	6 pcs	24,04	17,12	2,91	
		0,356	12 pcs	25,69	9,15	3,11	
		2,250	2 pcs	20,21	45,47	2,45	
	1033 neutral white	0,675	6 pcs	21,11	14,25	2,56	
		0,337	12 pcs	22,76	7,67	2,76	



APPLICATION METHOD & SURFACE PREPARATION							
Bare iron surfaces	Painted & unsound iron surfaces	Bare wooden surfaces	Painted wooden surfaces				
Remove any rust and/or flaking metal using a metal brush. Degrease and sand thoroughly		LITOSTUCCO s. 1.050 for interior stuccoing & a synthetic stucco for exteriors					
ARDINOX s. 0.032 ARDINOX s. 0.032 or BASE s. 0.025		Sand thoroughly & apply ARDEOLITE s. 0.022 Sand thoroughly					

NEOSILK s. 0.252

top quality alkyd-urethaned satiny enamel

Solvent based satiny enamel based on urethaned alkyd resins and anticorrosive pigments. Specifically ideal to protect external surfaces, it guarantees an high resistance to sun rays and bad weather. Used in interiors, presents a really low tendency to yellowing, even in light hues.

Neosilk is featured by a wide time of workability and an excellent flow.

It can be applied on any substrate made of wood, iron and metal properly treated.

NEOSILK WARREN HARMEN BERNELLER

TECHNICAL DATA SHEET n°38



max. 6% in volume of ACQUARAGIA INODORE s. 0.970



max. 6% in volume of ACQUARAGIA INODORE s. 0.970



max. 6% in volume of
) DILUENTE SINTETICO RAPIDO s. 0.976



approx. 8 m²/l with 2 layers



allow 24 hrs between layers

READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² 37,78 2,5 2 pcs 94,45 4,72 **1010** white 0.252 0,750 6 pcs 38,68 29,01 4,83 **9020** black 0,375 5,04 40,33 15,12 12 pcs

COLOR RANGE



	TINTING SYSTEMS [WIZARD]							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
		2,5	2 pcs	37,78	94,45	4,72		
	1010 white	0,750	6 pcs	38,68	29,01	4,83		
O.LOL		0,375	12 pcs	40,33	15,12	5,04		
	1032 medium white	2,370	2 pcs	36,12	85,60	4,51		
		0,712	6 pcs	37,02	26,36	4,63		
		0,356	12 pcs	38,67	13,77	4,83		
		2,250	2 pcs	30,63	68,92	3,83		
	1033 neutral white	0,675	6 pcs	31,53	21,28	3,94		
		0,337	12 pcs	33,18	11,18	4,15		

1001 COLORS 🐟	Fan-deck 1001 COLORS
O CONTRACTOR OF THE PARTY OF TH	S 2050 Fan-deck NCS 2050
MALIM	n-deck NL K7

APPLICATION METHOD & SURFACE PREPARATION								
Bare iron surfaces	Painted & unsound iron surfaces	Bare wooden surfaces Painted wooden surfaces						
Remove any rust and/or flaking metal using a metal brush. Degrease and sand thoroughly	Remove any rust and unsound paintwork	LITOSTUCCO s. 1.050 for interior stuccoing & a synthetic stucco for exteriors						
ARDINOX s. 0.032 ARDINOX s. 0.032 or BASE s. 0.025		Sand thoroughly & apply ARDEOLITE s. 0.022 Sand thoroughly						

ARDSILK s. 0.250

top quality synthetic satiny enamel

Top quality satiny enamel based on urethaned alkyd resins & anticorrosive pigments. It is easy to apply, features an excellent flow & covering power, good adherence & scratch/rust resistance. It contains special additives which impede the aggressive action caused by UV rays resulting in a pleasant velvet- like effect both on interior/ exterior wooden or iron substrates.

TECHNICAL DATA SHEET n°7





6% in volume of ACQUARAGIA INODORE s. 0.970



6% in volume of ACQUARAGIA INODORE s. 0.970



6% in volume of DILUENTE SINTETICO RAPIDO s. 0.976



8-9 m²/l with 2 layers



allow 24 hrs between layers

READY HUES €/PACKAGING SERIES COLOR PACKAGING [I] €/l €/m² 35,05 87,63 2,5 2 pcs 4,12 **1010** white 0.250 35,95 0,750 6 pcs 26,96 4,23 **9020** black 37,60 14,10 0,375 12 pcs 4,46

COLOR RANGE



TINTING SYSTEMS [WIZARD]							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
		2,5	2 pcs	35,05	87,63	4,12	
-	1010 white	0,750	6 pcs	35,95	26,96	4,23	
		0,375	12 pcs	37,60	14,10	4,46	
	1032 medium white	2,370	2 pcs	32,08	76,03	3,77	
		0,712	6 pcs	32,98	23,48	3,88	
		0,356	12 pcs	34,63	12,33	4,07	
		2,250	2 pcs	28,08	63,18	3,30	
	1033 neutral white	0,675	6 pcs	28,98	19,56	3,41	
		0,337	12 pcs	30,63	10,32	3,60	

1001 COLORS 🐟	Fan-deck 1001 COLORS
• NO	S 2050 Fan-deck NCS 2050
MALIM	n-deck AL K7

APPLICATION METHOD & SURFACE PREPARATION								
Bare iron surfaces	Painted & unsound iron surfaces	Bare wooden surfaces Painted wooden surfaces						
Remove any rust and/or flaking metal using a metal brush. Degrease and sand thoroughly	Remove any rust and unsound paintwork	LITOSTUCCO s. 1.050f or interior stuccoing & a synthetic stucco for exteriors						
ARDINOX s. 0.032	ARDINOX s. 0.032 ARDINOX s. 0.032 or BASE s. 0.025		Sand thoroughly					

STEELGUARD s. 0.290

protective coating for zincked surfaces

Protective coating featuring an optimum resistance to weather extremes and industrial environments. It is the perfect product for the protection and decoration of galvanised sheet iron (roofs, gutters, down-pipes etc.) as it offers long-lasting impermeability, elasticity & substrate adhesion.

ts thermoplastic property results in a poor scratch resistance therefore it is not suitable for the decoration of galvanized sheet iron subject to abrasion, rubbing, compression or other mechanical actions, as for example roller blinds, metal furniture or structures wich need to be stacked or packed.

STEELGUARD


TECHNICAL DATA SHEET n°8



13-15% in volume of DILUENTE SINTETICO RAPIDO s. 0.976







READY HUES								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
0.290	showcard hues	2,5	2 pcs	36,72	91,80	4,74		
0.270	Showcard nues	0,750	6 pcs	37,62	28,22	4,85		

COLOR RANGE



Showcard STEELGUARD

APPLICATION METHOD & SURFACE PREPARATION							
Bare zinc surfaces	Partially corroded zinc surfaces	Zinc surfaces with unsound paintwork					
DILUENTE NITRO EXTRA s. 0.972	Remove any trace of rust	Remove any previous paintwork with ARDSTRIP s. 0.921					
(in case of resinous woods)	Degrease with DILUENTE NITRO EXTRA s. 0.972						
	DILUENTE NITRO EXTRA s. 0.972	Degrease with					
Sand and clean from dust or dirt	PRIMER UNIVERSALE s. 0.006	Degrease with DILUENTE NITRO EXTRA s. 0.972					

ARDLUX s. 0.141

glossy universal rapid enamel

Synthetic enamel based on modified alkyd-resins & light-fast coloured pigments. Such components offer exceptionally fast air drying, elasticity, adherence & colour stability. It provides a full, hard, glossy & highly covering film which also resists weather agents, fuels &

lubricating oils.

It is ideal for top quality finishes on interior/exterior metal end items (agricultural machines, industrial vehicles, pumps, compressors, shelving, scaffolding, carpentry etc.)

TECHNICAL DATA SHEET n°12





6-7% in volume of ACQUARAGIA INODORE s. 0.970



9-10% airless spray gun, 18-20% air spray gun, in volume of DILUENTE NITRO EXTRA s. 0.972



approx. 10 m²/l with 2 layers (air spray gun) or with 1 layer (airless spray gun)



READY HUES								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
0.141	1010 white 9020 black	2,5	2 pcs	32,28	80,70	3,22		
0.141	& showcard hues	0,750	6 pcs	33,18	24,89	3,32		

COLOR RANGE



Showcard ARDLUX

APPLICATION METHOD & SURFACE PREPARATION						
Iron or cast iron surfaces	Aluminum, light alloy or galvanized sheet metal surfaces					
Remove rust and any mill scale with a wire brush, degrease and sand properly	PRIMER UNIVERSALE s. 0.006					
ANTIRUGGINE NITRO GRIGIA s. 0.040						

IDROSMALTO LUCIDO s. 0.137

glossy water-dilutable mould resistant enamel for walls

Water-dilutable enamel devised for mural surfaces in densely populated in densely populated premises. It features a remarkable resistance to atmospheric agents, therefore, it is particularly suitable for exteriors.


The absence of toxic volatile compounds makes it a low environmental impact product, nonflammable & particularly suitable for poorly aired premises.

& particularly suitable for poorly aired premises. It is ideal for food industries which comply with the EU Regulation 852/2004 (HACCP protocol). The mould resistant properties guarantee the best hygiene possible even in areas where cleaning & disinfecting is difficult. Complies with UNI 15457 (anti-mould).

TECHNICAL DATA SHEET n°24

5-15% in water volume

6 hrs between layers







READY HUES								
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²		
		10		21,40	214,00	2,85		
0.137 glossy	1010 white	2,5	2 pcs	22,40	56,00	2,99		
grossy		1,250	2 pcs	23,30	29,13	3,11		

COLOR RANGE





Showcard LINEA Flyer SISTEMI IDROSMALTO ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS & WIZARD]								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
	1010 white	10		21,40	214,00	2,85		
		2,5	2 pcs	22,40	56,00	2,99		
0.137		1,250	2 pcs	23,30	29,13	3,11		
glossy		9		20,61	185,49	2,75		
	1023 neutral white	2,250	2 pcs	21,57	48,53	2,88		
		1,125	2 pcs	22,47	25,28	3,00		



Only with 16 Colours



	APPLICATION METHOD & SURFACE PREPARATION							
Bare interior surface	Interior surfaces with distemper paintwork	Interior surfaces with old enamel paintwork	Exterior surfaces					
LITOSTUCCO s. 1.050 (for imperfections)		CO s. 1.050 rfections)	December the conferen	ARDPLAN AS/BS s. 1.962 (for imperfections)				
lo	BIANCOFIX s. 0.079 or ISOLEX W s. 0.085 n extremely absorbant surface	Roughen the surface	ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075					

IDROSMALTO SATINATO s. 0.237

satin water-dilutable mould resistant enamel for walls

Water-dilutable enamel devised for mural surfaces in densely populated in densely populated premises. It features a remarkable resistance to atmospheric agents, therefore, it is particularly suitable for exteriors.

The absence of toxic volatile compounds makes it a low environmental impact product, nonflammable & particularly suitable for poorly aired premises. water based


It is ideal for food industries which comply with the EU Regulation 852/2004 (HACCP protocol). The mould resistant properties guarantee the best hygiene possible even in areas where cleaning & disinfecting is difficult. Complies with UNI 15457 (anti-mould).

DROSMALTO CLASSE DILAVABILITÀ ANTIMUFFA

TECHNICAL DATA SHEET n°25



5-15% in water volume





(D)	6 hrs between	layers
-----	---------------	--------

READY HUES									
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²			
		10		21,21	212,10	2,83			
0.237 satin	1010 white	2,5	2 pcs	22,21	55,53	2,96			
		1,250	2 pcs	23,11	28,89	3,08			

COLOR RANGE





Showcard LINEA IDROSMALTO

Flyer SISTEMI ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
0.237 satin	1010 white	10		21,21	212,10	2,83	
		2,5	2 pcs	22,21	55,53	2,96	
		1,250	2 pcs	23,11	28,89	3,08	
	1023 neutral white	9		20,43	183,87	2,72	
		2,250	2 pcs	21,39	48,13	2,85	
		1,125	2 pcs	22,29	25,08	2,97	



APPLICATION METHOD & SURFACE PREPARATION							
Bare interior surface	Interior surfaces with distemper paintwork	Interior surfaces with washable emulsion paintwork	Interior surfaces with old enamel paintwork	Exterior surfaces			
LITOSTUCCO s. 1.050 (for imperfections)		CO s. 1.050 rfections)	December the conferen	ARDPLAN AS/BS s. 1.962 (for imperfections)			
[0]	BIANCOFIX s. 0.079 or ISOLEX W s. 0.085 n extremely absorbant surface	Roughen the surface	ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075				

IDROSMALTO OPACO s. 0.238

matt water-dilutable mould resistant enamel for walls

Water-dilutable enamel devised for mural surfaces in densely populated in densely populated premises. It features a remarkable resistance to atmospheric agents, therefore, it is particularly suitable for exteriors.

The absence of toxic volatile compounds makes it a low environmental impact product, nonflammable & particularly suitable for poorly aired premises.

& particularly suitable for poorly aired premises. It is ideal for food industries which comply with the EU Regulation 852/2004 (HACCP protocol). The mould resistant properties guarantee the best hygiene possible even in areas where cleaning & disinfecting is difficult. Complies with UNI 15457 (anti-mould).

TECHNICAL DATA SHEET n°26






SERIES


0.238

matt

5-10% in water volume







READY HUES								
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²		
		10		21,00	210,00	2,80		
0.238 matt	1010 white	2,5	2 pcs	22,00	55,00	2,93		
		1,250	2 pcs	22,90	28,63	3,05		

2 pcs

2 pcs

2,250

1,125

1023 neutral white

COLOR RANGE





Showcard LINEA Flyer SISTEMI
IDROSMALTO ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS & WIZARD]							
COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²		
	10		21,00	210,00	2,80		
1010 white	2,5	2 pcs	22,00	55,00	2,93		
	1,250	2 pcs	22,90	28,63	3,05		
	9		20,21	181,89	2,69		

21,17

22,07



Only with	16	Colours	

◆ NCS 2050	Fan-deck NCS 2050
------------	----------------------

APPLICATION METHOD & SURFACE PREPARATION						
Bare interior surface	Interior surfaces with distemper paintwork	Interior surfaces with washable emulsion paintwork	Interior surfaces with old enamel paintwork	Exterior surfaces		
LITOSTUCCO s. 1.050 (for imperfections)		CO s. 1.050 rfections)	December the conferen	ARDPLAN AS/BS s. 1.962 (for imperfections)		
lo	BIANCOFIX s. 0.079 or ISOLEX W s. 0.085 n extremely absorbant surface	Roughen the surface	ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075			

47,63

24,83

2,82

2,94

OVERGROUND s. 0.939

satin water based enamel for floors and tiles

Professional enamel, based on particular high performance acrylic polymers, able to assure treated floors an high resistance to abrasion and footsteps, together with a pleasant satin look. The film obtained has an high mechani- cal resistance, so that it is the ideal product to paint floors and vertical surfaces, bringing them a good resistance to greasy dirt. Thank to this, they can be cleaned with the common alcohol free detergents. It has a remarkable adhesion on difficult surfaces such as ceramic, grés, clinker, terracotta tiles, ect. It is ideal for private horizontal si- gnage in parking areas, playgrounds and tarmac in general. Being non-flammable and free of unpleasant odours, it is ideal for poorly aired rooms & highly populated public premises. It is validated for usage in food industry in compliance with the CE no 852/2004 Regulation (HACCP protocol).

Therefore, it is suitable for walls, ceilings and surfaces which are required to be resistant to washing and mould, in premises with presence of food according to UNI 11021 regulation.



TECHNICAL DATA SHEET n°32



dilute 5-8% in water volume



dilute 5% in water volume





recoatable after 6 hrs

READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
0.939	1010 white	2,5	2 pcs	37,56	93,90	5,01
0.737	1010 White	0,750	6 pcs	38,46	28,85	5,13

COLOR RANGE



Showcard LINEA SMALTI

	TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
	1010 white	2,5	2 pcs	37,56	93,90	5,01	
	TOTO White	0,750	6 pcs	38,46	28,85	5,13	
0.939	1022 medium white	2,370	2 pcs	35,95	85,20	4,79	
0.737	1022 medium white	0,712	6 pcs	36,85	26,24	4,91	
	1023 neutral white	2,250	2 pcs	35,95	80,89	4,79	
	1023 Heatrat White	0,675	6 pcs	36,85	24,87	4,91	



ADDITIVES

OVERGROUND ADHESION PROMOTER s. 0.930

Add a bottle of **Overground Adhesion Promoter** per each 0,750 litres pack size and 3 bottles with the 2,5 litres pack size. Mix it properly and, after about 10 minutes, proceed with dilution if needed. **Overground Adhesion Promoter** will remain effective no more than 3 days, after which you simply redose.

SERIES: 0.930

COLOR: 0000 trasparent

PACKAGING: 10 ml - 12 pz

€/pcs: 10,51

€/PACKAGING: 126,12

OVERGROUND GRIP s. 1.933

After minimum 6 hours from the application of the first layer, proceed with the second one by adding 1 bottle of **Overground Grip** for each 0,750 litres pack size and 3 bottles for the 2,5 litres pack size. Mix it properly and apply in crosswise fashion to get an higher anti-slip effect.

SERIES: 1.933

COLOR: 0050

PACKAGING: 90 g - 6 pz

€/pcs: 8,42

€/PACKAGING: 50,52

APPLICATION METHOD & SURFACE PREPARATION

Concrete surfaces Tiles

Apply one or more layers ISOLEX W s. 0.085 diluted 1:1 in water

The surface has to be perfectly degreased, without detergent remains and dry

OVER SATINATO s. 0.232

water-dilutable scratch resistant satiny enamel

Professional enamel based on particular polyurethane polymers which lend a lacquer effect with an excellent scratch/abrasion resistance. The remarkable blocking resistance makes it the perfect paint for door/window frames. The good greasy-dirt resistance results in a product that can be cleaned with common alcohol free detergents. The good resistance to atmospheric agents guarantee an exceptional durability whether in or outdoors (guaranteed by the remarkable adhesion & elasticity). The prolonged open time makes it easy to apply and the originating film has a good body, optimal flow and does not yellow. It is non-flammable, free of unpleasant odours and ideal for poorly aired rooms & public premises. It is a high quality finish ideal for protection of either wooden and iron surfaces.



TECHNICAL DATA SHEET n°22



ready to use (if necessary 5-10% in water volume)



5% in water volume





approx. 7,5 m²/l with 2 layers



recoatable after 24 hrs

READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² 2,5 42,39 105,98 2 pcs 5,65 0.232 **1010** white 0,750 6 pcs 43,29 32,47 5,77

COLOR RANGE



TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
	1010 white	2,5	2 pcs	42,39	105,98	5,65
	1010 white	0,750	6 pcs	43,29	32,47	5,77
0.232	1022 medium white	2,370	2 pcs	40,78	96,65	5,44
0.232		0,712	6 pcs	41,68	29,68	5,56
	1023 neutral white	2,250	2 pcs	40,78	91,76	5,44
	1023 Heatrat Willte	0,675	6 pcs	41,68	28,13	5,56

• NO	CS 2050	Fan-deck NCS 2050				
NAL IV						
1001 COLORS Fan-deck 1001 COLORS						

APPLICATION METHOD & SURFACE PREPARATION							
Iron surfaces	Bare wooden exterior surfaces	Bare wooden interior surfaces	PVS surfaces				
Remove any rust and/or flaking metal using a metal brush and sand thoroughly	TEMA PITTURA OPACA	LITOSTUCCO s. 1.050 (for imperfections)	Degrease with DILUENTE NITRO EXTRA s. 0.972				
Degrease with DILUENTE NITRO EXTRA s. 0.972	RIEMPITIVA DI FONDO s. 0.028	TEMA PITTURA OPACA RIEMPITIVA DI FONDO s. 0.028	DILUENTE NITRO EXTRA S. 0.972				
OVER ANTIRUGGINE s. 0.039		RILMFITTVA DI FUNDU S. 0.020					

OVER OPACO s. 0.234

water-dilutable scratch resistant matt enamel

Professional enamel based on particular polyurethane polymers which lend a lacquer effect with an excellent scratch/abrasion resistance. The remarkable blocking resistance makes it the perfect paint for door/window frames. The good greasy-dirt resistance results in a product that can be cleaned with common alcohol free detergents. The good resistance to atmospheric agents guarantee an exceptional durability whether in or outdoors (guaranteed by the remarkable adhesion & elasticity). The prolonged open time makes it easy to apply and the originating film has a good body, optimal flow and does not yellow. It is non-flammable, free of unpleasant odours and ideal for poorly aired rooms & public premises. It is a high quality finish ideal for protection of either wooden and iron surfaces.

CAM CITET EMBELLA I BRIGHT INTERNAL CITET EMBELLA I BRIGHT EMBELLA I


TECHNICAL DATA SHEET n°28



ready to use (if necessary 5-10% in water volume)



5% in water volume





approx. 7,5 m²/l with 2 layers



recoatable after 24 hrs

READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² 2,5 42,39 105,98 5,65 2 pcs 0.234 **1010** white 0,750 6 pcs 43,29 32,47 5,77

COLOR RANGE



TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
	1010hita	2,5	2 pcs	42,39	105,98	5,65
	1010 white	0,750	6 pcs	43,29	32,47	5,77
0.234	1022 medium white	2,370	2 pcs	40,78	96,65	5,44
0.234	1022 medium white	0,712	6 pcs	41,68	29,68	5,56
	1023 neutral white	2,250	2 pcs	40,78	91,76	5,44
	1023 Heatrat Willte	0,675	6 pcs	41,68	28,13	5,56

• NO	CS 2050	Fan-deck NCS 2050			
RAL K7 Fan-deck					
1001 COLORS ◆ Fan-deck 1001 COLORS					

APPLICATION METHOD & SURFACE PREPARATION							
Iron surfaces	Bare wooden exterior surfaces	Bare wooden interior surfaces	PVS surfaces				
Remove any rust and/or flaking metal using a metal brush and sand thoroughly	TEMA PITTURA OPACA	LITOSTUCCO s. 1.050 (for imperfections)	Degrease with DILUENTE NITRO EXTRA s. 0.972				
Degrease with DILUENTE NITRO EXTRA s. 0.972	RIEMPITIVA DI FONDO s. 0.028	TEMA PITTURA OPACA RIEMPITIVA DI FONDO S. 0.028					
OVER ANTIRUGGINE s. 0.039		MEMI HVA BIT GNBG 3. 0.020					

TEMA LUCE s. 0.135

odourless water-dilutable glossy enamel

Top-quality enamel formulated with a blend of acrylic polymers in aqueous dispersion & non-toxic lightfast colour pigments. These components lend outstanding resistance to atmospheric agents, excellent colourfastness, remarkable adherence & elasticity.

It is very easy to apply and produces a glossy, full film featuring high opacity and perfect flow. Odourless & non-flammable. It is a universal enamel suitable for top-quality finishes on ironwork, galvanized sheet iron, aluminium, light alloys, woodwork, plastic, asbestos cement & mural surfaces.

TECHNICAL DATA SHEET n°14





5-8% in water volume



1-3% in water volume



10-15% in water volume (air spray gun)



7,3-7,8 m²/l with 2 layers



recoatable after 6 hrs

READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² **1010** white 10 36,91 369,10 4,92 37,91 94,78 2,5 2 pcs 5,05 0.135 **1010** white 38,81 0,750 29,11 5,17 6 pcs 9020 black 0,375 12 pcs 40,46 15,17 5,39

COLOR RANGE



TINTING SYSTEMS [16 COLOURS & WIZARD]								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
		2,5	2 pcs	37,91	94,78	5,05		
	1010 white 9020 black	0,750	6 pcs	38,81	29,11	5,17		
	7020 Black	0,375	12 pcs	40,46	15,17	5,39		
	1022 medium white	2,370	2 pcs	36,44	86,36	4,86		
0.135		0,712	6 pcs	37,34	26,59	4,98		
		0,356	12 pcs	38,99	13,88	5,20		
		2,250	2 pcs	36,44	81,99	4,86		
	1023 neutral white	0,675	6 pcs	37,34	25,20	4,98		
		0,337	12 pcs	38,99	13,14	5,20		



APPLICATION METHOD & SURFACE PREPARATION							
Iron surfaces	Bare aluminium surfaces, lightweight alloy or galvanized sheet iron	Bare wooden exterior surfaces	PVC surfaces	Chalky surfaces			
Remove any rust and/ or flaking metal using a metal brush and sand thoroughly	Degrease with DILUENTE NITRO EXTRA s. 0.972	TEMA PITTURA OPACA RIEMPITIVA DI FONDO	Degrease with DILUENTE	ISOLEX s. 0.081 or ISOLEX W s. 0.085 or			
Degrease with DILUENTE NITRO EXTRA s. 0.972	PRIMER W s. 0.008 or PRIMER UNIVERSALE	s. 0.028	NITRO EXTRA s. 0.972	ARDFIX s. 0.070			
ARDINOX s. 0.032 or OVER ANTIRUGGINE s. 0.039	s. 0.006						

TEMA SETA s. 0.235

odourless water-dilutable satiny enamel

Top-quality enamel formulated with a blend of acrylic polymers in aqueous dispersion & non-toxic lightfast colour pigments. These components lend outstanding resistance to atmospheric agents, excellent colourfastness, remarkable adherence & elasticity.

It is very easy to apply and produces a glossy, full film featuring high opacity and perfect flow. Odourless & non-flammable. It is a universal enamel suitable for top-quality finishes on ironwork, galvanized sheet iron, aluminium, light alloys, woodwork, plastic, asbestos cement & mural



TECHNICAL DATA SHEET n°15



5-8% in water volume



1-3% in water volume



10-15% in water volume (air spray gun)



7,1-7,6 m^2/l with 2 layers



allow 5-6 hrs between layers

COLOR RANGE



READY HUES									
SERIES	RIES COLOR PACKAGING [I] €/I €/PACKAGING					€/m²			
	1010 white		10		365,10	5,14			
0.235	1010 white 9020 black	2,5	2 pcs	37,51	93,78	5,28			
		0,750	6 pcs	38,41	28,81	5,41			
		0,375	12 pcs	40,06	15,02	5,64			

TINTING SYSTEMS [16 COLOURS & WIZARD]								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
-		2,5	2 pcs	37,51	93,78	5,28		
	1010 white 9020 black	0,750	6 pcs	38,41	28,81	5,41		
		0,375	12 pcs	40,06	15,02	5,64		
	1022 medium white	2,370	2 pcs	36,09	85,53	5,08		
0.235		0,712	6 pcs	36,99	26,34	5,21		
		0,356	12 pcs	38,64	13,76	5,44		
		2,250	2 pcs	36,09	81,20	5,08		
	1023 neutral white	0,675	6 pcs	36,99	24,97	5,21		
		0,337	12 pcs	38,64	13,02	5,44		



APPLICATION METHOD & SURFACE PREPARATION							
Iron surfaces	Bare aluminium surfaces, lightweight alloy or galvanized sheet iron	Bare wooden exterior surfaces	PVC surfaces	Chalky surfaces			
Remove any rust and/ or flaking metal using a metal brush and sand thoroughly	Degrease with DILUENTE NITRO EXTRA s. 0.972	TEMA PITTURA OPACA RIEMPITIVA DI FONDO	Degrease with DILUENTE	ISOLEX s. 0.081 or ISOLEX W s. 0.085 or ARDFIX s. 0.070			
Degrease with DILUENTE NITRO EXTRA s. 0.972	PRIMER W s. 0.008 or PRIMER UNIVERSALE	s. 0.028	NITRO EXTRA s. 0.972				
ARDINOX s. 0.032 or OVER ANTIRUGGINE s. 0.039	s. 0.006						

ARD DECOR

s. 0.461

coloured transparent protective impregnating agent

for wood


The product, protected against moulds & fungi, doesn't chalk, crack or flake. The wax content repels water gua- ranteeing an outstanding protection. One recoat, without sanding or stripping is sufficient to restore the original aesthetics and protection.

Specific product for the protection & coloured finishing of wooden and items even when exposed to extreme weather (mountainous or marine environments). Its use is, therefore, recommended for doors, frames, casings, blinds, matchboard, garrets, balconies, garden furniture & wooden prefabricates.

TECHNICAL DATA SHEET n°130









READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² 2,5 2 pcs 21,25 53,13 2,43 showcard hues 0,750 6 pcs 22,15 16,61 2,53 17,83 20 356,60 2,04 0.461 0500 colourless 19,83 49,58 2,5 2,27 2 pcs 0,750 20,73 15,55 2,37 6 pcs 6434 - 6440 20 17,92 358,40 2,05

COLOR RANGE



Showcard

TINTING SYSTEMS [WIZARD]								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
		20		17,83	356,60	2,04		
0.461	0500 colourless	2,5	2 pcs	19,83	49,58	2,27		
		0,750	6 pcs	20,73	15,55	2,37		



Showcard LINEA LEGNO

Bare wooden surfaces Wooden surfaces with unsound paintwork	
Sand & remove dust/filth Sand thoroughly to remove any old paintwork	

 $After application of ARD \ DECOR \ s. \ 0.461, to improve \ exteriors \ resistance, apply \ one \ layer \ of \ ARD \ LASUR \ s. \ 0.453$

ARD LASUR

s. 0.453

waxed protective product against wood decay with UV filter

Transparent protective product for wood based on synthetic resins & wax, transparent pigments & particular substances which impede decaying by filtering UV radiation. Such components give the product a number of pluses such as: impregnating action, hydrophobic properties, anti UV action, enhancing effect.

It is protected by the attack of mould and fungi. Optimum satiny finish that ennobles & enhances the natural beauty of both interior & exterior wooden end items (doors, door/window frames & fixtures, garrets, balconies, fences, garden furniture etc.).

TECHNICAL DATA SHEET n°124

ready to use





READY HUES								
SERIES	RIES COLOR PACKAGING [I] €/I €/PACKAGING							
		20		26,25	525,00	3,75		
	0500 colourless	2,5	2 pcs	28,25	70,63	4,03		
0.453		0,750	6 pcs	29,15	21,86	4,16		
	6434 - 6440	2,5	2 pcs	28,25	70,63	4,03		
& showcard hues	0,750	6 pcs	29,15	21,86	4,16			

COLOR RANGE



Showcard LINEA LEGNO

TINTING SYSTEMS [WIZARD]							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
		20		26,25	525,00	3,75	
0.453	0500 colourless	2,5	2 pcs	28,25	70,63	4,03	
		0,750	6 pcs	29,15	21,86	4,16	



Showcard LINEA LEGNO

APPLICATION METHOD & SURFACE PREPARATION

Bare wooden surfaces

Wooden surfaces with unsound paintwork

Sand & remove dust/filth

Sand thoroughly to remove any old paintwork

ARD SHIP s. 0.451

mono-component polyurethane glossy varnish for boats

Transparent varnish for wood based on urethane oil alkyd resins which lend ad exceptional resistance to atmospheric agents & prolonged immersion in brackish water. Easy to apply, it spreads perfectly forming a hard, full & glossy film which preserves elasticity & adherence even when exposed to sun radiation & saltiness.

It is specific for the protection & decoration of wooden structures on boats & wooden surfaces exposed to marine/ mountainous atmospheric agents or radiation.

TECHNICAL DATA SHEET n°125-126





15-16% for the 1st layer, 6-7% for the 2nd layer in volume of ACQUARAGIA INODORE s. 0.970



15-16% for the 1st layer, 6-7% for the 2nd layer in volume of ACQUARAGIA INODORE s. 0.970



16% in volume of DILUENTE SINTETICO RAPIDO s. 0.976



10 m²/l with 2 layers

allow 24 hrs between layers

READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² 2,5 2 pcs 24,40 61,00 2,44 0000 brillant 1 6 pcs 25,30 25,30 2,53 colourless 26,95 2,69 0,500 6 pcs 13,48 0.451 26,95 67,38 2,5 3,37 2 pcs **0500** matt 27,85 27,85 3,41 1 6 pcs 14.75 0.500 6 pcs 29.50 3.69

COLOR RANGE



Showcard LINEA LEGNO

APPLICATION METHOD & SURFACE PREPARATION				
Bare wooden surfaces	Wooden surfaces with unsound paintwork			
Sand & remove dust/filth	Sand thoroughly to remove any old paintwork			

ARD SHIP s. 0.451 matt: DILUIZIONE: 3-4% for the 1st layer, 1-2% for the 2nd layer in volume of ACQUARAGIA INODORE s. 0.970 with brush or roller; max. 4% in volume of DILUENTE SINTETICO RAPIDO s. 0.976 with spray gun. YIELD: $8 \text{ m}^2/\text{l}$

If the wood is to be coloured we recommend applying a layer of ARD DECOR s. 0.461 (satiny impregnator for wood) in the desired colour, sand and apply ARD SHIP s. 0.451

TEMA IMPREGNANTE PER LEGNO

s. 0.441


water based protective impregnating agent for interiors and exteriors


Colourless transparent or pigmented protective product suitable for the protection (mould & fungi) & decoration of wood. Formulated with transparent pigments which enhance the natural beauty of wood, it forms a barrier against UV rays impeding decay & greying. It offers good penetration, elasticity, water repellence & water vapour permeability. There is no health hazard, it is flameproof, odourless & therefore ideal for interiors & poorly aired premises. It is specific for the protection & decoration of interior/exterior wooden end items (matchboard, facades, lofts, balconies etc).

TEMA IMPREGNANTE PER LEGNO

TECHNICAL DATA SHEET n°122







READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² 2,5 2 pcs 25,12 62,80 4,83 showcard hues 0,750 6 pcs 26,02 19,52 5,00 0.441 0500 colourless 361,80 15 24,12 4,38 6434 - 6440

COLOR RANGE



Showcard LINEA LEGNO

TINTING SYSTEMS [16 COLOURS & WIZARD]								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
6434 - 6440 (only 16 Colours)	15		24,12	361,80	4,38			
		2,5	2 pcs	25,12	62,80	4,83		
		0,750	6 pcs	26,02	19,52	5,00		
0.441		15		24,12	361,80	4,38		
	0500 colourless	2,5	2 pcs	25,12	62,80	4,83		
		0,750	6 pcs	26,02	19,52	5,00		



Showcard LINEA LEGNO

APPLICATION METHOD & SURFACE PREPARATION				
Bare wooden surfaces	Wooden surfaces with unsound paintwork			
Treat resinous wood with DILUENTE NITRO EXTRA s. 0.972	Sand thoroughly to remove any old paintwork			
Sand & remove dust/filth	On wood with irregular or highly absorption, apply a first coat of TEMA IMPREGNANTE PER LEGNO s. 0.441 colourless diluted 80-100% with water			

TEMA WOOD PRO

s. 0.443

protective impregnating gel for wood


A transparent or pigmented high dry waxed impregnating agent, suitable for impregnation and protection of wood. Innovative acrylic-alkyd hybrid water technology: excellent wettability of the support, natural appearance of the wood and good protection from sunlight, also thanks to U.V. Surface erosion controlled over time: avoids surface peeling phenomena and allows maintenance and restoration without the need for sanding.

Tema Wood Pro s. 0.443 is protected from mold and fungus. Easy to apply, does not drip, also suitable for applications over the head or in uncomfortable positions. Particularly suitable for the renovation of wooden surfaces such as beading, cladding of facades, attics, beams, balconies, garden furniture.

EMA WOOD PRI

TECHNICAL DATA SHEET n°123







READY HUES							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
	showcard hues	2,5	2 pcs	28,79	71,97	2,61	
0.443		0,750	6 pcs	29,69	22,27	2,70	
		2,5	2 pcs	28,79	71,97	2,61	
	0500 colourless	0,750	6 pcs	29,69	22,27	2,70	
	1100 extra white	2,5	2 pcs	28,79	71,97	2,61	
		0,750	6 pcs	29,69	22,27	2,70	

COLOR RANGE



Showcard

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKA	PACKAGING [l] €/		€/PACKAGING	€/m²
	6434 - 6440 (only 16 Colours)	2,5	2 pcs	28,79	71,97	2,61
0.443		0,750	6 pcs	29,69	22,27	2,70
0500 colourless	2,5	2 pcs	28,79	71,97	2,61	
	0500 colourless	0,750	6 pcs	29,69	22,27	2,70



Showcard LINEA LEGNO

APPLICATION METHOD & SURFACE PREPARATION					
Wood surfaces never painted	Surfaces already treated with enamels or deteriorated paints	Wood with particularly irregular of absorption			
Treat resinous wood with DILUENTE NITRO EXTRA s. 0.972					
Sand & remove dust/filth	Sand thoroughly to remove any old paintwork	Apply a first coat of TEMA WOOD PRO s. 0.443 colourless diluted to 80-100% with water			
make sure that the support is dry (the humidity of the wood should be less than 15%) and apply the product					

TEMA FINITURA CERATA PER LEGNO

s. 0.442

water based protective hydrophobic velvet like product for interiors and exteriors

 $Transparent\ protective,\ which\ film\ not\ only\ filters\ UV\ radiation,\ but\ it\ is\ also\ protected\ against\ mould\ \&\ fungi\ growth.$


It features a good penetration, remarkable elasticity, water repellence with a good water vapour permeability. It is formulated with particular transparent pigments which enhance wood's natural beauty. It does not contain dangerous substances, it is flameproof, odourless, therefore particularly suitable for use in poorly aired interiors.

Its specific for the protection & decoration of interior/exterior wooden end items (matchboard, facades, lofts, balconies etc).

TECHNICAL DATA SHEET n°121



30-40% in water volume for the 1st layer, 20-30% for the 2nd layer





sandable and recoatable

after 6 h

	READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
	showcard hues	2,5	2 pcs	31,82	79,55	6,36	
0.442		0,750	6 pcs	32,72	24,54	6,54	
0.442	0500 colourless 6434 - 6440	15		30,82	462,30	6,16	

COLOR RANGE



Showcard LINEA LEGNO

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
		1	5	30,82	462,30	6,16
	6434 - 6440 (only 16 Colours)	2,5	2 pcs	31,82	79,55	6,36
0.442		0,750	6 pcs	32,72	24,54	6,54
0.442		15		30,82	462,30	6,16
	0500 colourless	2,5	2 pcs	31,82	79,55	6,36
		0,750	6 pcs	32,72	24,54	6,54



Showcard

APPLICATION METHOD & SURFACE PREPARATION				
Bare wooden surfaces	Wooden surfaces with unsound paintwork			
Treat resinous wood with DILUENTE NITRO EXTRA s. 0.972				
Sand & remove dust/filth	Sand thoroughly to remove any old paintwork			
Sand & remove dust/filth. Pretreat with TEMA IMPREGNANTE PER LEGNO s. 0.441 to preserve the natural hue of light coloured wood				

TEMA FINITURA BRILLANTE PER LEGNO

s. 0.440

water based transparent protective wood varnish for interiors and exteriors

Colourless transparent glossy varnish for wood. It is ideal for the decoration & protection of wood. It offers an outstanding resistance against atmospheric agents and good elasticity permitting the film to follow the dimensional variation of wood.


There is no health hazard, its flameproof, odourless & therefore particularly suitable for use in poorly aired interiors. Its specific for the protection & decoration of interior/exterior wooden end items whether in or outdoors (matchboard, facades, lofts, balconies etc).


TECHNICAL DATA SHEET n°120





20-30% in water volume for the 1st layer, 10-20% for the 2nd layer





READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² 2,5 29,23 73,08 5,85 2 pcs 0000 brillant 0.440 colourless 0,750 6 pcs 30,13 22,60 6,03

COLOR RANGE



Showcard LINEA LEGNO

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
0.440	0000 brillant	2,5	2 pcs	29,23	73,08	5,85
0.440	colourless	0,750	6 pcs	30,13	22,60	6,03



Showcard LINEA LEGNO

APPLICATION METHOD & SURFACE PREPARATION					
Bare wooden surfaces	Wooden surfaces with unsound paintwork	Applicazione all'esterno			
Treat resinous wood with DILUENTE NITRO EXTRA s. 0.972					
Sand & remove dust/filth	Sand thoroughly to remove any old paintwork	Pretreat the substrate with one or two layers of coloured TEMA IMPREGNANTE PER LEGNO s. 0.441 to improve protection			
Pretreat with TEMA IMPREGNANTE PER LEGNO s. 0.441 to preserve the natural hue of light coloured wood		3. 0.441 to improve protection			

ARDTOP s. 0.510

matt super washable acryl-siloxanic paint for interiors and exteriors

Highest quality paint, in class 1 of washability according to the EN 13 300 regulation. Without formaldehyde, it guarantees healthy environments from the time of application to its complete maturation, and therefore protecting the environment and the human health. Its acryl – siloxanic base lets obtain washing resistant and friendly stain – removing finishes, nevertheless maintaining a high water vapour permeability and an optimum covering power.

It realizes soft, matt and velvety surfaces; it is an extremely versatile product, thought for painting civil plasters and suitable for the direct application on plasterboard too.

TECHNICAL DATA SHEET n°51





30-35% in water volume for the 1st layer, 25-30% for the 2nd layer



20-25% in water volume (20% for gypsum or plasterboard surfaces)



15-20% in water volume (airless spray gun)



5,8 m²/l with 2 layers



allow 3 hrs between layers

READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² 10 147,40 14,74 2,54 0.510 **1010** white 2,5 2 pcs 16,24 40,60 2,80

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKAGING [l] €/L €/PACKAGING €/m ²				€/m²
4040 17		10		14,74	147,40	2,54
	1010 white	2,5	2 pcs	16,24	40,60	2,80
0.540	1022 medium white	9,2		14,00	128,80	2,41
0.510	1022 medium winte	2,3	2 pcs	15,43	35,49	2,66
	1023 neutral white	8,67		10,32	89,47	1,78
	1023 neutral white	2,16	2 pcs	11,37	24,56	1,96



APPLICATION METHOD & SURFACE PREPARATION						
Bare exterior surfaces	Surfaces with washable latex paintwork Bare interior walls		Already painted or partially degradated exterior walls			
Carefully brush the surface	ARDSAN RISANANTE MURALE s. 0.916	LITOSTUCCO s. 1.050 (only for imperfections)	LITOSTUCCO s. 1.050 (only for imperfections)			
ARDPLAN AS/BS s. 1.962						
(only for imperfections)	ICOLEY W. a. 0.005 ar ICOLEY	ARDFIX s. 0.070 or				
ISOLEX W s. 0.085 or ISOLEX s. 0.081 or ARDFIX s. 0.070 (properly diluted)	ISOLEX W s. 0.085 or ISOLEX s. 0.081 or PG7 FONDO COPRENTE s. 0.584	ISOLEX W s. 0.085 (depending on the conditions of the support)	ARDFIX s. 0.070 or ISOLEX W s. 0.085			

IDROPAINT

s. 0.502

highly washable emulsion paint for interiors and exteriors

Wall paint based on vinylversatic copolymers in aqueous dispersion which lend an optimum outdoor & alkali resistance. It adds a high coverage power, excellent brushability and flow, optimum resistance to scrubbing and washing.

TECHNICAL DATA SHEET n°57





40-50% in water volume for the 1st layer, 35-40% for the 2nd layer



25-30% in water volume



25-30% in water volume (airless spray gun)



approx. 6 m²/l with 2 layers



allow 3 hrs between layers

COLOR RANGE

READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
		14		14,32	200,48	2,39
	1010 white	4		15,82	63,28	2,64
0.502		0,750	6 pcs	18,07	13,55	3,01
	9020 black	4		22,44	89,76	3,74
	9020 black	0,750	6 pcs	24,69	18,52	4,11

	TINTING S	YSTEMS	S [16 CO	LOURS	& WIZARD]	
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
		14		14,32	200,48	2,39
	1010 white	4		15,82	63,28	2,64
		0,750	6 pcs	18,07	13,55	3,01
		12,880		12,89	166,02	2,14
0.502	1022 medium white	3,680		14,24	52,40	2,37
		0,690	6 pcs	16,26	11,22	2,71
		12,130		9,74	118,15	1,62
	1023 neutral white	3,470		10,76	37,34	1,79
		0,650	6 pcs	12,29	7,99	2,05



APPLICATION METHOD & SURFACE PREPARATION								
Bare exterior surfaces Painted exterior surfaces		Bare interior surfaces	Interiors painted with sound washable emulsion paints or distemper					
ARDPLAN AS/BS s. 1.962 (only for imperfections)	ARDSAN RISANANTE MURALE s. 0.916	LITOSTUCCO s. 1.050 (only for imperfections)	LITOSTUCCO s. 1.050 (only for imperfections)					
ARDFIX s. 0.070 or ISOLEX W	ISOLEX W s. 0.085 or ISOLEX	ARDFIX s. 0.070 or ISOLEX W s. 0.085 or ISOLEX s. 0.081	ARDFIX s. 0.070 or					
s. 0.085 or ISOLEX s. 0.081	s. 0.081 or PG7 F0ND0 C0PRENTE s. 0.584	BIANCOFIX s. 0.079 (on dark surfaces)	ISOLEX W s. 0.085					

ARDSALUS AIR REFRESH s. 0.537

class A+ sanitizing washable latex paint against pollution

Special latex paint for interiors able to purify the air from carcinogenic substances as formaldehyde, which is present in a lot of household products too.

Its effectiveness is permanent and is certified according to a 78% of reduction. The special formulation, based on silver ions, allows to obtain finishes which resist to the proliferation of the main bacterial strains, responsible of possible infections. Together with matt appearance, the product has a good covering power and a good washability. For all these features, it results particularly suitable for interior painting, also in situations where the highest hygiene standards are required, such as health facilities or densely populated premises like kindergartens, schools, gyms or dressing rooms. Test reports on Pollutant Reductions (ISO 16000-23) and Resistance to Bacterial Proliferation (ISO 22196:2011) are available on demand.



TECHNICAL DATA SHEET n°139



30-40% in water volume for the 1st layer, 30-35% for the 2nd layer



20-30% in water volume



30-35% in water volume (airless spray gun)



approx. 5,5-6 m^2/l with 2 layers



) allow 2-3 hrs between layers

COLOR RANGE

READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² 14 11,60 162,40 2,02 0.537 **1010** white /, 13,10 52,40 2,28

TINTING SYSTEMS [16 COLOURS & WIZARD]								
SERIES	COLOR PACKAGING [t] €/t €/PACKAGING €/m ²							
0.537	1010 white	14	11,60	162,40	2,02			
	1010 white	4	13,10	52,40	2,28			
	1023 neutral white	12,130	9,74	118,15	1,69			
		3,470	11,00	38,17	1,91			



APPLICATION METHOD & SURFACE PREPARATION					
Bare interior surfaces	Surfaces with sound distemper paintwork or washable latex paint				
LITOSTUCCO s. 1.050 or SILVER STUCK s. 1.963 (only for imperfections)	LITOSTUCCO s. 1.050 (only for imperfections)				

MAISON s. 0.506

super washable latex paint for interiors and exteriors

High performing wall paint which offers optimum refinishing, covering power, whiteness & water vapour permeability. It is easy to apply & it flows, so it offers a refined velvety matt effect. It is an extremely versatile product devised for painting two coat plaster work, precast panels, plaster of Paris & plasterboard.

TECHNICAL DATA SHEET n°69





35-40% in water volume for the 1st layer, 30-35% for the 2nd layer



25-30% in water volume, 20% for gypsum or plasterboard surfaces



15-20% in water volume (airless spray gun)



approx. 7 m^2/l with 2 layers



allow 3 hrs between layers

READY HUES								
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²		
		14		10,57	147,98	1,51		
0.506	1010 white	4		12,07	48,28	1,72		
		1	6 pcs	14,32	14,32	2,04		

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
		14		10,57	147,98	1,51	
	1010 white	4		12,07	48,28	1,72	
		1	6 pcs	14,32	14,32	2,04	
		13,300		10,04	133,53	1,43	
0.506	1022 medium white	3,800		11,47	43,59	1,64	
		0,950	6 pcs	13,60	12,92	1,94	
		12,130		8,67	105,17	1,24	
	1023 neutral white	3,470		9,90	34,35	1,41	
		0,866	6 pcs	11,74	10,17	1,67	



APPLICATION METHOD & SURFACE PREPARATION								
Bare interior surfaces Surfaces with washable latex paintwork		Bare exterior walls	Already painted or partially degradated exterior walls					
LITOSTUCCO s. 1.05	50 (for imperfections)	Carefully brush the surface	ARDSAN RISANANTE MURALE					
	,	ARDPLAN AS/BS s. 1.962	s. 0.916					
		(for imperfections)	ICOLEV a 0.001 an ICOLEV W					
ARDFIX s. 0.070. or ISOLEX W s. 0.085 (on particulary chalky surfaces)		ISOLEX s. 0.081 or ISOLEX W s. 0.085 or ARDFIX s. 0.70 (properly diluted)	ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PG7 FONDO COPRENTE s. 0.584					

UNIQUE s. 0.524

washable latex paint for interiors with an high covering power

Washable odourless latex paint with an high covering power, featured by a good water vapour permeability. It offers matt and consistent finishes, even with one layer. **Unique** is an extremely versatile product, devised for painting two coat plaster work and for direct application on plasterboard.

plasterboard.
Without formaldehyde, in A+ class thanks to the lowest emissions of volatile substances, **Unique** guarantees healthy environments from the time of application to its complete maturation, and therefore protecting the environment and the human health.

TECHNICAL DATA SHEET n°273





15-25% in water volume



10-15% in water volume



20-25% in water volume (airless spray gun)



10-12 m²/l with 1 layer



) allow 3 hrs between layers

READY HUES								
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²			
0.524 1010 white	1010 white	14	10,14	141,96	0,92			
	io io wnite	4	11,64	46,56	4,23			

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES	COLOR PACKAGING [L] €/L €/PACKAGING €/m ²						
0.524 1010 white	1010 white	14	10,14	141,96	0,92		
	io io wnite	4	11,64	46,56	4,23		

With 16 Colours & Wizard

1001 COLORS Fan-deck
1001 COLORS

Only with 16 Colours






APPLICATION METHOD & SURFACE PREPARATION							
Bare interior surfaces	Plasterboard interior surfaces	Particularly chalky surfaces					
LITOSTUCCO s. 1.050 (for imperfections)		ARDFIX s. 0.070 o ISOLEX W s. 0.085 (previously diluted)					
ARDFIX s. 0.070 o ISOLEX W s. 0.085 (on chalky surfaces)	Do not require sealer and can be directly finish with UNIQUE s. 0.524	Allow at least 4 hours proceed with the application of UNIQUE s. 0.524 If needed, allow at least 3 hours and apply a second layer of UNIQUE s. 0.524					

DOMOTICA s. 0.504

super washable latex paint for interiors

Latex matt paint devised on innovative criteria which offers optimal general features and effortless application. It offers a good whiteness, hiding power & optimal washability. It is a modern high performance paint which excels when employed for "touch up work".

TECHNICAL DATA SHEET n°174







30-40% in water volume for the 1st layer, 30-35% for the 2nd layer



20-30% in water volume



30-35% in water volume (airless spray gun)



approx. 5-5,6 m²/l with 2 layers



) allow 2-3 hrs between layers

COLOR RANGE

READY HUES								
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²		
		14		8,42	117,88	1,59		
0.504	1010 white	4		9,92	39,68	1,87		
		1	6 pcs	12,17	12,17	2,30		

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES	COLOR	PACKAGING [l] €/l €/PACKAGING €/m					
	1010 white	14		8,42	117,88	1,59	
		4		9,92	39,68	1,87	
0.504		1	6 pcs	12,17	12,17	2,30	
0.504		12,130		7,07	85,76	1,33	
	1023 neutral white	3,470		8,33	28,91	1,57	
		0,866	6 pcs	10,22	8,85	1,93	

With 16 Colours & Wizard

1001 COLORS

Fan-deck
1001 COLORS

Only with Wizard

NCS 540

Fan-deck
NCS 540

Only with 16 Colours

Fan-deck
NCS 2050

FAL KY Fan-deck

APPLICATION METHOD & SURFACE PREPARATION				
Bare interior surfaces	Surfaces with sound distemper paintwork or washable latex paint			
LITOSTUCCO s. 1.050 or SILVER STUCK s. 1.963 (only for imperfections)	LITOSTUCCO s. 1.050 (only for imperfections)			

AEDILIA s. 0.503

washable emulsion paint for interiors

Emulsion paint which offers good overall qualities and an effortless application. It offers an optimum "whiteness", good hiding power & washability. The special synthetic polymers in emulsion provide a good scrub resistance, ease of application & flow.

TECHNICAL DATA SHEET nº114





30-40% in water volume for the 1st layer, 30-35% for the 2nd layer



15-20% in water volume



30-35% in water volume (airless spray gun)



approx. 5-5,6 m^2/l with 2 layers



2-3 hrs between layers

READY HUES SERIES COLOR PACKAGING [I] **€/PACKAGING** €/m² €/l 14 8,17 114,38 1,54 0.503 **1010** white 4 9,67 38,68 1,82 11,92 2,25 11,92 6 pcs 1

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES	COLOR	PACKAGING [L] €/L €/PACKAGING €/L				€/m²	
		14		8,17	114,38	1,54	
	1010 white	4		9,67	38,68	1,82	
0.503		1	6 pcs	11,92	11,92	2,25	
0.503		12,130		6,86	83,21	1,29	
	1023 neutral white	3,470		8,12	28,18	1,53	
		0,866	6 pcs	10,01	8,67	1,89	

With 1	6 Colours &	Wiza	rd		
	1001 COLORS			-deck 1 COLOF	RS
Only v	vith Wizard				
•	NCS 540	Fan- NCS			
Only v	vith 16 Colou	rs			
•	roccanello	NCS	5 2	050	Fan-deck NCS 2050
	RAL K7 🧇	Fan- RAL		:k	

APPLICATION METHOD & SURFACE PREPARATION

Bare interior surfaces

Surfaces with sound distemper paintwork or washable latex paint

LITOSTUCCO s. 1.050 or SILVER STUCK s. 1.963 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085

LITOSTUCCO s. 1.050 (only for imperfections)

INTERIOR s. 0.525

washable latex paint for interiors

Latex paint featured by an optimum "whiteness", good hiding power & washability. The special synthetic polymers in emulsion provide a good scrub resistance, ease of application & flow.

TECHNICAL DATA SHEET n°74





35-40% in water volume for the 1st layer, 30-35% for the 2nd layer



20-25% in water volume



20-25% in water volume (airless spray gun)



SERIES

0.525

 $5-5,5 \text{ m}^2/l \text{ with 2 layers}$

COLOR

1010 white



allow 2-3 hrs between layers

READY HUES								
PACKAGING [l]	€/l	€/PACKAGING	€/m²					
14	6,50	91,00	1,24					
4	8,00	32,00	1,52					

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.525 1010 white	14	6,50	91,00	1,24		
	iu iu white	4	8,00	32,00	1,52	



APPLICATION METHOD & SURFACE PREPARATION				
Bare interior surfaces	Surfaces with sound distemper paintwork or washable latex paint			
LITOSTUCCO s. 1.050 or SILVER STUCK s. 1.963 (only for imperfections)	LITOSTUCCO s. 1.050 (only for imperfections)			

ARD PAINT s. 0.520

breathable water repellent acryl-siloxane emulsion paintfor interiors & exteriors

Prestigious product which offers a pleasant flat effect. The remarkable covering power & effort free application make **Ard Paint** a specialty product for interior decorating. It can be employed outdoors on two-coat plaster work which is not exposed to weather extremes (balconies, porches etc). The good balance between the vapour permeability and the resistance to chalking results in a perfect product for painting interiors subject to condensation. The low content of volatile substances, extremely mild odour & appealing aesthetics (even on difficult hues) distinguish **Ard Paint**.



TECHNICAL DATA SHEET n°59



35-45% in water volume



15-25% in water volume



15-25% in water volume (airless spray gun)



5,5 m²/l with 2 layers



READY HUES							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
		14		8,65	121,10	1,57	
0.520	1010 white	4		10,15	40,60	1,84	
		0,750	6 pcs	12,40	9,30	2,25	

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²	
		14		8,65	121,10	1,57	
	1010 white	4		10,15	40,60	1,84	
0.520		0,750	6 pcs	12,40	9,30	2,25	
0.520		12,130		7,27	88,19	1,32	
	1023 neutral white	3,470		8,53	29,60	1,55	
		0,650	6 pcs	10,42	6,77	1,89	



APPLICATION METHOD & SURFACE PREPARATION

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

TRASPIRA s. 0.527

solvent free water-repellent breathable interior emulsion paint with remarkable hiding power

Odourless wall paint with an optimum whiteness, devised to protect the health of those living/working in painted premises & environment in general. The remarkable breathability makes it particularly suitable for the painting of interiors as it controls water vapour migration impeding condensation. It features a good brushability & flow resulting in a smooth velvety surface.

TECHNICAL DATA SHEET n°67





30-40% in water volume for the 1st layer, 25-35% for the 2nd layer



25-35% in water volume



25-35% in water volume (airless spray gun)



approx. 5 m²/l with 2 layers



allow 2-3 hrs between layers

READY HUES							
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²		
0.527 1010 white	14	7,04	98,56	1,41			
	io io white	4	8,54	34,16	1,71		

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	SERIES COLOR PACKAGING [1] €/L €/PACKAGING €/m ²					
0.527 1010 white	14	7,04	98,56	1,41		
	TO TO WITH	4	8,54	34,16	1,71	



APPLICATION METHOD & SURFACE PREPARATION

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

BIANCO GENTILE s. 0.521

water-repellent breathable retouchable latex paint

Wall paint with an optimum whiteness and a good covering power. Thanks to the good breathability, the interior finishes allow the water vapour to migrate out of the wall system therefore impeding the formation of condensation. In addition to an optimal covering power and whiteness, it lends an optimum brushability/flow as well as a good cleanability, resulting in velvety smooth surfaces.

TECHNICAL DATA SHEET n°61





35-40% in water volume for the 1st layer, 30-35% for the 2nd layer



20-25% in water volume



20-25% in water volume (airless spray gun)



approx. 5-5,5 m²/l with 2 layers



allow 2-3 hrs between layers

COLOR RANGE

READY HUES							
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²		
0.521 1010	1010 white	14	6,44	90,16	1,23		
	1010 white	4	7,94	31,76	1,51		

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	IES COLOR PACKAGING [l] €/l €/PACKAGING €/m ²					
0.521 1010 white	1010 white	14	6,44	90,16	1,23	
	1010 White	4	7,94	31,76	1,51	



APPLICATION METHOD & SURFACE PREPARATION				
Bare interior surfaces or with distemper paintwork	Interior walls with washable latex paintwork			
LITOSTUCCO s. 1.050 (only for imperfections)	LITOSTUCCO s. 1.050 (only for imperfections)			
ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)	, , ,			
BIANCOFIX s. 0.079 (on dark surfaces)	ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)			

SPAZIO s. 0.541

professional water-repellent breathable latex paint for interiors

Wall paint which offers an optimal whiteness, remarkable brushing and spreading. It is ideal for prestigious finishes on indoor walls. The exceptionally high level of breathability makes it particularly suitable for painting interiors subject to condensation (kitchens, bathrooms etc.).

TECHNICAL DATA SHEET n°178





50-60% in water volume



40-50% in water volume



40-50% in water volume (airless spray gun)



approx. $5-5,5 \text{ m}^2/l \text{ with 2 layers}$



allow 1-2 hrs between layers

READY HUES						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.541 1010 white	1010 white	14	5,49	76,86	1,04	
	iuiu white	4	6,99	27,96	1,33	

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.541 1010 white	14	5,49	76,86	1,04	
	1010 Winte	4	6,99	27,96	1,33



APPLICATION METHOD & SURFACE PREPARATION

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

ARD INTERNI

s. 0.544

professional emulsion paint with optimum covering-power

It is an professional emulsion paint for interiors. It offers a remarkable performance: excellent "whiteness", covering power, vapour permeability, anti-reflection, flow, smooth touch and aesthetical appealing.

TECHNICAL DATA SHEET n°72





45-55% in water volume for the 1st layer, 40-50% for the 2nd layer



25-35% in water volume



25-35% in water volume (airless spray gun)



approx. 4,5-5 m²/l with 2 layers



allow 1-2 hrs between layers

READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.544 1010 white	14	4,92	68,88	1,09	
	io io wnite	4	5,82	23,28	1,29

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	SERIES COLOR PACKAGING [1] €/1 €/PACKAGING €/m ²					
0.544 1010 white	14	4,92	68,88	1,09		
	TO TO WITH	4	5,82	23,28	1,29	



APPLICATION METHOD & SURFACE PREPARATION

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

BIANCO COPRENTE

s. 0.548

matt emulsion paint with optimum covering power

Wall paint with an optimum covering power, which offers a remarkable performance: excellent "whiteness", vapour permeability antireflection, flow, smooth touch and aesthetical appealing.

TECHNICAL DATA SHEET n°71





40-50% in water volume for the 1st layer, 35-45% for the 2nd layer



25-35% in water volume



25-35% in water volume (airless spray gun)



4-4,5 m²/l with 2 layers



allow 1-2 hrs between layers

READY HUES						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.548 1010 white	14	3,79	53,06	0,89		
	io io wille	4	4,69	18,76	1,10	

COLOR RANGE

TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES COLOR PACKAGING [1] €/1 €/PACKAGING €/m ²					
0.548 1010 white	14	3,79	53,06	0,89	
	TO TO WITH	4	4,69	18,76	1,10



APPLICATION METHOD & SURFACE PREPARATION

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

THERMOIGLOO

s. 0.509

class A+ thermo-insulating anti-condensation, anti-mould paint

Odourless paint for interiors which lends an improved living comfort and thermal/acoustic insulation thanks to the particular boron siliceous insulating micro-particles.

The hot/humid air of interiors condensates with the cold walls painted with traditional emulsion paints creating the conditions for mould growth. Thermal insulation with **Thermoigloo** prevents condensation whilst allowing the wall to breathe. It is suitable for the treatment of particularly humid premises such as kitchens, bathrooms, laundries, indoor swimming pools etc.

TECHNICAL DATA SHEET n°175





10-15% in water volume







READY HUES									
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²				
0.509	1010 white	14	16,89	236,46	4,44				
0.507	1010 white	4	18,39	73,56	4,84				

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS & WIZARD]									
SERIES	SERIES COLOR PACKAGING [1] €/1 €/PACKAGING €/m ²								
0.509 1010 white	14	16,89	236,46	4,44					
0.307	1010 white	4	18,39	73,56	4,84				



APPLICATION METHOD & SURFACE PREPARATION						
Bare interior surface	Interiors painted with sound washable emulsion paints					
LITOSTUCCO s. 1.050 (only for imperfections)	LITOSTUCCO s. 1.050 (only for imperfections)					
ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)						
BIANCOFIX s. 0.079 (on dark surfaces)	ARDFIX s. 0.070					

A-B PAINT LAVABILE

s. 0.508

washable algae-mould resistant mural paint for interiors & exteriors

Paint based on synthetic copolymers in aqueous dispersion. It features a good water vapour permeability. It allows walls to breathe, inhibiting the formation of condensation, which is the main cause of mould. It also features a remar- kable hiding power, good brushability & flow. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).

TECHNICAL DATA SHEET n°60





50-55% in water volume for the 1st layer, 45-50% for the 2nd layer



40-45% in water volume



40-45% in water volume (airless spray gun)



6 m²/l with 2 layers



READY HUES SERIES COLOR PACKAGING [1] **€/PACKAGING** €/l €/m² 14 16,15 226,10 2,69 0.508 **1010** white 10 16,15 161,50 2,69 17,65 70,60 4 2,94

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA

	TINTING SYSTEMS [16 COLOURS & WIZARD]									
SERIES	SERIES COLOR PACKAGING [t] €/L €/PACKAGING €/m									
		14	16,15	226,10	2,69					
0.508	1010 white	10	16,15	161,50	2,69					
		4	17,65	70,60	2,94					



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

BIANCOFIX s. 0.079 (on dark surfaces)

A-B PAINT TRASPIRANTE s. 0.526

breathable mould resistant emulsion paint for interiors

It features good hiding power, optimum substrate adhesion, brushability & flow. Its ideal for environments with a high concentration of water vapour such as kitchens, bathrooms, greenhouses etc., as it boasts a remarkable breathability. Complies with UNI 15457 (anti-mould).

TECHNICAL DATA SHEET n°60/2





55-60% in water volume




) 50-55% in water volume



45-55% in water volume (airless spray gun)



5-5,5 m²/l with 2 layers



READY HUES SERIES COLOR PACKAGING [1] €/l **€/PACKAGING** €/m² 14 10,30 144,20 1,96 0.526 10,30 103,00 **1010** white 10 1,96 11,80 47,20 2,25 4

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA

	TINTING SYSTEMS [16 COLOURS & WIZARD]									
SERIES COLOR PACKAGING [L] €/L €/PACKAGING €/m										
	0.526 10		14	10,30	144,20	1,96				
		1010 white	10	10,30	103,00	1,96				
			4	11,80	47,20	2,25				



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

BIANCOFIX s. 0.079 (on dark surfaces)

CLEAN s. 0.522

anti-mould matt paint for interiors

Mural paint which features an optimum breathability, covering power & a broad-spectrum of action which protects the dry film against moulds. Its specific for interiors such as kitchens, bathrooms, cellars etc., where hygiene & protection against fungi & moulds is of utmost importance. Optimum substrate adhesion, good brushability and flow. Complies with UNI 15457 (anti-mould).

TECHNICAL DATA SHEET n°66





55-60% in water volume



50-55% in water volume




45-55% in water volume (airless spray gun)



5-5,5 m²/l with 2 layers



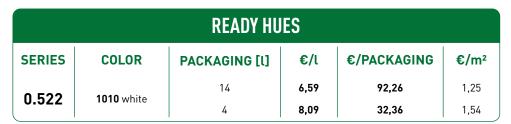

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA

	TINTING SYSTEMS [16 COLOURS & WIZARD]								
SERIES COLOR PACKAGING [1] €/1 €/PACKAGING €/m ²									
0.522 1010 white	14	6,59	92,26	1,25					
0.522	1010 White	4	8,09	32,36	1,54				



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Interior mural surface

LITOSTUCCO s. 1.050 (only for imperfections)

ARDFIX s. 0.070 or ISOLEX W s. 0.085 (in most cases)

BIANCOFIX s. 0.079 (on dark surfaces)

ARDSAN ADDITIVO PER INTERNO s. 0.914

mould resistant additive for emulsion paints

Concentrated solution of specific broad-spectrum chemical agents devised to be added to our traditional emulsion paints to inhibit the growth of mould & fungi.


The final finish preserves its original aspect impeding any health hazards due to the proliferation of

The final finish preserves its original aspect impeding any health hazards due to the proliferation of moulds. The such corrected emulsion paints are ideal for painting humid rooms such as kitchens, bathrooms & extremely cold walls or poorly aired premises.

Complies with UNI 15457:2008 (anti-mould) and UNI 15458 (anti-algae).

TECHNICAL DATA SHEET n°186





READY HUES										
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²				
0.914	0000 colourloss	1	6 pcs	63,05	63,05	N.D.				
0.714	0000 colourless	0,125	24 pcs	90,14	11,27	N.D.				

COLOR RANGE



Flyer SISTEMI ANTIMUFFA

APPLICATION METHOD & SURFACE PREPARATION

ARDSAN ADDITIVO PER ESTERNO s. 0.915

mould & algae resistant additive

Devised to be added to our varnishing products to prevent mould, fungi & algae from taking root. The final finish preserves its original aspect impeding any health hazards due to the proliferation of moulds. Products such corrected are ideal for painting external surfaces facing north where the rooting of fungi, moulds & algae is highly likely due to humidity. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).

TECHNICAL DATA SHEET n°188





1 bottle contains 4 doses. One dose additivates 14/16 litres of emulsion paint or 25 kg of thick coatings

READY HUES									
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²			
0.915	0000 colourless	1	6 pcs	84,38	84,38	N.D.			

COLOR RANGE



Flyer SISTEMI ANTIMUFFA

SPRAY SAN s. 0.911

mould killer

Concentrated solution containing specific broad-spectrum chemical agents which eradicate the anti aesthetic dark patches caused by moulds, fungi & algae on walls & grout. The product is ideal for cleaning and restoring interior/exterior surfaces. The "whitening" effect is visible within a short time after application. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).

TECHNICAL DATA SHEET n°184





READY HUES										
SERIES	COLOR	PACKA	€/l	€/PACKAGING	€/m²					
0.911	0000 colourless	4		25,66	102,64	N.D.				
0.711	dood colourtess	0,250	12 pcs	50,78	12,70	N.D.				

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA

APPLICATION METHOD & SURFACE PREPARATION

Mould infested surfaces

Don't scrape the mold

Apply SPRAY SAN s. 0.911 by wetting the surface thoroughly

Allow to dry perfectly & remove any residues by brushing. Apply a second treatment if the surface is badly damaged

Use only the AB-PAINT (mould resistant) line to finish

ARDSAN RISANANTE MURALE s. 0.916

Concentrated solution of specific broad-spectrum chemical agents which restore contaminated surfaces inhibiting the growth of biological pollutants such as moulds, algae, musk & lichens. The product is ready for use & is perfect for cleaning and restoring interior/exterior infested surfaces prior to treatment with mould &/or algae resistant paints. It can be applied to any type of mural surface or existing coats.

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).



TECHNICAL DATA SHEET n°185





	READY HUES									
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²				
0.916	0000 colourloss	4		12,59	50,36	N.D.				
0.710	0000 colourless	1	6 pcs	13,67	13,67	N.D.				

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA

APPLICATION METHOD & SURFACE PREPARATION

Mural surfaces

Apply ARDSAN with a brush; insisting on the contaminated areas

ARD FILL s. 0.553

acryl-siloxanic anti-algae filling finish

Special micro-coating which offers a remarkable filling & covering power, excellent resistance to alkali, extreme weather, atmospheric agents & optimum substrate adhesion.

It also offers a notable water vapour permeability, water repellence & low capillary water absorption. The use of **Siliard Primer** as an impregnating primer, improves water absorption. It is an innovative technology finish, gifted of optimal flow high resistance to scrub and wash, a low dirt retention, qualities wich make this coating specific for the protection and decoration of new buildings or for restoration or refurbishing of existing ones.

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).

ARD FILL ANTIMUFFA /ANTIALGA TO D. R.




TECHNICAL DATA SHEET n°97



30% in water volume for the 1st layer, 25% for the 2nd layer



15% in water volume (woolen or synthetic roller)





READY HUES										
SERIES	COLOR	PACKAG	GING [l]	€/l	€/PACKAGING	€/m²				
		14		15,26	213,64	3,39				
0.553	1010 white	4		16,76	67,04	3,72				
		1	6 pcs	19,01	19,01	4,22				

COLOR RANGE





Flyer ANTIMUFFA E ANTIALGA

Showcard PRODOTTI A SPESSORE

	TINTING SYSTEMS [16 COLOURS & WIZARD]										
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²					
				15,26	213,64	3,39					
	1010 white	4		16,76	67,04	3,72					
		1	6 pcs	19,01	19,01	4,22					
		12,880		13,89	178,90	3,09					
0.553	1022 medium white	3,680		15,25	56,12	3,38					
		0,920	6 pcs	17,30	15,92	3,84					
		12,130		10,99	133,31	2,44					
	1023 neutral white	3,470		12,07	41,88	2,68					
		0,870	6 pcs	13,69	11,91	3,04					

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Bare mural surfaces

Unsound paintwork

Mortar ARDPLAN AS/BS s. 1.962
(only for imperfections)

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or SILIARD
PRIMER s. 0.082 or PRIMER RIEMPITIVO COPRENTE s. 0.075

ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075 or RASANTE A PENNELLO s. 0.084 or RASARD s. 0.083

QUARZ PAINT ACRILICO s. 0.550

quartz fine anti-algae acrylic emulsion paint


The acrylic resin used as a binder lends an excellent resistance to alkali & atmospheric agents together with a remarkable adherence. It features an optimum filling power & matt aspect, the silicon fillers impede cracking, scaling and favour breathability. These remarkable properties together with the optimum covering power, brushability, scrubbing & wash resistance make this finishing product specific for the protection & decoration of new buildings & refurbishing. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).


OUARZ PAINT ACRILICO ANTIMUFFA /ANTIALGA

TECHNICAL DATA SHEET n°73



30% in water volume for the 1st layer, 25% for the 2nd layer







READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
		14		12,25	171,50	2,72
0.550	1010 white	4		13,75	55,00	3,05
		1	6 pcs	16,00	16,00	3,55

COLOR RANGE





Flyer ANTIMUFFA

Showcard PRODOTTI A SPESSORE

	TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
		14		12,25	171,50	2,72
	1010 white	4		13,75	55,00	3,05
0.550		1	6 pcs	16,00	16,00	3,55
0.550		12,130		8,82	106,99	1,96
	1023 neutral white	3,470		9,90	34,35	2,20
		0,870	6 pcs	11,52	10,02	2,56

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Bare mural surfaces

Unsound paintwork

Mortar ARDPLAN AS/BS s. 1.962
(only for imperfections)

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or SILIARD
PRIMER s. 0.082 or PRIMER RIEMPITIVO COPRENTE s. 0.075

BOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075 or RASANTE A PENNELLO s. 0.084 or RASARD s. 0.083

PAINTGUM 7 FONDO COPRENTE s. 0.584

QUARZO ANTICO AA s. 0.607

anti-algae quarz emulsion paint

Emulsion paint for exteriors. The particular resins lend an optimum resistance to alkali & atmospheric agents, excellent application & adherence. The light fast pigments also guarantee unalterable hues even on walls exposed to strong radiation & extreme weather. Thanks to the filling power of the "quartz", **Quarzo Antico AA** evens small irregularities and is therefore ideal for agglomerates composed of two coat plaster work or cement mortar renders. The AA version contains specific broad-spectrum biocides which lend an effective protection against the proliferation of algae, fungi & molds on the dry film applied to the wall.




TECHNICAL DATA SHEET n°179



30% in water volume for the 1st layer, 25% for the 2nd layer





(Q)	allow 3 hrs between layers

READY HUES						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.607 1010 white	14	9,96	139,44	2,49		
	IUIU White	4	11,46	45,84	2,86	

COLOR RANGE





Showcard PRODOTTI

I Flyer SISTEMI ANTIMUFFA E ANTIALGA

	TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²		
	1010 white	14	9,96	139,44	2,49		
0 407		4	11,46	45,84	2,86		
0.607	12,880	7,17	92,35	1,79			
	1013 white gel	3,680	8,25	30,36	2,06		

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Bare mural surfaces

Unsound paintwork

Mortar ARDPLAN AS/BS s. 1.962
[only for imperfections]

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or
PRIMER RIEMPITIVO COPRENTE s. 0.075

ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075 or RASANTE A PENNELLO s. 0.084 or RASARD s. 0.083

QUARZO ANTICO s. 0.608

quarz emulsion paint


Emulsion paint for exteriors. The particular resins lend an optimum resistance to alkali & atmospheric agents, excellent application & adherence. The light fast pigments also guarantee unalterable hues even on walls exposed to strong radiation & extreme weather. Thanks to the filling power of the "quartz", **Quarzo Antico** evens small irregularities and is therefore ideal for agglomerates composed of two coat plaster work or cement mortar renders.


TECHNICAL DATA SHEET n°85





30% in in water volume for the 1st layer, 25% for the 2nd layer







READY HUES						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
		14		9,36	131,04	2,34
0.608	1010 white	4		10,86	43,44	2,71
		1	6 pcs	13,11	13,11	3,27

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [16 COLOURS & WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
		14		9,36	131,04	2,34
	1010 white	4		10,86	43,44	2,71
0 400		1	6 pcs	13,11	13,11	3,27
0.000	0.608 1013 white gel	12,880		6,74	86,81	1,68
		3,680		7,82	28,78	1,95
		0,920	6 pcs	9,44	8,68	2,36

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Bare mural surfaces

Unsound paintwork

Mortar ARDPLAN AS/BS s. 1.962
[only for imperfections]

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or
PRIMER RIEMPITIVO COPRENTE s. 0.075

PRIMER RIEMPITIVO COPRENTE s. 0.075

DANNOUND RESOLUTION OF SOLEX S. 0.083

QUARZO MODERNO s. 0.551

quarz filler latex paint


Emulsion paint for exteriors. The particular resins employed lend an optimum "whiteness", covering power, water repellence, service life, resistance to alkali/atmospheric agents together with an excellent applicability, workability & adherence. Thanks to the filling power of the "quartz", this product evens small irregularities and is therefore ideal for agglomerates in two coat plaster work & lime cement mortar.


TECHNICAL DATA SHEET n°92






30% in water volume for the 1st layer, 25% for the 2nd layer







READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.551 1010 white	14	7,10	99,40	1,77	
	4	8,60	34,40	2,15	

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.551	1010 white	14	7,10	99,40	1,77
	1010 white	4	8,60	34,40	2,15

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Bare mural surfaces

Unsound paintwork

Mortar ARDPLAN AS/BS s. 1.962
(only for imperfections)

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085
or PRIMER RIEMPITIVO COPRENTE s. 0.075

ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075 or RASANTE A PENNELLO s. 0.084 or RASARD s. 0.083

QUARZO XL s. 0.604

excellent filling acrylic latex paint


Quartz emulsion paint for exteriors. The particular resins employed lend an optimum resistance to alkali and atmospheric agents, excellent application/workability, remarkable adherence, substrate adhesion & meteoric water resistance. It "hides" minor irregularities, thanks to the filling power of the "quartz", and is therefore ideal for agglomerates composed of two coat layer plastering or cement mortar equivalents.

ourio x

TECHNICAL DATA SHEET n°153



5-10% in water volume







READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.604	1010 white	14	9,55	133,70	3,82

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.604	1010 white	14	9,55	133,70	3,82

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION				
Bare mural surfaces	Unsound paintwork			
Mortar ARDPLAN AS/BS s. 1.962 (only for imperfections)	Treat mould with ARDSAN RISANANTE MURALE s. 0.916			
ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER	Mortar ARDPLAN AS/BS s. 1.962 (only for imperfections)			
RIEMPITIVO COPRENTE s. 0.075 or RASANTE A PENNELLO s. 0.084 or RASARD s. 0.083 or PG7 FILL s. 0.585	ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075 or RASANTE A PENNELLO s. 0.084 or RASARD s. 0.083 or PG7 FILL s. 0.585 (on dark/uneven colored surfaces)			

REBUILD INTONACLIMA

s. 1.624

elastomeric acryl-siloxane algae resistant lightweight coating with a 1,5 mm granulometry

A cutting-edge lightweight coating for external walls. It contains special microspheres in total recycled glass, created from selected pieces of glass no usable anymore to manufacture new bottles and glasses. Reduced weight up to 25% on the wall compared to a normal primer of same granulometry, with great elastomeric features (A2 class for UNI 1062-7), resistant to molds and algae according to UNI EN 15457 and UNI EN 15458, **Rebuild Intonaclima L** results ideal for restoration works on old ETICS coats too. It features HALS technology (Hindered Amine Light Stabilizer) against the demage by UV rays and weather extremes. The product has a great adherence, an high hiding power of the support and a good shock resistance. The Rebuild Fondo L + Rebuild Intonaclima L system represents a cutting edge and sustainable repair cycle on old damaged ETICS systems.

ANTIMUFFA /ANTIALGA

TECHNICAL DATA SHEET n°222





READY HUES						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.624	1010 white	20	5,52	110,40	12,55	
	1010 winte	2,5	6,72	16,80	15,27	

COLOR RANGE





SYSTEM SOLUTION

Flyer SISTEMI ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS]						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.624	1010 white	20	5,52	110,40	12,55	
	1010 white	2,5	6,72	16,80	15,27	
	1013 white gel	19,2	5,02	96,38	11,41	
	1013 Willte get	2,4	6,11	14,66	13,89	



	APPLICATION METHOD & SURFACE PREPARATION						
Walls with damaged ETICS	Bare mural surfaces	Mural surfaces already painted and partially degraded	Surfaces with unsound plastic coatings or embossed plaster a little bit unsound	Surfaces finished with limited coverage paints			
	ISOLEX s. 0.081 or ISOLEX W s. 0.085	Remove the efflorescences if present					
Verify the old ETICS was adherent to the wall	Mortar ARDPLAN AS/BS s. 1.962 (only for imperfections)	Treat mould with ARDSAN R	RASANTE A PENNELLO				
Apply two layers of REBUILD FONDO s. 0.614 putting inside the first the 150 qr/mg Ardcoat	RASANTE A PENNELLO s. 0.084	ISOLEX s. 0.081.or ISOLEX W s. 0.085	ISOLEX s. 0.081 or	s. 0.084 (in a similar or identical color to the finish)			
fiberglass mesh, according to the instructions reported in the technical data sheet	(in case of particularly smooth or poorly absorbent surfaces)	Mortar ARDPLAN AS/BS s. 1.962 (only for imperfections)	ISOLEX W s. 0.085				

INTONACLIMA 0,5 - 1 - 1,2 - 1,5 mm s. 1.623 - 1.638 - 1.635 - 1.630

algae resistant acryl-siloxane fiber-reinforced rustic coating

Coating for exteriors which lends a remarkable resistance to atmospheric agents & alkali, optimum adherence, applicability, working & low dirt pick-up. The light-fast pigments guarantee a good colour retention even on walls exposed to radiation & weather extremes.

The contained fibers grant product a special mechanical reinforcement. It is ideal for the for the protection of urban buildings in two coat plaster work, cement mortar renders (whether or not finished), gypsum plaster for interiors & smooth compact prefabricated concrete structures. With a granulometry above 1 mm is particularly suitable for the finishing of ETICS. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-al UNI EN 15824 certification label.

TECHNICAL DATA SHEET n°90-79-78-89





0,5 mm: approx. 0,5 m 2 /kg with 2 layers 1 mm: approx. 0,55 m 2 /kg

1,2 mm: approx. 0,45 m²/kg 1,5 mm: approx. 0,36 m²/kg CAM ANTIMUFFA /ANTIALGA

CAM compliance available in the 1,2 and 1,5 mm granulometries

READY HUES SERIES COLOR PACKAGING [kg] €/kg **€/PACKAGING** €/m² 25 5,22 130,50 9,49 1.638 **1010** white 1 mm 2,5 6,42 16,05 11.67 1.635 1010 white 25 5.22 130.50 11.60 1,2 mm 1.630 **1010** white 130,50 25 5,22 14.50 1.5 mm

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE



Flyer ARDCOAT SYSTEM

TINTING SYSTEMS [16 COLOURS & WIZARD]

SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.623 0,5 mm	1013 white gel (only 16 Colours)	23,5	4,64	109,04	9,28
	4040 117	25	5,22	130,50	9,49
1.638	1010 white	2,5	6,42	16,05	11,67
1 mm	4040 1:1	24	4,75	114,00	8,64
	1013 white gel	2,4	5,84	14,02	10,62
1.635	1010 white	25	5,22	130,50	11,60
1,2 mm	1013 white gel	24	4,75	114,00	10,55
1.630	1010 white	25	5,22	130,50	14,50
1,5 mm	1013 white gel	24	4,75	114,00	12,86

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck TINTE D'ITALIA*

*1.623 it is not formulated in Tinte D'Italia, colors available on request

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surface

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075

Imperfections	Particularly smooth surfaces and/or with low absorption	Hues with a poor covering power
Mortar ARDPLAN AS/BS s. 1.962	RASANTE A PENNELLO s. 0.084	PRIMER RIEMPITIVO COPRENTE s. 0.075 (refear to the formulary)

Available in 2 mm (2000 kg minimum order quantity/multiples)

SPACHTEL RUSTICO 1 - 1,2 - 1,5 mm


s. 1.632 - 1.637 - 1.639

acrylic plaster

Fibre-reinforced plastic rustic like coating for interiors & exteriors. The product lends an optimum resistance to alkali & atmospheric agents, remarkable elasticity & adherence, low dirt pick-up, excellent application & workability. The use of lightfast pigments (UV rays) & alkali guarantee the solidity of the colours even on walls exposed to strong sunlight & weather extremes. It is suitable for the protection of urban buildings in two coat plaster work, cement mortar renders, gypsum plaster for interiors & smooth compact prefabricated concrete structures. UNI EN 15824 certification label.



TECHNICAL DATA SHEET n°76-82-77





READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.632	1010 white	25	4,26	106,50	7,74
1 mm		2,5	5,46	13,65	9,92
1.637	4040 13	25	4,26	106,50	9,46
1,2 mm 1010 white		2,5	5,46	13,65	12,13
1.639 1,5 mm	1010 white	25	4,26	106,50	11,83

COLOR RANGE





Flyer ARDCOAT SYSTEM

Showcard PRODOTTI A SPESSORE

	TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
	1010 white	25	4,26	106,50	7,74	
1.632		2,5	5,46	13,65	9,92	
1 mm	1013 white gel	24	3,83	91,92	6,96	
		2,4	4,91	11,78	8,93	
	1010 white	25	4,26	106,50	9,46	
1.637	1010 Winte	2,5	5,46	13,65	12,13	
1,2 mm	1013 white gel	24	3,83	91,92	8,51	
		2,4	4,91	11,78	10,91	
1.639 1,5 mm	1010 white	25	4,26	106,50	11,83	
	1013 white gel	24	3,83	91,92	10,64	

Available in 2 mm (2000 kg minimum order quantity/multiples)

Only with **Wizard** colors available on request

Only with 16 Colours



Fan-deck TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surface

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075


Imperfections	Particularly smooth surfaces and/or with low absorption	Hues with a poor covering power
Mortar ARDPLAN AS/BS s. 1.962	RASANTE A PENNELLO s. 0.084	PRIMER RIEMPITIVO COPRENTE s. 0.075 (refear to the formulary)

LITOFLEX ACRILICO 1,8 mm s. 1.631

scratch effect plaster coating

Coating for interior & exterior walls. The acrylic binder lends an optimum resistance to alkali & atmospheric agents, remarkable elasticity and adherence, low dirt pick-up, excellent application & workability. The use of lightfast pigments (UV rays) & alkali guarantee the solidity of the colours even on walls exposed to strong sunlight & weather extremes. It is ideal for the protection of urban buildings in two coat plaster work, cement mortar renders, gypsum plaster for interiors & compact prefabricated concrete structures.

TECHNICAL DATA SHEET n°83





READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.631	1010 white	25	4,36	109,00	13,21

COLOR RANGE



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES	COLOR	COLOR PACKAGING [kg] €/kg €/PACKAGING €/m²					
1.631	1010 white	25	4,36	109,00	13,21		
	1013 white gel	24	3,91	93,84	11,85		

colors available on request

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surface

ARDFIX s. 0.070 or ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PRIMER RIEMPITIVO COPRENTE s. 0.075

Imperfections	Hues with a poor covering power
Mortar ARDPLAN AS/BS s. 1.962	PRIMER RIEMPITIVO COPRENTE s. 0.075 (refear to the formulary)

BETON DECOR COPRENTE

s. 0.554

anti-carbonation hiding waterproofer anti-algae for exterior concrete

It proves suitable for protecting and decorating interior & exterior cement structures, such as concrete and asbestos cement. It impedes peeling, lends a low degree of water absorption together with a notable water- repellent effect. Consequently, it inhibits ingress on the surfaces exposed to water, thus avoiding the formation of efflorescence. **Beton Decor Coprente** features a powerful barrier against the passage of carbon dioxide & sulphur dioxide preventing the acidification of concrete, which causes reinforcement corrosion. When using "white" **Beton Decor Coprente**, we recommend applying three coats in order to guarantee an optimum coverage. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).



TECHNICAL DATA SHEET n°75



60-65% in water volume for the 1st layer, 50-55% for the 2nd layer



35-45% in water volume



35-45% in water volume (airless spray gun)



6-6,5 m²/l with 2 layers



READY HUES SERIES COLOR PACKAGING [I] **€/PACKAGING** €/l €/m² 1015 white 14 19,12 267,68 3,06 0.554 2260 custoza 4 20,62 82,48 3,30

COLOR RANGE





Showcard LINE.

Flyer SISTEMI ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS]						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
	1015 white	14	19,12	267,68	3,06	
0.554	1015 WIIIte	4	20,62	82,48	3,30	
0.554	1023 neutral white	11,500	13,38	153,87	2,14	
	1023 Heutrat White	3,280	14,43	47,33	2,31	



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surface

BOIACCA PASSIVANTE s. 1.960 (anti-corrosion on protruding bars)

ARDMALTA s. 1.966 (for restoration work)

BETON DECOR ELASTOMERICO

s. 0.579

anti-carbonation algae resistant protective filler for concrete

It proves suitable for protecting and decorating interior and exterior cement structures, such as concreteand asbestos cement. **Beton Decor Elastomerico** offers a remarkable long lasting barrier against acid gases, such as carbon dioxide, whilst preserving an open capillary passage for water vapour. The particular features of the elastomers offer a good chemical/mechanical resistance & an optimum elasticity even in low temperatures - excellent when treating hair-cracks. The constituents of **Beton Decor Elastomerico** have been selected to resist the strong alkalinity therefore impeding peeling whilst guaranteeing a lasting resistance to atmospheric agents. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae). UNI EN 15824 certification label.



TECHNICAL DATA SHEET n°305



5-10% in water volume



5-10% in water volume



approx. 2 m²/l with 2 layers

	allow at least 24 hrs petween layers
--	---

READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.579	1010 white	14	21,73	304,22	10,86

COLOR RANGE





Showcard LINEA

Flyer SISTEMI ANTIMUFFA E ANTIALGA

	TINTING SYSTEMS [16 COLOURS]						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²		
0.579	1010 white	14	21,73	304,22	10,86		
	1023 neutral white	13,200	19,73	260,44	9,86		



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surfaces with plaster or concrete	Mural surfaces with cracks
BOIACCA PASSIVANTE s. 1.960 (on reinforcement bars)	Widen to at least 1/2 cm using a flexible grinding wheel
ARDMALTA s. 1.966 (for structural repair works)	
ISOLEX s. 0.081 or ISOLEX W s. 0.085 or PAINTGUM 7 FONDO COPRENTE s. 0.584 (in case of particularly crumbling supports and on fibre cement)	ARDELAST STUCCO s. 1.056

BIO SILREST

s. 0.538

silicate based mineral paint for interiors

Finish with an optimum covering power devised for the painting of interior surfaces where an exceptional water vapour permeability and remarkable wash resistance are required. **Bio Silrest** is the ideal solution or the treatment of poorly aired & humid premises such as kitchens, canteens, food industries & populated environments [nurseries, schools, hospitals, gymnasiums, offices, meeting rooms etc]. Furthermore, its mineral nature inhibits mould/fungi growth. Another highly important feature is its antistatic power which helps keep he surface cleaner longer. Formulated in compliance with the VOB/C DIN 18363 2.4.6. Regulation. It is free of any solvents/hazardous volatile substances guaranteeing a healthy & comfortable living environment. **Bio Silrest** is perfectly in line with the new approach of Bio-architecture. It is free of any solvents/hazardous volatile substances guaranteeing a healthy & comfortable living environment. It is perfectly in line with the new approach of Bio-architecture.




TECHNICAL DATA SHEET n°140



25-30% in volume of ISOREST s. 0.076 (on absorbant substrate) or water depending on the medium



20-25% in volume of ISOREST s. 0.076 (on absorbant substrate)





SER

0.5

allow 12 hrs between layers

READY HUES						
SERIES	SERIES COLOR PACKAGING [1]			€/PACKAGING	€/m²	
0.538	1010 white	10	10,57	105,70	1,92	

COLOR RANGE



LÍNEA SILREST



ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS]							
RIES	IES COLOR PACKAGING [t] €/t €/PACKAGING €/m ²						
538	1010 white	10	10,57	105,70	1,92		



APPLICATION METHOD & SURFACE PREPARATION

In case of mould patches clean thoroughly and pretreat the surface with SPRAY SAN s. 0.911 & ARDSAN RISANANTE MURALE s. 0.916

Bare chalky surfaces

Surfaces with old lime/distemper paintwork

ISOREST s. 0.076 diluite 100-200% in water volume

Remove any unsound paintwork & clean thoroughly

Do not apply directly on plaster of Paris substrates. This combination (mineral paints & plaster of Paris) produces an abnormal response

SILREST s. 0.559

silicate based paint for exteriors

A paint based on potassium silicate in aqueous solution, formulated in compliance with the VOB/C DIN 18363 2.4.6. regulation. After application the soluble silicates react with the carbon dioxide in the air originating colloidal silex hydrate which offers remarkable fixative powers. The silex, reacts with the plaster's calcium salts producing silicate calcium.
The film free mineral nature offers good breathability & excellent bond on lime, cement mortar

renders & civil plastering without flaking or detachment.

Silrest is not thermoplastic so a low-dirt pick is guaranteed together with a mould and bacterial resistance thanks to its inorganic nature. Silrest features specific siloxanic addititives resulting in a hydrophobic product which repels rain water whilst offering an optimum water vapour permeability. These features in symbiosis with the aesthetical appealing effects offer an optimum product for the refurbishing of listed buildings & buildings of architectural interest.

TECHNICAL DATA SHEET n°151



60-70% for the 1st layer, 30-40% for the 2nd laver in volume of ISOREST s. 0.076



20-30% in volume of ISOREST s. 0.076



approx. 4 m²/l with 2 layers



allow 24 hrs between layers



COLOR RANGE





Flyer LÍNEA SILREST

Flyer SISTEMI ANTIMUFFA E ANTIALGA

	TINTING SYSTEMS [16 COLOURS]						
SERIES	COLOR	PACKAGING [l]	€/PACKAGING	€/m²			
0.559	1022 medium white	15,040	16,76	252,07 4,19			
	1023 neutral white	14,080	14,66	206,41	3,66		

colors available on request

APPLICATION METHOD & SURFACE PREPARATION							
Bare chalk free surfaces	Chalky surfaces	Surfaces with old lime paintwork	Surfaces painted with emulsion paints, non mineral paints & textured coatings	Surfaces exposed to extreme rainfall			
Use the product thinned at 60-70% in volume of ISOREST s. 0.076 for the first layer, thinned at 30-40% for the second	ISOREST s. 0.076 thinned at 100-200% in water volume	Remove any unsound paintwork & clean thoroughly	SILREST INTERMEDIO s. 0.095	SILIARD PRIMER s. 0.082 water repellent siloxanic consolidating impregnator			

SILREST FILL

s. 0.569

silicate filler paint

Paint based on potassium silicate in aqueous solution formulated in compliance with the VOB/C DIN 18363 2.4.6. Regulation. After application the soluble silicates react with the carbon dioxide in the air originating colloidal silex hydrate which has remarkable fixative powers. The silex, reacts with the plaster's calcium salts producing silicate calcium. The film free mineral nature offers optimum breathability & an excellent bond on lime plaster, cement mortar renders & civil plastering without flaking or detachment. Silrest Fill is not thermoplastic so a low-dirt pick up is guaranteed together with a mould and bacterial resistance thanks to its inorganic nature. A particular blend of inert fillers confer an optimum filling power which level rough surfaces without altering the hygrothermal balance. With its aesthetically appealing effects it makes an optimum product for the refurbishing of listed buildings & buildings of architectural interest.



TECHNICAL DATA SHEET n°150



60-70% for the 1st layer, 30-40% for the 2nd layer in volume of ISOREST s. 0.076



20-25% in volume of ISOREST s. 0.076



approx. 3,8 m²/l with 2 layers



allow 24 hrs between layers

READY HUES						
SERIES	SERIES COLOR PACKAGING [1]		€/l	€/PACKAGING	€/m²	
0.569	1010 white	16	15,65	250,40	4,12	

COLOR RANGE





Flyer Flyer SISTEMI LINEA SILREST ANTIMUFFA E ANTIALGA

	TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKA	PACKAGING [t] €/t €/PACKAGING €/m			
1022	1022 modium white	15,2		13,77	209,30	3,62
0.569	1022 medium white	0,950	6 pcs	17,07	16,22	4,49
0.367	1023 neutral white	14,720		12,05	177,38	3,17
	1023 Heatrat White	0,920	6 pcs	14,94	13,74	3,93



APPLICATION METHOD & SURFACE PREPARATION							
Bare chalk free surfaces Chalky surfaces Surfaces with old lim		Surfaces with old lime paintwork	Surfaces painted with emulsion paints, non mineral paints & textured coatings	Surfaces exposed to extreme rainfall			
Use the product thinned at 60-70% in volume of ISOREST s. 0.076 for the first layer, thinned at 30-40% for the second	ISOREST s. 0.076 thinned at 100-200% in water volume	Remove any unsound paintwork & clean thoroughly	SILREST INTERMEDIO s. 0.095	SILIARD PRIMER s. 0.082 water repellent siloxanic consolidating impregnator			

SILREST INTERMEDIO s. 0.095

bonding primer

Specific primer based on potassium silicate and inerts with a selected granulometry. It is ideal for smoothing external surfaces to be finished with the Silrest line of mineral products. The exceptional filling power uniforms the irregularities found during restoration works. The remarkable vapour permeability makes it the perfect product when treating dehumidifying plasters which can be recoated with different finishes such as the **Siliard line** of products. It is also suitable for uniforming & filling substrates with crazes &/or patches of different granulometry. The optimum adhesion is perfect for treating old organic paintwork ("cost saving" as the removal of old synthetic paintwork is not necessary). It creates a bonding bridge between the substrate and the silicate paint preserving an open capillary network which is essential for the passage of water vapour.



TECHNICAL DATA SHEET n°271



10-15% in volume of ISOREST s. 0.076



10-15% in volume of ISOREST s. 0.076



approx. 2,6-3,9 m²/l with 1 layer



recoatable after 24 hrs

READY HUES						
SERIES	ERIES COLOR PACKAGING [1]		€/l	€/PACKAGING	€/m²	
0.095	1010 white	15	13,07	196,05	4,36	

COLOR RANGE



TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.095	1010 white	15	13,07	196,05	4,36

4202	4208	3303	5223	8287		
Hugg realizable for EVTEDIOD						
Hues rea	Hues realizable for EXTERIOR					

APPLICATION METHOD & SURFACE PREPARATION

Bare interior surfaces

ISOREST s. 0.076 thinned at 100-200% in water volume

Mortar ARDPLAN AS/BS s. 1.962 (only for imperfections)


SILREST INTONACHINO 0,5 - 1 - 1,2 mm


s. 1.622 - 1.627 - 1.629

silicate mineral plaster

Coating based on potassium silicate in aqueous solution, formulated in compliance with the Regulation VOB/C DIN 18363 2.4.6. After application the soluble silicates react with the carbon dioxide in the air originating colloidal silex hydrate which offers remarkable fixative powers. The silex, reacts with the plaster's calcium salts producing silicate calcium. The film free mineral nature offers optimum breathability and an excellent bond on lime plaster, cement mortar renders & civil plastering without flaking or detachment. It is not thermoplastic so a low-dirt pick up is guaranteed together with a mould and bacterial resistance thanks to its inorganic nature. It is a fibre reinforced coating which features an outstanding mechanical resistance in comparison to traditional silicate coatings. UNI EN 15824 certification label.

TECHNICAL DATA SHEET n°452-152-451





	READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.622	1010h ita	25	7,24	181,00	9,05	
0,5 mm	1010 white	2,5	8,44	21,10	10,55	
1.627	1010 white	25	6,31	157,75	12,62	
1 mm	1010 white	2,5	7,51	18,78	15,02	
1.629 1,2 mm	1010 white	25	6,31	157,75	15,77	

COLOR RANGE



SISTEMI ANTIMUFFA E ANTIALGA



Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE



LINEA SILREST

TINTING SYSTEMS [16 COLOURS & WIZARD]

SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
	1010 white	25	7,24	181,00	9,05
1.622	TOTO White	2,5	8,44	21,10	10,55
0,5 mm	1012bita mal	23,3	6,59	153,55	8,24
	1013 white gel	2,33	7,68	17,89	9,60
	1010 white	25	6,31	157,75	12,62
1.627		2,5	7,51	18,78	15,02
1 mm	1013 white gel	24	5,74	137,76	11,48
	1013 white get	2,4	6,83	16,39	13,66
1.629	1010 white	25	6,31	157,75	15,77
1,2 mm	1013 white gel	24	5,74	137,76	14,35

colors available on request

Available in 2 mm (2000 kg minimum order quantity/multiples)

Bare mural surfaces

in water volume

APPLICATION METHOD & SURFACE PREPARATION Surfaces painted with emulsion paints, Surfaces with old lime paintwork non mineral paints & textured coatings ISOREST s. 0.076 thinned 100-200% Remove any unsound paintwork Use the most appropriate method (sanding, & clean thoroughly scraping etc.) to remove any old paintwork

SILIARD PAINT s. 0.516

siloxanic algae resistant exterior paint

Paint formulated using nanoparticles & siliceous binders in aqueous dispersion. These features lend a remarkable water vapour permeability, water-repellence & low water absorption. It does not "film", it produces a porous/ transpiring matt coat which adheres perfectly to both mineral substrates & old mineral/synthetic paintwork. It offers an outstanding resistance to weather extremes, low dirt pick-up & inhibits formation of micro-organisms such as mould & algae. It is perfect for the protection & decoration of listed buildings, external plaster, breathable restoration plaster & porous materials in general, which require high protection and very low resistance to vapour permeability.

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).



TECHNICAL DATA SHEET n°211



30-35% in water volume



25-30% in water volume (woolen or synthetic roller)



approx. 6 m²/l with 2 layers



allow 12 hrs between layers



COLOR RANGE





Flyer LINEA

Flyer ANTIMUFFA E ANTIALGA

PRODOTTI A

	TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
	1010 white	15	21,86	327,90	3,64	
0.516	1022 medium white	13,8	20,99	289,66	3,50	
	1023 neutral white	13	20,11	261,43	3,35	



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Treat moute with ARDSAN RISANANTE MORALE S. 0.916			
Bare mural surfaces	Chalky mural surfaces	Mural surfaces	
SILIARD PRIMER W s. 0.077 thinned at 50- 100% in water volume	SILIADD DRIMED c 0.082 roady to uso	Remove any unsound paintwork & clean thoroughly	
	SILIARD PRIMER s. 0.082 ready to use	SILIARD PRIMER s. 0.082 ready to use	

Surfaces with efflorescence or subject to rising damp must be restored before application in order to guarantee adherence

SILIARD FILL

s. 0.552

siloxanic algae resistant filling exterior paint

Paint formulated using nanoparticles & siliceous binders in aqueous dispersion. These features lend a remarkable water vapour permeability, water repellence & low water absorption. It does not "film", it produces a porous & breathable matt coat which adheres perfectly to both mineral substrates & old mineral/synthetic paintwork. It offers an outstanding resistance to weather extremes, low dirt pick-up & inhibits the formation of micro-organisms such as mould & algae. It is perfect for the protection & decoration of listed buildings, external plaster, transpiring restoration plaster & porous materials in general, which require high protection and very low resistance to vapour permeability. A particular blend of inert fillers confer an optimum filling power which level rough surfaces without altering the hygrothermal balance.

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).



TECHNICAL DATA SHEET n°212



20-25% in water volume



15-20% in water volume (woolen or synthetic roller)



approx. 5 m²/l with 2 layers



allow 12 hrs between layers

READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.552	1010 white	15	19,35	290,25	3,87

COLOR RANGE





Flyer LINEA

Flyer ANTIMUFFA E ANTIALGA

PRODOTTI A SPESSORE

	TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
	1010 white	15	19,35	290,25	3,87	
0.552	1022 medium white	13,8	18,58	256,40	3,72	
	1023 neutral white	13	17,80	231,40	3,56	



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

HEAL HIGHLI ARDSAN RISANANTE MORALE S. 0.710				
Bare mural surfaces	Chalky mural surfaces	Mural surfaces		
SILIARD PRIMER W s. 0.077 thinned at 50- 100% in water volume	CILIADD DDIMED a 0.002 madu ta usa	Remove any unsound paintwork & clean thoroughly		
	SILIARD PRIMER s. 0.082 ready to use	SILIARD PRIMER s. 0.082 ready to use		

Surfaces with efflorescence or subject to rising damp must be restored before application in order to guarantee adherence

SILIARD INTONACHINO 1 - 1,2 mm

s. 1.641 - 1.625


siloxanic algae resistant plaster

Formulated using nanoparticles & siliceous binders in aqueous dispersion, it lends a remarkable water vapour permeability, water-repellence & low water absorption. It produces a porous/ transpiring matt coat which adhe- res perfectly to both mineral substrates & old mineral/synthetic paintwork. It offers an outstanding resistance to weather extremes and low dirt pick-up. Perfect for the protection & decoration of listed buildings, external plaster, transpiring restoration plaster & porous materials in general, which require high protection and very low resistance to vapour

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae). UNI EN 15824 certification label.

ANTIMUFFA

TECHNICAL DATA SHEET n°214-216






READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.641 1 mm	1010 white	25	6,83	170,75	12,42
1.625 1,2 mm	1010 white	25	6,83	170,75	15,18

COLOR RANGE



TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.641	1010 white	25	6,83	170,75	12,42
1 mm	1023 neutral white	24	6,35	152,40	11,54
1.625	1010 white	25	6,83	170,75	15,18
1,2 mm	1023 neutral white	24	6,35	152,40	14,11

Available in 2 mm (2000 kg minimum order quantity/multiples)



APPLICATION METHOD & SURFACE PREPARATION

Troat mould with APDSAN PISANANTE MIIPALE & 0.914

Treat moutu with ANDSAN NISANANTE MONALE 5. 0.710				
Bare mural surfaces	Chalky mural surfaces	Mural surfaces		
SILIARD PRIMER W s. 0.077 thinned at 50- 100% in water volume	CILIADD DDIMED a 0.002 madu ta usa	Remove any unsound paintwork & clean thoroughly		
	SILIARD PRIMER s. 0.082 ready to use	SILIARD PRIMER s. 0.082 ready to use		

Surfaces with efflorescence or subject to rising damp must be restored before application in order to guarantee adherence

ARDELAST GRANA FINE

s. 0.568

algae resistant acryl-siloxane elastomeric finish

Thanks to a remarkable elasticity - even at low temperatures - it is specific for the restoration of cracked walls. Optimum filling/covering power, alkaline inertia, adhesion (on clean & dry surfaces) & low dirt pick-up due to a self-reticulating substance which reacts under sunlight increasing surface hardness without reducing the film's elasticity.

It offers an excellent resistance to atmospheric agents, low water absorption, good water vapour permeability & carbon dioxide impermeability.

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).


TECHNICAL DATA SHEET n°104





5-10% in water volume







READY HUES					
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²
0.568	1010 white	15	20,92	313,80	10,46

COLOR RANGE



	TINTING SYSTEMS [16 COLOURS]						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²		
1010 white	15	20,92	313,80	10,46			
0.568	1023 neutral white	14,1	17,99	253,66	8,99		



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surfaces

ISOLEX s. 0.081, ISOLEX W s. 0.085 or PAINTGUM 7 FILL s. 0.585

From 0,3 to 1-1,2 mm open cracks

Widen to at least 1 cm

ISOLEX s. 0.081 or ISOLEX W s. 0.085 (in cracks)

Seal with ARDELAST STUCCO s. 1.056


ARDELAST QUARZO s. 0.563

algae resistant acryl-siloxane quartz elastomeric paint

Thanks to a remarkable elasticity - even at low temperatures - it is specific for the restoration of cracked walls. It features optimum filling/covering power, alkaline inertia, adhesion (on clean & dry surfaces) & low dirt pickup due to a self-reticulating substance which reacts under sunlight increasing surface hardness without reducing the film's elasticity. It offers an excellent resistance to atmospheric agents, low water absorption, good water vapour permeability & carbon dioxide impermeability.

Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).

TECHNICAL DATA SHEET n°101







READY HUES SERIES COLOR PACKAGING [I] €/l **€/PACKAGING** €/m² 15 21,57 323,55 6,54 0.563 **1010** white 1 6 pcs 27,17 27,17 8,23

COLOR RANGE





Flyer LINEA ARDELAST

Flyer SISTEMI ANTIMUFFA E ANTIALGA

ANTIMUFFA /ANTIALGA

	TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
4040 13	15		21,57	323,55	6,54	
0.563	1010 white	1	6 pcs	27,17	27,17	8,23
1013 white gel	13,5		18,55	250,43	5,62	
	1013 winte get	0,9	6 pcs	23,37	21,03	7,08



APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surfaces

ISOLEX s. 0.081 or ISOLEX W s. 0.085

Cracks

Widen to at least 0,5 cm

Seal with ARDELAST STUCCO s. 1.056

ANTIMUFFA /ANTIALGA


ARDELAST INTONACHINO 1-1,2 mm s. 1.556 - 1.645

algae resistant acrylic-siloxane elastomeric filler coating

Thanks to a remarkable elasticity - even at low temperatures - it is specific for the restoration of cracked walls. It features optimum filling/ covering power, alkaline inertia, adhesion (on clean & dry surfaces) & low dirt pick-up due to a self-reticulating substance which reacts under sunlight increasing surface hardness without reducing the coating's elasticity. These particular properties make Ardelast Intonachino perfect for the finishing of ETICS. Complies with UNI 15457 (anti-mould) and UNI 15458 (anti-algae).

UNI EN 15824 certification label.

TECHNICAL DATA SHEET n°102-108





READY HUES SERIES COLOR PACKAGING [kg] **€/PACKAGING** €/kg €/m² 25 7,56 189,00 11,63 1.556 **1010** white 1 mm 2,5 8,76 21,90 13,48 7,56 189,00 25 15,12 1.645 1010 white 1,2 mm 8.76 21.90 2.5 17.52

COLOR RANGE



	TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
	1010 white	25	7,56	189,00	11,63	
1.556		2,5	8,76	21,90	13,48	
1 mm	1012 white and	24	6,96	167,04	10,71	
	1013 white gel	2,4	8,06	19,34	12,40	
	1010 white	25	7,56	189,00	15,12	
1.645		2,5	8,76	21,90	17,52	
1,2 mm	1013 white gel	24	6,96	167,04	13,92	
	iois writte get	2,4	8,06	19,34	16,12	

Available in 1,5 & 2 mm (2000 kg minimum order quantity/multiples)

Fan-deck TI<u>nte d'Itali</u>a 🐟 TINTE D'ITALIA

APPLICATION METHOD & SURFACE PREPARATION Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surfaces

ISOLEX s. 0.081. ISOLEX W s. 0.085 or PAINTGUM 7 FILL s. 0.585

From 0,3 to 1-1,2 mm open cracks

Widen to at least 1 cm

ISOLEX s. 0.081 or ISOLEX W s. 0.085 (in cracks)

Seal with ARDELAST STUCCO s. 1.056

Apply 2 layers of ARDELAST GRANA FINE s. 0.568 in the same colour will be used for the finishing on the sealed area


ARDELAST RASANTE s. 1.561

intermedio elastomerico per rasature armate


Elastomeric coating devised to conserve thermal insulation systems damaged by surface discontinuity. Fiber- glass reinforcement meshes are employed in order to create a specific reinforcement layer when finishing with the **Ardelast line** of products. This is a professional product which offers a remarkable elasticity -even at low temperatures- and guarantees high performing cycles when treating cracks & crazes on thermal insulation systems. It offers an excellent workability and a low volumetric decrease which makes it possible to uniform the susbtrate whilst "hiding" the embedded fiberglass mesh. Perfect for preventing & treating cracks on the most common wall surfaces (bare & painted). UNI EN 15824 certification label.



TECHNICAL DATA SHEET n°109







READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.561	1010 white	25	6,45	161,25	16,12

COLOR RANGE



Showcard LINEA ARDELAST

TINTING SYSTEMS [16 COLOURS]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.561	1010 white	25	6,45	161,25	16,12

4202	4208	3303	5223	8287		
4202	4208	3303	5223	8287		
Hues realizable for EXTERIOR						

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surfaces

ISOLEX s. 0.081 or ISOLEX W s. 0.085

Cracks

Widen to at least 0,5 cm

Seal with ARDELAST STUCCO s. 1.056

ARDELAST STUCCO

s. 1.056

elastomeric fibred stucco


Water-repellent spatula stucco based on elastomeric acrylic resins in aqueous dispersion. It provides a remar- kable elasticity even in low temperatures & reduced shrinkage once dry. It is suitable for the sealing of cracks (widened with a flexible grinder) on plaster, walls & concrete as well as the stuccoing of holes & imperfections on the substrate during an elastomeric cycle with **Ardelast**.


TECHNICAL DATA SHEET n°98





ready to use (steel or plastic float)





READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.056	1010 white	5	9,49	47,45	3,80

COLOR RANGE



Showcard LINEA ARDELAST

APPLICATION METHOD & SURFACE PREPARATION

Surfaces with moulds, moss or algae

ARDSAN RISANANTE MURALE s. 0.916

ISOLEX s. 0.081 or ISOLEX W s. 0.085

CREATIVE FONDO s. 0.073

uniforming primer for decorative products

It is a smooth pigmented primer based on copolymers in aqueous dispersion which make it the perfect top coat for the **Creative line** of decorative products. It offers an optimum bond to mineral surfaces & appealing aesthetics unrealizable with normal latex paints. Its brushability, covering & uniforming power are remarkable and it is also odourless.

TECHNICAL DATA SHEET n°134






20-30% in water volume







READY HUES SERIES COLOR PACKAGING [l] €/l **€/PACKAGING** €/m² 14 15,68 219,52 2,24 0.073 **1010** white 2,5 16,72 41,80 2,39 17,47 2,49 17,47 1 6 pcs

COLOR RANGE

TINTING SYSTEMS [WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
		14		15,68	219,52	2,24
0.073	1010 white	2,5		16,72	41,80	2,39
		1	6 pcs	17,47	17,47	2,49



APPLICATION METHOD & SURFACE PREPARATION					
Unsound surfaces Bare interior surfaces & distemper paintwork latex paintwork					
	Remove any fith and unsound part				
LITOSTUCCO s. 1.050 (for imperfections)	LITOSTUCCO s. 1.050 (for imperfections)				

ARDFIX s. 0.070 or ISOLEX W s. 0.085

ARD LIME

s. 1.558

lime putty based mineral paint for interiors & exteriors

Ard Lime is a mineral paint based on extremely fine seasoned lime putty, synthetic binders & natural inert fillers. It can be considered a "lime whitener" formulated with the most advanced technologies. It never chalks, is permeable to water vapour & offers a remarkable resistance to mould & bacteria. Ard Lime offers a matt finish, simple application, optimum breathability & a reasonable resistance to scouring. It is ideal for the interior/ exterior decoration of listed buildings & buildings of architectural interest. The use of lime based paints in not recommended in industrial environments or on surfaces exposed to extreme rain.



TECHNICAL DATA SHEET n°158



25-35% in weight of water



) 25-35% in weight of water



allow 3-4 hrs	s between layers
---------------	------------------

READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.558	1010 white	20	3,97	79,40	0,57
		4	5,47	21,88	0,78

COLOR RANGE



Flyer SISTEMI ANTIMUFFA E ANTIALGA

TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.558	1010 white	20	3,97	79,40	0,57
		4	5,47	21,88	0,78



APPLICATION METHOD & SURFACE PREPARATION

Bare mural surfaces

Brush & clean thoroughly

Wet the surface with water

CREATIVE ARD LIME R

s. 1.557

antique-effect glossy lime stucco


Natural stucco based on seasoned lime which offers an optimum gloss. It produces elegant and prestigious finishes resulting in delicate & cosy atmospheres. The flat-glossy contrast is similar to that found in the antique Venetian stuccoes inspired by antique mastery. Easy to apply and with an excellent water vapour permeability & good mould & bacteria resistance. It is ideal for traditional cement plaster cons quently, the decoration of interior mural surfaces, the restoration of listed buildings & buildings of architectural importance.

The use of lime-based paints is not recommended in industrial environments or on surfaces exposed to extreme rain.

TECHNICAL DATA SHEET n°159







READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.557	1010 white	24	4,12	98,88	2,06
		5	5,62	28,10	2,81

COLOR RANGE



Showcard CREATIVE ARD LIME

TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.557	1010 white	24	4,12	98,88	2,06
		5	5,62	28,10	2,81



Only with **Wizard** Showcard CREATIVE ARD LIME

Only with 16 Colours



Fan-deck 1001 COLORS "Neutri" section

APPLICATION METHOD & SURFACE PREPARATION

Ensure the substrate is clean, brushed & sound				
Bare mineral surfaces	Mineral surfaces with distemper paintwork	Mineral surfaces with washable paintwork		
	LITOSTUCCO s. 1.050 (only for imperfections)			
Maintain surfaces wet especially when the sub-base is particularly absorbent or exposed	ARDFIX s. 0.070 or ISOLEX W s. 0.085 (sand & seal the whole surface)	ARDFIX s. 0.070 or ISOLEX W s. 0.085 (sand & seal the stuccoed areas)		
to high temperatures	CREATIVE FONDO s. 0.073			
	CREATIVE ARD LIME R s. 1.557 (wet-on-wet application - video available)			

CREATIVE ARD LIME CARRARA s. 1.564

Carrara marble effect mineral coating

Decorative coating composed of mineral extenders & modified lime putty it let get a spatulated finish "carrara marble" effect. **Creative Ard Lime Carrara** let obtain prestigious finishes really solid and velvety matt, with a good water resistance and a great water vapour permeability. Ideal to be used on traditional plaster work and with a cement basis, it is specifically recommended for interior decoration of architectural buildings and for the restoration of historic centers.

TECHNICAL DATA SHEET n°205









READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.564 101	1010 white	25	4,92	123,00	4,92
	1010 white	5	5,92	29,60	5,92

COLOR RANGE



Showcard CREATIVE ARD LIME

TINTING SYSTEMS [WIZARD]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.564 1010 white	25	4,92	123,00	4,92	
	5	5,92	29,60	5,92	



Only with **Wizard** Showcard CREATIVE ARD LIME

Only with 16 Colours



Fan-deck 1001 COLORS "Neutri" section

APPLICATION METHOD & SURFACE PREPARATION

Ensure the substrate is clean, brushed & sound

	insure the substrate is clean, brusheu & Sound			
Bare mineral surfaces	Mineral surfaces with distemper paintwork	Mineral surfaces with washable paintwork		
Maintain surfaces wet especially when the sub-base is particularly absorbent or exposed to high temperatures	LITOSTUCCO s. 1.050 (only for imperfections)			
	ARDFIX s. 0.070 o ISOLEX W s. 0.085 (sand & seal the whole surface)	ARDFIX s. 0.070 or ISOLEX W s. 0.085 (sand & seal the stuccoed areas)		
	CREATIVE FONDO s. 0.073			
	CREATIVE ARD LIME RASATO s. 1.565 (wet-on-wet application - video available)			

CREATIVE ARD LIME RASATO s. 1.565

marmorino-effect mineral coating

Coating composed of mineral extenders & modified lime putty which offers a flat or semi-gloss finish according to the application technique. It is ideal as a marmorino effect protective finish for walls with two coat plaster work. Partial smoothing is possible using a stainless steel trowel, thus resulting in a very compact & pleasant coating featuring a good resistance to water & atmospheric agents, whilst preserving an outstanding water vapour permeability. It can be employed as a filling primer with a **Creative Ard Lime R** topcoat. The use of time-based paints is not recommended in industrial environments or on surfaces exposed to extreme rain.

TECHNICAL DATA SHEET n°156







READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.565 1010 white	1010	25	3,44	86,00	4,30
	TOTO White	5	4,94	24,70	6,17

COLOR RANGE



Showcard CREATIVE ARD LIME

TINTING SYSTEMS [16 COLOURS & WIZARD]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.565 1010 white	25	3,44	86,00	4,30	
	5	4,94	24,70	6,17	



Only with **Wizard** Showcard CREATIVE ARD LIME

Only with 16 Colours



Fan-deck 1001 COLORS "Neutri" section

APPLICATION METHOD & SURFACE PREPARATION

Ensure the substrate is clean, brushed & sound

Bare mineral surfaces	Mineral surfaces with distemper paintwork	Mineral surfaces with washable paintwork		
Maintain surfaces wet especially when the sub-base is particularly absorbent or exposed to high temperatures	LITOSTUCCO s. 1.050 (only for imperfections)			
	ARDFIX s. 0.070 o ISOLEX W s. 0.085 (sand & seal the whole surface)	ARDFIX s. 0.070 or ISOLEX W s. 0.085 (sand & seal the stuccoed areas)		
	CREATIVE FONDO s. 0.073			
	CREATIVE ARD LIME RASATO s. 1.565 (wet-on-wet application - video available)			

ARD LIME INTONACHINO 0,5 - 1 mm


s. 1.567 - 1.566


mineral lime putty based plaster

Finish formulated with mature lime putty with a plaster effect. It is suitable for old/new lime/cementitious plastering. It is recommended as a primer when using **Creative Ard Lime R** or **Creative Ard Lime Rasato** on uneven mineral surfaces. The inorganic composition makes it particularly suitable for the restoration of listed buildings. It lends perfect protection, filling & maximum vapour breathability.

TECHNICAL DATA SHEET n°146,157







READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.567 0,5 mm	1010 white	25	3,63	90,75	6,05
1.566	1010 white	25	3,06	76,50	6,12

COLOR RANGE





Flyer SISTEMI ANTIMUFFA E ANTIALGA

Showcard PRODOTTI DI PREPARAZIONE PER MURO E FINITURE A SPESSORE

	TINTING SYSTEMS [16 COLOURS]				
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.567 0,5 mm	1010 white	25	3,63	90,75	6,05
1.566	1010 white	25	3,06	76,50	6,12

colors available on request

APPLICATION METHOD & SURFACE PREPARATION

Bare mural surfaces

Brush & clean thoroughly

CREATIVE SETARD s. 0.725

water based luminescent silk decorative finish

Special decorative finish which offers an appealing iridescent, pearly silver or gold metallic aspect for interior design. It is recoatable with any of our latex paints, odourless, dust repellent, stays clean and guarantees maximum comfort and wellbeing just a few hours after application.

TECHNICAL DATA SHEET n°132















READY HUES SERIES COLOR €/PACKAGING €/m² PACKAGING [l] €/l 2,5 2 pcs 53,33 133,33 6,27 **0400** gold 1 6 pcs 55,33 55,33 6,51 0.725 53,33 133,33 2,5 6,27 2 pcs 0200 silver 55,33 55.33 6,51 1 6 pcs

COLOR RANGE



Showcard CREATIVE SETARD

TINTING SYSTEMS [WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
0/00 ~~14	2,5	2 pcs	53,33	133,33	6,27	
0.725	0400 gold	1	6 pcs	55,33	55,33	6,51
0.725	0.723 0200 silver	2,5	2 pcs	53,33	133,33	6,27
0200 si	UZUU Silver	1	6 pcs	55,33	55,33	6,51



Showcard CREATIVE SETARD

APPLICATION METHOD & SURFACE PREPARATION			
Bare wood or chipboard panels	Bare interior surface or painted with sound distemper		
LITOSTUCCO s. 1.065 (only for imperfections)	LITOSTUCCO s. 1.050		
ARDFIX s. 0.070 or ISOLEX W s. 0.085	(only for imperfections)		

CREATIVE FONDO s. 0.073 (same hue of the finish)

Surfaces with CREATIVE SETARD paintwork

CREATIVE SHINY DESIGN s. 0.715

water based sandy metallic decorative finish

Special paint for interiors with silver or gold sandy metallic effects devised for interior design. It is recoatable with any of our latex paints, odourless, dust repellent, stays clean and guarantees maximum comfort and well-being just a few hours after application; it does not yellow, it is dust repellent, surfaces stay clean longer and can be recoated with any ARD latex paint.

TECHNICAL DATA SHEET n°137





ready to use









READY HUES SERIES COLOR €/PACKAGING €/m² PACKAGING [l] €/l 2,5 2 pcs 53,33 133,33 6,27 **0400** gold 1 6 pcs 55,33 55,33 6,51 0.715 53,33 133,33 2,5 2 pcs 6,27 0200 silver 55,33 55.33 6,51 1 6 pcs

COLOR RANGE



Showcard CREATIVE SHINY DESIGN

TINTING SYSTEMS [WIZARD]						
SERIES	COLOR	PACKA	GING [l]	€/l	€/PACKAGING	€/m²
	0400 gold	2,5	2 pcs	53,33	133,33	6,27
0.715		1	6 pcs	55,33	55,33	6,51
0.715	0200 silver	2,5	2 pcs	53,33	133,33	6,27
		1	6 pcs	55,33	55,33	6,51



Showcard CREATIVE SHINY DESIGN

APPLICATION METHOD & SURFACE PREPARATION				
Bare wood or chipboard panels	Bare interior surface or painted with sound distemper			
LITOSTUCCO s. 1.065 (only for imperfections)	LITOSTUCCO s. 1.050			
ARDFIX s. 0.070 or ISOLEX W s. 0.085	(only for imperfections)			

CREATIVE FONDO s. 0.073 (same hue of the finish)

Surfaces with CREATIVE SHINY DESIGN paintwork

CREATIVE ARD SAND s. 0.710

water based sandy metallic decorative finish

Special paint for interiors with silver or gold sandy metallic effects devised for interior design. It is recoatable with any of our latex paints, odourless, dust repellent, stays clean and guarantees maximum comfort and well-being just a few hours after application; it does not yellow, it is dust repellent, surfaces stay clean longer and can be recoated with any ARD latex paint.

TECHNICAL DATA SHEET n°131





ready to use







READY HUES						
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
	0400 gold	2,5	2 pcs	42,28	105,70	4,97
0.710		1	6 pcs	44,28	44,28	5,21
0.710		2,5	2 pcs	42,28	105,70	4,97
		1	6 pcs	44,28	44,28	5,21

COLOR RANGE



Showcard CREATIVE ARD SAND

TINTING SYSTEMS [WIZARD]						
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
	0/00	2,5	2 pcs	42,28	105,70	4,97
0.710	0400 gold	1	6 pcs	44,28	44,28	5,21
0.710	0200 silver	2,5	2 pcs	42,28	105,70	4,97
	0200 silver	1	6 pcs	44,28	44,28	5,21



Showcard CREATIVE ARD SAND

APPLICATION METHOD & SURFACE PREPARATION					
Bare wood or chipboard panels	Bare interior surface or painted with sound distemper				
LITOSTUCCO s. 1.065 (only for imperfections)	LITOSTUCCO s. 1.050				
ARDFIX s. 0.070 or ISOLEX W s. 0.085	(only for imperfections)				

CREATIVE FONDO s. 0.073 (same hue of the finish)

Surfaces with CREATIVE ARD SAND paintwork

CREATIVE DESERT STONE s. 0.720

coarse sand effect decorative finish (water based)

Special paint for interiors with silver or gold sandy metallic effects. It is recoatable with any of our latex paints, odourless, dust repellent, stays clean and guarantees maximum comfort and wellbeing just a few hours after application; it can be recoated with any ARD latex paint.

TECHNICAL DATA SHEET n°138







READY HUES						
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
	0/00 ~ ald	2,5	2 pcs	50,90	127,25	5,99
	0400 gold	1	6 pcs	52,90	52,90	6,22
0.720	0.720 0200 silver 0010 white	2,5	2 pcs	50,90	127,25	5,99
0.720		1	6 pcs	52,90	52,90	6,22
		2,5	2 pcs	29,09	72,73	3,42
		1	6 pcs	31,09	31,09	3,66

COLOR RANGE



Showcard CREATIVE DESERT STONE

	TINTING SYSTEMS [WIZARD]					
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
	0/00 ~old	2,5	2 pcs	50,90	127,25	5,99
	0400 gold	1	6 pcs	52,90	52,90	6,22
0.720	0200 silver	2,5	2 pcs	50,90	127,25	5,99
0.720		1	6 pcs	52,90	52,90	6,22
		2,5	2 pcs	29,09	72,73	3,42
	oo io white	1	6 pcs	31,09	31,09	3,66



Showcard CREATIVE DESERT STONE

APPLICATION METHOD & SURFACE PREPARATION				
Bare wood or chipboard panels	Bare interior surface or painted with sound distemper			
LITOSTUCCO s. 1.065 (only for imperfections)	LITOSTUCCO s. 1.050			
ARDFIX s. 0.070 or ISOLEX W s. 0.085	(only for imperfections)			

CREATIVE FONDO s. 0.073 (same hue of the finish)

Surfaces with CREATIVE DESERT STONE paintwork

CREATIVE MORPHO s. 0.719

multipurpose metallized decorative velature


Water based decorative finish which offers a silver or gold opalescent pearly effect. It is ideal for interiors and velature (hazes) on exterior surfaces. It can be successfully employed to create an elegant antique effect on venetian stucchi as well as original modern solutions. **Morpho** has been devised to guarantee maximum comfort & livability just few hours after application. It is odourless, does not yellow, dust repellent & offers a remarkable water repellence. Surfaces stay clean longer & recoating is possible with any ARD latex paint.


MORPHO

TECHNICAL DATA SHEET n°161



50-100% in water volume for application on wall paints & coatings





READY HUES SERIES COLOR €/PACKAGING €/m² PACKAGING [l] €/l 2,5 2 pcs 26,66 66,65 2,67 **0400** gold 0,750 6 pcs 28,66 21,50 2,87 2,5 26,66 66,65 2 pcs 2,67 0.719 0200 silver 0,750 28,66 21,50 6 pcs 2,87 21,39 53,48 2,5 2,14 2 pcs 0000 trasparent 0.750 23.39 17.54 6 pcs 2.34

COLOR RANGE



Showcard CREATIVE MORPHO

TINTING SYSTEMS [WIZARD]						
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
	0/00 gold	2,5	2 pcs	26,66	66,65	2,67
	0400 gold	0,750	6 pcs	28,66	21,50	2,87
0.710	0.719 0200 silver 0000 trasparent	2,5	2 pcs	26,66	66,65	2,67
0.717		0,750	6 pcs	28,66	21,50	2,87
		2,5	2 pcs	21,39	53,48	2,14
		0,750	6 pcs	23,39	17,54	2,34



Showcard CREATIVE MORPHO

APPLICATION METHOD & SURFACE PREPARATION				
Surfaces with shiny lime putty like ARD LIME R s. 1.557				
Ensure the lime based product is at least 1 week old	The filler coat must be washable, perfectly adherent with a uniform aspect	Perfectly adherent filler coats & surfaces		
Appy CREATIVE MORPHO s. 0.719 thinned with 100% of water by sponge	CREATIVE ARDTEXTURE s. 1.709 (creating materic effect)	with homogeneous chromatic finishes		

CREATIVE ARDTEXTURE s. 1.709


decorative materic effect coating for interiors


Particular primer which is colourable, extremely versatile & easy to apply. It is based on Carrara marble and devised for the artistic personalization of interior walls. It is ideal for direct application on plaster, old enamel, paints & well anchored coatings. Although it offers a remarkable water vapour permeability it also guarantees a low liquid water absorption. This property enhances the decorative effects of the Creative line finishes.

TECHNICAL DATA SHEET n°165









READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.709 1010 white	24	6,01	144,24	4,29	
	1010 white	5	7,51	37,55	5,36

COLOR RANGE





CREATIVE ARD LIME CREATIVE MORPHO

	TINTING SYSTEMS [WIZARD]					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.709 1010 white	24	6,01	144,24	4,29		
	1010 winte	5	7,51	37,55	5,36	





CREATIVE ARD LIME CREATIVE MORPHO

APPLICATION METHOD & SURFACE PREPARATION Bare or distemper paint surfaces **Painted walls** ARDFIX s. 0.070 or ISOLEX W s. 0.085 Sand & ensure the surface is cleaned thoroughly & free of oil/grease

CREATIVE ARDRUST Base s. 0.741

oxidized rust effect decorative water based finish

Creative Ardrust is a water based decorative system that allows to reproduce the typical aspect of rusted iron surfaces due to the natural exposure to atmospheric agents.

Creative Ardrust is an effect realized with:

- -Creative Ardrust-Base s. 0.741: rust effect oxidisable decorative finish;
- -Creative Ardrust-Creator s. 0.743: oxidant solution.

TECHNICAL DATA SHEET n°163



20-30% in water volume



20-30% in water volume



approx. 6-7 m²/l



oxidizable after 12 hrs

READY HUES						
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
0.741	9400 iron base	1	6 pcs	29,53	29,53	4,54

COLOR RANGE



Showcard CREATIVE OXYDATE

APPLICATION METHOD & SURFACE PREPARATION				
Bare interior wall surfaces or already painted with tempera painting	Interior wall surfaces already painted with washable water paints			
Be sure the support has a 28 days seasoning at least	Clean the surface up, stucco any eventual imperfections, sand and dust			
Apply 2 layers, wet on wet, of neutralizer for wall surfaces PRIMER MURALE s. 0.074	ARDFIX s. 0.070 or ISOLEX W s. 0.085			

CREATIVE FONDO s. 0.073

CREATIVE ARDRUST Creator s. 0.743

oxidizing solution for Ardrust



SERIES

0.743

ready to use



sponge: 8-12 m²/l nebulyzer: 4-6 m²/l

COLOR

0000 colourless



ready to use



€/l

29,53

READY HUES

6 pcs

PACKAGING [I]

oxidizable again after 2 hrs

€/PACKAGING

29,53

€/m²

4,92

COLOR RANGE




Showcard CREATIVE OXYDATE

APPLICATION METHOD & SURFACE PREPARATION

Protect all the surfaces not interested in application: CREATIVE ARDRUST CREATOR s. 0.743 can provoke metal surface oxidation and anti aesthetical spotting on stone surfaces (for example marbles) if gets accidently in touch with them

At finished work, immediately remove eventual masking tapes and clean equipment with plenty of water.

Once oxidation is complete, protect the surface with ISOLEX W s. 0.085 diluted 1:4



CREATIVE ARDCOPPER Base s. 0.742

oxidized copper effect decorative water based finish

Creative Ardcopper is a decorative water based system able to reproduce the typical aspect of copper surfaces oxidized by the natural corrosion due to atmospheric agents. **Creative Ardcopper** is made up with:

- Creative Ardcopper-Base s. 0.742: copper effect decorative finish;
- Creative Ardcopper-Creator s. 0.744: antique effect solution.

TECHNICAL DATA SHEET n°164



max. 10% in water volume



max. 10% in water volume



approx. 8-12 m²/l with 2 layers



oxidizable after 12 hrs

READY HUES							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
0.742	5329 copper base	1	6 pcs	59,05	59,05	5,90	

COLOR RANGE



Showcard CREATIVE OXYDATE

APPLICATION METHOD & SURFACE PREPARATION					
Bare interior wall surfaces or already painted with tempera painting	Interior wall surfaces already painted with washable water paints				
ARDFIX s. 0.070 or ISOLEX W s. 0.085	Sand and assure an adequate cleaniness of the surface and absence of oily or greasy traces				
	CREATIVE FONDO s. 0.073				

CREATIVE ARDCOPPER Creator s. 0.744

REA

PACKAGIN

oxidizing solution for Ardcopper



ready to use



SERIES

0.744

10-14 m²/l

COLOR

0000 colourless



ready to use



oxidizable again after 2 hrs

DY HU	IES		
IG [l]	€/l	€/PACKAGING	€/m²
6 nce	29 53	29 53	2 //6



COLOR RANGE



Showcard CREATIVE OXYDATE

APPLICATION METHOD & SURFACE PREPARATION

Protect all the surfaces not interested in application: CREATIVE ARDCOPPER CREATOR s. 0.744 can provoke metal surface oxidation and anti aesthetical spotting on stone surfaces (for example marbles) if gets accidently in touch with them

At finished work, immediately remove masking tapes if present and clean equipment with plenty of water.

Once oxidation is complete, protect the surface with CREATIVE PROTECTOR s. 0.448

CREATIVE ARDCOR-TEN s. 0.740

corten effect water based spatulated decorative finish

Special decorative finish based on water dispersion acryl-siloxanic copolymers, able to reproduce the typical materic ossidised aspect of corten steel. With a remarkable permeability to water vapor and water repellency, it has an excellent resistance to atmospheric agents and to UV rays, guaranteeing an high run-off of superficial dirt by rain water. It is indeed designed as exterior protective and decorative finish, but also obtains high quality finishes for interiors.


TECHNICAL DATA SHEET n°169





ready to use





(<u>0</u>)	striato effects: allow 6 hrs between layers

READY HUES						
SERIES COLOR PACKAGING [1] €/1 €/PACKAGING €/m ²						
0.740	5266	2,5	29,53	73,83	14,76*	

*yield and cost €/m² depends on the application method

COLOR RANGE



Showcard CREATIVE OXYDATE

APPLICATION METHOD & SURFACE PREPARATION						
Bare exterior wall surfaces	Exterior wall surfaces already painted and partially deteriorated	Interior wall surfaces				
Remove any trace of dust, dirt or release agents and apply 1 layer of ISOLEX W s. 0.085, ISOLEX s. 0.081 or 1 layer of ARDFIX s. 0.070 properly diluted	ARDSAN RISANANTE MURALE s. 0.916 (in presence of mould)	LITOSTUCCO s. 1.050 (only for imperfections)				
ARDPLAN AS/BS s. 1.962 (only for imperfections)	ISOLEX W s. 0.085 or ISOLEX s. 0.081	ISOLEX W s. 0.085 or ARDFIX s. 0.070				

CREATIVE PROTECTOR

s. 0.448

water based trasparent protector for decorative products

Satin trasparent colorless varnish suitable to protect decorative finishes and matt water paints. It creates a non-yellowing finish, with an high mechanical resistance and waterproof properties. If applied on surfaces treated with dark nuance water paints, it reduces the anti-aesthetic scoring phenomenon. Being non-flammable and free of unpleasant oudours, it is ideal for indoor and poorly aired rooms. Thanks to strong resistance to atmospheric agents and good elasticity, It is suitable for exterior applications too.

TECHNICAL DATA SHEET n°160





) 20-30% in water volume



READY HUES						
SERIES COLOR PACKAGING [I] €/I €/PACKAGING €/m					€/m²	
0.448	0500 colourless	1	6 pcs	29,53	29,53	5,37*

*yield and cost €/m² depends on the application method

COLOR RANGE



Showcard CREATIVE OXYDATE

APPLICATION METHOD & SURFACE PREPARATION						
Wall surfaces treated with organic origin decorative finishes	Exterior wall surfaces					
Be sure the support was clean, dry, well adherent and uniform	Be sure the surface to treat has at least 2 weeks aging	Be sure the support and primer is perfectly adherent				

CREATIVE VELATURE

s. 0.555

antique effect water based siloxane decorative finish

Special antique effect paint devised for the decoration of exteriors & interior design. It is perfect for interior design as well as the protection & decoration of listed buildings & buildings of architectural interest. It is dust repellent, stays clean and can be recoated with any water based paint. Its performance is enhanced by its mould and algae resistance.

TECHNICAL DATA SHEET n°141







READY HUES							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
0.555	0000 neutral	2,5	2 pcs	26,66	66,65	1,18	
0.555	uuuu neutrat	1	6 pcs	28,66	28,66	1,27	

COLOR RANGE



Showcard CREATIVE VELATURE

TINTING SYSTEMS [16 COLOURS & WIZARD]							
SERIES COLOR PACKAGING [t] €/t €/PACKAGING €/m ²							
0.555	0000 neutral	2,5	2 pcs	26,66	66,65	1,18	
0.555	0000 neutrat	1	6 pcs	28,66	28,66	1,27	

16 COLOURS can realize only "Tinte per esterno" collection of CREATIVE VELATURE showcard



Showcard CREATIVE VELATURE

APPLICATION METHOD & SURFACE PREPARATION

Treat moulds, moss or algae with ARDSAN RISANANTE MURALE s. 0.916

Exterior wall surfaces	Interior mural surfaces
ISOLEX s. 0.081 or ISOLEX W s. 0.085 or SILARD PRIMER s. 0.082	LITOSTUCCO s. 1.050 (solo per eventuali imperfezioni)
Mortar ARDPLAN AS/BS s. 1.962 (only for imperfections)	ARDFIX s. 0.070 or ISOLEX W s. 0.085
ARD FILL s. 0.553	CREATIVE FONDO s. 0.073

CREATIVE ARCHISTAR s. 0.722

crystal effect transparent finish

Waterborne decorative finish for interior design. It contains particular rainbow effect holographic particles which lend multicolour light reflections, on white or coloured surfaces, which evoke bohemia crystal glass. It is odourless and has been devised to guarantee maximum comfort & habitability just a few hours after application. It does not yellow, it is dust repellent, surfaces stay clean longer and can be recoated with any ARD latex paint.

TECHNICAL DATA SHEET n°162







READY HUES						
SERIES	S COLOR PACKAGING [t] €/t €/PACKAGING €/t				€/m²	
0.722	0070 crystals	1	6 pcs	32,56	32,56	3,26

COLOR RANGE



Showcard CREATIVE WHITE & PEARL COLLECTION

APPLICATION METHOD & SURFACE PREPARATION				
Interior mural surfaces	Wooden surfaces & bare chipboard panels			
LITOSTUCCO s. 1.050 (only for imperfections)	LITOSTUCCO s. 1.050			
ARDFIX s. 0.070 or ISOLEX W s. 0.085	(only for imperfections)			
CREATIVE FONDO s. 0.073				

CREATIVE METAL s. 1.749

decorative water based finish metal effect

A prestigious decorative coating that let get "liquid metal" effect finishes. The product has a neutral base, made of acrylic-urethane resins, to which a selection of metallic powders has to be added, according to the kind of wanted effect (steel, gold, brass or copper). Tailor made for interior design, **Creative Metal** let get surfaces in real metal, enhancing the environments with textured decorations original and customizable.

TECHNICAL DATA SHEET n°280









READY HUES						
SERIES	COLOR	PACKAG	GING [kg]	€/kg	€/PACKAGING	€/m²
	3000 brass	1	3 pcs	144,68	144,68	96,45
17/0	4000 gold	1	3 pcs	144,68	144,68	96,45
1.749	5000 copper	1	3 pcs	144,68	144,68	96,45
	9000 steel	1	3 pcs	82,90	82,90	55,27

COLOR RANGE

PREPARAZIONE DEL SUPPORTO E PRODOTTI COMPLEMENTARI				
Interior surfaces already painted	Wood surfaces or bare chipboard panels			
Clean the surfaces, stucco any imperfections, sand and seal	Deeply clean the surface already sanded and even the imperfections (knots, junctions, nails, cracks, ect.) with continuous skimmings of LITOSTUCCO s. 1.050			
Isolate the stucco parts with a layer of ISOLEX W s. 0.085 or ARDFIX s. 0.070 and, allow 6 hours proceed with a layer of CREATIVE FONDO s. 0.073	Sand, clean and apply one or more layers of CREATIVE FONDO s. 0.073			

ARDCOAT C8/S8

s. 1.967


adhesive filler for ETICS carbonatic & siliceous

Ardcoat C8 is a ready-mix based on premier quality Portland cement, carbonate sands and additives. Ardcoat S8 is a ready-mix based on premier quality Portland cement, fluvial silica sands and


They are suitable for the bonding & filling (interiors & exteriors) of thermal insulation panels such as EPS, stiferite, mineral wool (glass & rock) or cork intended for the realization of thermal insulation systems. The remarkable mechanical properties guarantee a solid adhesion to insulating panels, notoriously subject to creeping, as well as the most common mural substrates such as bricks, plastered walls, concrete etc. Furthermore, the particular granulometry and optimum workability made Ardcoat C8 and Ardcoat S8 filling mortars which offers easy application, an excellent uniforming power with a finishing similar to two-coat plaster work. They are also suitable for reinforced fillings on coplanar surfaces with old paintwork or bonded coatings.

Ardcoat C8 & S8 are compliant with the requirements listed in the European technical guide EAD 040083-00-0404 as adhesive and filler for thermal insulation systems.

TECHNICAL DATA SHEET n°407-408







READY HUES SERIES PACKAGING [kg] **€/PACKAGING COLOR** €/kg €/m² **0530** grey 25 0,82 20,50 4,10 1.967 Ardcoat C8 **0510** white 25 0,88 22,00 4,40 1.967 25 **0535** grey 0,82 20,50 4.10 Ardcoat S8

COLOR RANGE



Flyer ARDCOAT SYSTEM

APPLICATION METHOD & SURFACE PREPARATION

Exterior mural surface

ARDPLAN AS/BS s. 1.962 (only to uniform the surface)

ISOREST s. 0.976 (on chalky substrates)

ARDCOAT L10 Glass


s. 1.967


adesivo rasante alleggerito per sistemi di isolamento termico a cappotto

Ready-mix based on premier quality Portland cement, selected sands light mineral inert and additives suitable for the bonding & filling (interiors & exteriors) of thermal insulation panels such as EPS, stiferite, mineral wool (glass & rock) or cork intended for the realization of thermal insulation systems. The remarkable mechanical properties guarantee a solid adhesion to insulating panels (which are notoriously subject to creeping) as well as the most common mural substrates such as bricks, plastered walls, etc. Furthermore, the particular granulometry & optimum workability result in a broad spectrum filling mortar which offers an excellent spreading capacity & thickness. **Ardcoat L10Glass** is perfect for fillings (with or without reinforcements) on coplanar surfaces with old paintwork or bonded coatings.

Ardcoat L10Glass is compliant with the requirements listed in the European technical guide EAD 040083-00-0404 as adhesive and filler for thermal insulation systems.

TECHNICAL DATA SHEET n°409







READY HUES						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.967	0610 white	20	1,16	23,20	5,80	

COLOR RANGE



Flyer ARDCOAT SYSTEM

APPLICATION METHOD & SURFACE PREPARATION

Exterior mural surface

ARDPLAN AS/BS s. 1.962 (only to uniform the surface)

ISOREST s. 0.976 (on chalky substrates)

ARDCOAT L10 EPS

s. 1.967

lightweight adhesive filler with EPS microspheres for thermal insulation systems

Arcoat L10EPS is a ready-mix based on premier quality white cement, calcareous inert, microspheres of EPS and additives, ideal for bonding and filling of thermal insulation panels such as EPS, XPS, Stiferite, mineral wool (glass and rock) or cork, intended for the realization of thermal insulation systems.

Furthermore, the particular granulometry and the optimum workability make **Arcoat L10EPS** a broad spectrum filling mortar with an excellent spreading capacity and thickness.

Arcoat L10EPS is compliant with the requirements listed in the European technical guide EAD 040083-00-0404 as adhesive and filler for thermal insulation systems.

TECHNICAL DATA SHEET n°413









READY HUES						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.967	0620 white	20	1,42	28,40	4,26	

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Exterior mural surface

ARDPLAN AS/BS s. 1.962 (only to uniform the surface)

ARDCOAT C16


s. 1.967

adhesive coarse-grained waterproof and fibrous filler for thermal insulation systems

Ardcoat C16 is a cementious grey colored monocomponent ready-mix suitable for the bonding & filling of interior/ exterior thermal insulating panels such as expanded polystyrene (EPS), Stiferite, mineral wools (glass or rock) or cork intended for the realization of thermal insulation systems. The remarkable mechanical properties guarantee a stable and solid adhesion to insulating panels, which are notoriously subject to creeping, as well as the most common mural substrates such as bricks, plastered walls, concrete etc. Ardcoat C16 is a filling coarse-grained mortar with an excellent easy application and uniforming power, of two-coat plaster work similar finishing. It is also suitable for the realization of reinforced fillings on coplanar surfaces with old paintwork or bonded coatings. ARDCOAT C16 is in grey color, but is available in the with version too, Ardcoat C16 W. Ardcoat C16 is compliant with the requirements listed in the European technical guide EAD 040083-00-0404 as adhesive and filler for thermal insulation systems.



TECHNICAL DATA SHEET n°414





9-11 kg/m² for 5 mm thickness both as a adhesive and as a filler



recoatable after 5-6 days

READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1 047	0515 grey	25	0,78	19,50	3,90
1.967	0511 white	25	0,86	21,50	4,30

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Exterior mural surface

ARDPLAN AS/BS s. 1.962 (only to uniform the surface)

ISOREST s. 0.976 (on chalky substrates)

ARDCOAT C10

s. 1.967


adhesive filler medium-grained for thermal insulation systems

Ardcoat C10 is a cementious monocomponent medium-grained ready-mix suitable for the bonding & filling of interior/exterior thermal insulating panels such as expanded polystyrene (EPS), Stiferite, mineral wools (glass or rock) or cork intended for the realization of thermal insulation systems (ETICS). The remarkable mechanical properties guarantee a stable and solid adhesion to insulating panels, which are notoriously subject to creeping, as well as the most common mural substrates such as bricks, plastered walls, concrete etc.

Ardcoat C10 is compliant with the requirements listed in the European technical guide EAD 040083-00-0404 as adhesive and filler for thermal insulation systems.

TECHNICAL DATA SHEET n°411









READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1 047	0525 grey	25	0,68	17,00	3,40
1.967	0545 white	25	0,69	17,25	3,45

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Exterior mural surface

ARDPLAN AS/BS s. 1.962 (only to uniform the surface)

ARDCOAT M8


s. 1.967


adhesive natural hydraulic lime NHL 3,5 based filler for thermal insulation systems

Ardcoat M8 is a monocomponent ready-mix based on natural hydraulic lime NHL 3.5 and bio-pozzolan suitable for the bonding & filling of interior/exterior thermal insulating panels in mineral wools (glass and rock) or cork intended for the realization of thermal insulation systems, where more breathability is required compared with the normal adhesive.

Ardcoat M8 is in light brown color and complies with the requirements in the Guideline for European Technical Approval EAD 040083-00-0404 as adhesive and filler for thermal insulation systems.

TECHNICAL DATA SHEET n°412







recoata	ble after 5-6 days
---------	--------------------

READY HUES						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.967	0540 light brown	25	1,12	28,00	4,48	

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Exterior mural surface

ARDPLAN AS/BS s. 1.962 (only to uniform the surface)

ISOREST s. 0.976 (on chalky substrates)

ARDPLAN AS/BS

s. 1.962

finishing coat for interiors and exteriors

Grey premixed product based on rapid hydration drying cement binders, inert fillers of selected granulometry & special fluidizing resins. **Ardplan AS/BS** is ideal for fillings from 2 to 20 mm of thickness per layer. **Ardplan AS/BS**, mixed with water, produces an effort free application mortar with a fine plaster trowel effect finish. The product has been devised to obtain a remarkable adhesion on substrates such as concrete, smooth prefabricated structures, non absorbent glossy surfaces & plastic coatings etc. It's the perfect solution for anti-carbonation fillings of decaying concrete such as panels, pillars, beams, risers & cornices.




TECHNICAL DATA SHEET n°401



mix 25 kg of product with 6 liters of water (with a low speed stirrer agitator, avoiding the formation of lumps)





READY HUES						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.962	0050	25	0,94	23,50	0,70	

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Interior & exterior surfaces

BOIACCA PASSIVANTE s. 1.960 (on protruding reinforcement bars)

Fill with two-coat fine or medium plaster work

ARDMALTA s. 1.966

fibre-reinforced thixotropic repair mortar


Premixed fibrereinforced anti contraction product based on quick drying cement binders, inert fillers of selected granulometry & special synthetic resins.


Mixed with clean water it produces a highly thixotropic cohesive mortar which is suitable for producing, without retaining formwork, thick coatings on surfaces with limited extension. The product has been devised to create finishes with optimum adhesion on difficult substrates such as concrete or smooth precasts.

TECHNICAL DATA SHEET n°402











READY HUES					
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²
1.966	0050	25	0,76	19,00	12,92

COLOR RANGE



Showcard LINEA BETON DECOR

APPLICATION METHOD & SURFACE PREPARATION

Concrete surface

Use BOIACCA PASSIVANTE s. 1.960 on protruding reinforcement bars previous removal any trace of rust

BOIACCA PASSIVANTE

s. 1.960

boiacca passivante rust inihibitor for reinforcement bars


Grey mono component rust inhibitor based on cement, synthetic resins & corrosion inhibitors. It is ideal for the protection of reinforcement bars in decaying concrete. It offers remarkable alkalinity & protects iron against aggressive agents such as CO2/SO2 & chlorides whilst offering a perfect anchorage for restoration and retrieval mortars such as Ardmalta and Ardplan AS/BS.

Boiacca Passivante is a specific corrosion inhibitor for concrete reinforcing bars.


TECHNICAL DATA SHEET n°400











READY HUES						
SERIES	COLOR	PACKAGING [kg]	€/kg	€/PACKAGING	€/m²	
1.960	0030	2	13,39	26,78	10,71	

COLOR RANGE



Showcard LINEA BETON DECOR

APPLICATION METHOD & SURFACE PREPARATION

Concrete surfaces with rusty iron

Clean the metal removing any part of unsound concrete

SILVER STUCK

s. 1.963

self adhesive filler stucco powder for the building industry

Stucco powder based on a particular variety of gypsum & synthetic polymers in powder. **Silver Stuck** is suitable as a filler for interior plaster, static cracks & holes before painting. It's the perfect product for stuccowork on plasterboard.

Mixed with water it provides a soft stucco which is extremely easy to apply & sand. It is also used to apply plaster of Paris decorations such as ceiling roses, cornices etc.

TECHNICAL DATA SHEET n°42






mix 2 parts with 1 part of water



) mix 2 parts with 1 part of water





sandable after 6 h and recoatable after 4 h

READY HUES							
SERIES	COLOR	PACKA	PACKAGING [kg]		€/PACKAGING	€/m²	
		20		2,89	57,80	1,44	
1.963	0010	5	4 pcs	3,26	16,30	1,63	
		1	24 pcs	3,91	3,91	1,95	

COLOR RANGE



Showcard LINEA BETON DECOR

APPLICATION METHOD & SURFACE PREPARATION

Interior mural surfaces

ARDFIX s. 0.070 or ISOLEX W s. 0.085 o BIANCOFIX s. 0.079

Fill with a smooth finish

WIZARD s. 0.953

highly concentrated colourant pastes


These are pastes with a high concentration of pigments selected on the basis of the cleanliness of the tone and coverage.


Wizard pastes are designed to minimize the contribution of volatile organic substances (VOC) to the finished products in order to guarantee a broad perspective in relation to the evolution of the regulatory framework on emissions.





shake vigorously by hand before use for perfect homogenization







ensure timed agitation and/or recirculation processes in the dispensers

READY HUES							
SERIES	COLOR		PACKA	GING [l]	€/l	€/PACKAGING	
	1007 white	BCA	1	2 pcs	62,53	62,53	
	3019 oxide yellow	GOS	1	2 pcs	70,87	70,87	
	4010 sun yellow	SOL	1	2 pcs	81,09	81,09	
	4015 orange	ARA	1	2 pcs	113,39	113,39	
	4026 trasparent yellow	GTR	1	2 pcs	69,47	69,47	
	4031 lemon yellow	LIM	1	2 pcs	158,28	158,28	
	5018 oxide red	ROS	1	2 pcs	63,78	63,78	
0.953	5030 purple	VIO	1	2 pcs	132,71	132,71	
0.753	5033 bright red	RIN	1	2 pcs	97,27	97,27	
	5034 external red	RES	1	2 pcs	151,20	151,20	
	5037 trasparent red	RTR	1	2 pcs	69,47	69,47	
	5039 magenta	PIK	1	2 pcs	97,27	97,27	
	7023 green	VER	1	2 pcs	70,88	70,88	
	8008 blue	BNT	1	2 pcs	66,17	66,17	
	8029 oxide blue	BOS	1	2 pcs	127,41	127,41	
	9003 black	NE0	1	2 pcs	54,82	54,82	

COLOR RANGE

SIXTEEN COLOURS

s. 0.957

water-based colourant pastes


These are pastes with a high concentration of pigments selected on the basis of the cleanliness of the tone and coverage.


Sixteen pastes are specifically formulated for the world of water-based products. All our pastes guarantee excellent durability to light and weather, especially in outdoor products.






shake vigorously by hand before use for perfect homogenization







READY HUES							
SERIES	COLOR		PACKA	GING [l]	€/l	€/PACKAGING	
	1005 white	BIA	2	2 pcs	44,68	89,36	
			5	1 pcs	44,68	223,40	
	3005 oxide yellow	GOX	2	2 pcs	44,68	89,36	
	3006 warm yellow	GCA	2	2 pcs	44,68	89,36	
	4009 bright yellow	GVI	2	2 pcs	44,68	89,36	
	9005 oxide black	NOX	2	2 pcs	44,68	89,36	
	5012 oxide red	ROX	1	2 pcs	44,68	44,68	
	5013 dark red	RSC	1	2 pcs	44,68	44,68	
0.957	5014 bright red	RVI	1	2 pcs	44,68	44,68	
	7004 oxide green	vox	1	2 pcs	44,68	44,68	
	8006 oxide blue	вох	1	2 pcs	44,68	44,68	
	4020 yellow	GOG	1	2 pcs	44,68	44,68	
	4035 lemon yellow	BIS	1	2 pcs	44,68	44,68	
	5017 magenta	MAG	1	2 pcs	44,68	44,68	
	5025 red	ROG	1	2 pcs	44,68	44,68	
	7016 green	VFT	1	2 pcs	44,68	44,68	
	8022 bright blue	BFT	1	2 pcs	44,68	44,68	

COLOR RANGE

COLORATUTTO s. 0.951

universal colourant

Universal colouring pastes formulated with particular dispersants & pigments which offer an optimum compatibility and colouring power. Thanks to the high concentration of pigment, strong colours can be realized with small quantities of colorant.

It is ideal for tinting solvent based products (synthetic enamels, quick drying enamels, nitro enamels, rust-resistant products, epoxy enamels & PG7) & water based products (emulsion paints, distemper, plastic products)

TECHNICAL DATA SHEET n°190





COLOR RANGE



Depliant COLORATUTTO

APPLICATION METHOD & SURFACE PREPARATION

Shake thoroughly before opening. Add COLORATUTTO s. 0.951 to the product to be tinted and stir accurately

ARD REP s. 0.910

water-repellent polysiloxanic transparent protective

Finish which is resistant to alkali & atmospheric agents. Its an excellent water repellent treatment for vertical mural surfaces in general (plaster, bricks, wooden or asbestos cement panels & stone). It penetrates deeply into the substrate without altering the water vapour permeability, creating a water repellent barrier. It is ideal for the protection as it inhibits the penetration of acid gasses (carbon & sulphur dioxide etc.), impeding the carbonation process which causes reinforcement corrosion. It inhibits both the progressive crumbling caused by repeated freezing/thawing and the unpleasant white patches deriving from the soluble salts extracted from the walls. It is the perfect product for listed buildings or buildings of architectural interest as it does not alter the original aesthetics (colour & gloss) of facades.



TECHNICAL DATA SHEET n°149





ready to use (air spray gun, diametre: 1,2-1,4 mm pressure: 2-2,5 kg/cm²



beton: 1,3-2 m²/l natural stones: 0,7-5 m²/l bricks: 1,3-2,5 m²/l

READY HUES							
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²		
0.910		20	22,16	443,20	10,40*		
0.710	0000 colourless	5	24,06	120,30	11,29*		

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Mural surfaces

Brush thoroughly to remove any filth, unsound paintwork & eventual efflorescence

^{*} yield and cost €/m² depends on the substrate

ARD REP W s. 0.919

anti-carbonation algae resistant protective filler for concrete


Protective in emulsion based on silane and polysiloxanic compounds. It offers optimum impregnation for the most common absorbent mineral materials found in the building industry. It reacts with substrate humidity forming a water repellent barrier without altering the porosity of the substrate & the water vapour permeability. It inhibits water penetration and the progressive crumbling caused by repeated freezing/thawing as well as the unpleasant white patches deriving from the soluble salts extracted from the walls. Furthermore, this product does not alter the original aesthetics (colour & gloss) of facades. These features make it an excellent water repellent treatment for vertical mural surfaces in general (concrete, plaster, bricks, wooden or asbestos cement panels & stone).



TECHNICAL DATA SHEET n°390







READY HUES						
SERIES	COLOR	PACKAGING [l]	€/l	€/PACKAGING	€/m²	
0.919	0000 colourless	5	15,03	75,15	6,01*	

* vield and cost €/m² depends on the substrate

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Treat mould with ARDSAN RISANANTE MURALE s. 0.916

Mural surfaces

Brush thoroughly to remove any filth, unsound paintwork & eventual efflorescence

SURFACE CLEAR PRESERVING s. 0.430

transparent acrylic protective glossy & matt

This product is based on acrylic polymers which, thanks to the evaporation of the solvent, produce a transparent film with excellent adhesion, elasticity & resistance to chemical-atmospheric agents. It does not yellow under UV rays; its protective film waterproofs the substrate whilst permitting water vapour transpiration. Its reversible as it can be easily removed with the ARD s. 0.976 thinner. It has been devised to protect listed buildings against the damage caused by pollution. It is a versatile product, ideal for the protection & preservation of end items in marble or stones with poor porosity.


TECHNICAL DATA SHEET n°147-148



from min. 20% to max. 100% (max. 80% for matt version) with DILUENTE SINTETICO RAPIDO s. 0.976



with DILUENTE SINTETICO RAPIDO s. 0.976 diametre: 1,2-1,4 mm pressure: 3 kg/cm²



allow 24 hrs between layers

READY HUES						
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²
0.430	0000 glossy	5		42,74	213,70	5,70
0.430	0050 matt	1	6 pcs	43,64	43,64	5,82

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Surfaces must be perfectly clean & dry. The most suitable techniques for eradicating filth & soluble salts must be determined in accordance to the nature of the substrate.

NO-SMOG PLUS s. 0.583

special anti-smoking paint

Opaque paint for interiors with a high thixotrophy & water vapour permeability. It is particularly suitable for painting stained surfaces (smoke, nicotine, soot, heating & old infiltrations). It is odourless and is suitable for painting and decorating interiors such as kitchens, bathrooms, bars etc.. The remarkable elasticity of the film offers an effective application on treated paintwork without flaking. Unlike other traditional alkyd-based smokeresistant products, it dries quickly and is easy to apply.



TECHNICAL DATA SHEET n°176



25-28% in volume of ACQUARAGIA INODORE s. 0.970



20-25% in volume of ACQUARAGIA INODORE s. 0.970



7-8 m²/l with 2 layers



READY HUES							
SERIES	COLOR	PACKAGING [I]		€/l	€/PACKAGING	€/m²	
		10		27,19	271,90	3,62	
0.583	1010 white	4		28,19	112,76	3,76	
		0,750	6 pcs	29,09	21,82	3,88	

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Interior mural surfaces

LITOSTUCCO s. 1.050 (for imperfections)

ISOLEX s. 0.081 (on chalky surfaces)

LITOSTUCCO

s. 1.050

rapid hydro-stucco for wood & plasterwork

A soft spatulable stucco based on polymers in aqueous dispersion which offers good filling power, quick drying, effortless ease of sanding & reduced shrinkage. It is the perfect product for refinishing & filling of interior walls & the preparation of interior wooden substrates.


TECHNICAL DATA SHEET n°40





ready to use (If necessary soften the paste by diluting with a bit of water)





READY HUES							
SERIES	COLOR	PACKAGING [kg]		€/kg	€/PACKAGING	€/m²	
		5		6,20	31,00	6,20	
1.050	1010 white	1	12 pcs	6,95	6,95	6,95	
		0,500	12 pcs	8,60	4,30	8,60	

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION							
Interior mural surfaces	When water-dilutable products are to be used						
ARDFIX s. 0.070 or ISOLEX W s. 0.085 or BIANCOFIX s. 0.079	ARDEOLITE s. 0.022 or BASE s. 0.025	TEMA PITTURA OPACA RIEMPITIVA DI FONDO s. 0.028					

ARD STRIP s. 0.921

odourless universal paint stripper

Revolutionary paint stripper. Free of methyl chloride and dangerous substances. It has been devised in compliance with the Regulation (CE) 276/2010. Thanks to its particular thixotropy it can be applied uniformly even on vertical surfaces without running. It is perfect for removing alkyd enamels, acrylic and nitrocellulose enamels, flatting varnishes, emulsion paints & textured paints.

TECHNICAL DATA SHEET n°180







READY HUES							
SERIES	COLOR	PACKAGING [l]		€/l	€/PACKAGING	€/m²	
0.921	0100 colourless	4		23,93	95,72	N.D.	
0.721	UTUU COLOUT LESS	0,750	6 pcs	25,29	18,97	N.D.	

COLOR RANGE

APPLICATION METHOD & SURFACE PREPARATION

Apply a uniform layer of ARD STRIP s. 0.921 and allow at least 60 minutes before removing the paint with a spatula or scraper

Effort free removal of the paint is possible for 4-5 hrs according to the temperature & humidity

The removal of thick coats may require different treatments

Stripped mineral surfaces must be washed using a high pressure water jet machine. Stripped metal surfaces require a wash diluent

DILUENTE SINTETICO RAPIDO

s. 0.976

Fast drying thinnner for varnishes & long oil alkyd rust inhibitors. Its specific for $\bf Paintgum~7~Fondo~Coprente~s.~0.584$

READY HUES							
SERIES	PACKAGING [l]		€/l	€/PACKAGING			
0.976.0040	5		10,73	53,65			
0.776.0040	1	12 pcs	11,81	11,81			



ACQUARAGIA INODORE

s. 0.970

Thinner (free of recovery solvents) specific for the brush application of varnishing products in general (varnishes & long oil alkyd rust inhibitors, solvent based sealers etc).

READY HUES							
SERIES	PACKA	GING [l]	€/l	€/PACKAGING			
	5		6,40	32,00			
0.970.0030	1	12 pcs	7,48	7,48			
	0,500	12 pcs	9,98	4,99			



DILUENTE NITRO EXTRA

s. 0.972

Universal degreaser & thinner specific for spray application of fast drying (**Ardlux** s. 0.141) or nitro based (**Antiruggine Nitro Grigia** s. 0.040) products.

READY HUES								
SERIES	PACK	AGING [l]	€/l	€/PACKAGING				
0.972.0042	5		7,08	35,40				
0.7/2.0042	1	12 pcs	8,15	8,15				





| EQUIPMENT | & ACCESSORIES

SERIES	COLOR	€/PCS	
9.968.0010	Ardelast fiberglass mesh Roll, H: 100 cm - W: 50 m	90,10	
970.30233 970.30239	Sticker "INDIAN" 51x86 cm 26x44 cm	2,48 1,24	and
970.30234 970.30241	Sticker "MAN" 51x86 cm 26x44 cm	2,48 1,24	and
970.30069	ETICS panel	97,42	
970.30068	ETICS brick	4,50	ARDCOAT STOTE OF THE STOTE OF T
970.40028	Paper shoppers	0,45	
970.40026	Cotton shoppers	2,71	

EQUIPMENT & ACCESSORIES

SERIES	COLOR	€/PCS	
970.40033 970.40034	Spiral note pads Spiral note pads MAXI	1,71 3,31	
970.40030	Note pads	0,69	
970.40032	Note pads A4	1,39	
970.40090	Tin opener	3,51	Annual Control
970.40092	Pail opener	1,14	
970.40015	Pens	0,54	
970.50035	Roll-up	78,80	Total Concession of the Conces
2.969.2119	Sponge	3,00	
2.961.0067	Creative Setard Spatula	4,36	

| CLOTHING, SIGNS | & DROP/DUST SHEETS

SERIES	COLOR	€/PCS	
970.60018	ARD trousers	11,14	
970.60080	ARD baseball cap	2,43	
970.60053	Blue ARD polo Gray ARD polo	7,71 7,71	
970.60050	White ARD cotton t-shirt Blue ARD cotton t-shirt	3,00 3,00	
970.60023	Gray ARD short trousers White ARD short trousers	10,00 10,00	
970.50170	2 face luminous sign 70x70cm	714,30	and =
970.50151	Forex sign 120x90 cm	50,00	and naccanello BRISSER A COLORI
970.50089	Rectangular site banner150x250 cm	85,57	and naccanello BENESSER A COLORI
970.50088	Rectangular site banner (custom) 150x250 cm	107,00	www.ard-raccanello.it and naccanello Biossorie A.Co.oni CUSTOMIZATION AREA

CLOTHING, SIGNS | & DROP/DUST SHEETS |

SERIES	COLOR	€/PCS
970.10020	Showcard Prodotti di preparazione per muro e finiture a spessore	5,36
970.10040	Showcard Ardlux	3,71
970.10082	Showcard Linea Smalti	3,57
970.10070	Showcard Ardeol	2,74
970.10285	Showcard Creative Ard Lime	6,29
970.10286	Showcard Creative Velature	4,79
970.10292	Showcard Creative Morpho	13,09
970.10293	Showcard Creative White & Pearl Collection	5,66
970.10294	Showcard Creative Oxydate	3,69
970.20085	Showcard Linea Legno	6,81
970.20095	Showcard Salvaferro	3,71
970.20115	Showcard Beton Decor	4,21
970.30245	Showcard Ardelast	4,71
970.30042	Showcard Idrosmalto	2,69
970.70057	Showcard Color Experience	1,90
970.70056	Fan-deck 1001 Colours	13,57
970.70053	Fan-deck Tinte d'Italia	14,00
970.70048	Fan-deck NCS 2050	117,14
970.70049	Fan-deck NCS 540	27,43
970.70045	Fan-deck RAL K7	5,71

I PRODUCT CLASSIFICATION

PAGE	PRODUCT	SERIES	PAGE	PRODUCT	SERIES PA	GE	PRODUCT	SERIES
12	1 Rigeneralegno	449	58	4 Tema Finitura Brillante	440 10	4	Ardelast Rasante	561
13	1 Tema Pittura Opaca	028	59	5 Ardtop	510 10	15	Ardelast Stucco	056
14	1 Ardeolite	022	60	5 Idropaint	502 10	6	♣ Creative Fondo	073
15	1 Base	025	61	5 Ardsalus Air Refresh	537 10	7	⚠ Ard Lime	558
16	1 Primer W	008	62	5 Maison	506 10	8		557
17	Over Antiruggine	039	63	5 Unique	524 10	19	Creative Ard Lime Carrara	564
18	1 Ardinox	032	64	5 Domotica	504 11	0	◆ Creative Ard Lime Rasato	565
19	Antiruggine Alchidica	035	65	5 Aedilia	503 11	1	♠ Ard Lime Intonachino	566-567
20	Primer Universale	006	66	5 Interior	525 11	2	♠ Creative Setard	725
21	1 Antiruggine Nitro Grigia	040	67		520 11	3	Creative Shiny Design	715
22	1 Ferr-net	922	68	Traspira	527 11	4	Creative Ard Sand	710
23	2 Ardfix	070	69	Bianco Gentile	521 11	5	Creative Desert Stone	720
24	2 Isolex	081	70	Spazio	541 11	6	♠ Creative Morpho	719
25	2 Isolex W	085	71	4 Ard Interni	544 11	7	Creative Ardtexture	709
26	2 Rebuild Fondo L	614	72	Bianco Coprente	548 11	8	Creative Ardrust	741-743
27	2 Isorest	076	73	◆ Thermoigloo	509 11	9	Creative Ardcopper	742-744
28	Siliard Primer W	077	74	♦ A-B Paint Lavabile	508 12	:0	Creative Ardcor-ten	740
29	Siliard Primer	082	75	• A-B Paint Traspirante	526 12	1	Creative Protector	448
30	2 Biancofix	079	76	Clean	522 12	2	Creative Velature	555
31	2 Primer Riempitivo Coprente	075	77	Ardsan Additivo per Interno	914 12	:3	Creative Archistar	722
32	2 Rasante a Pennello	084	78	Ardsan Additivo per Esterno	915 12	4	♠ Creative Metal	749
33	2 Rasard	083	79	Spray San	911 12	5	45 Ardcoat C8/S8	967
34	2 PG7 Fondo Coprente	584	80	Ardsan Risanante Murale	916 12	:6	4 Ardcoat L10 Glass	967
35	2 PG7 Fill	585	81	Ard Fill	553 12	7	4 Ardcoat L10 EPS	967
36	2 Primer Murale	074	82	Quarz Paint Acrilico	550 12	8	15 Ardcoat C16	967
37	3 Salvaferro	293-296	83	Quarzo Antico AA	607 12	9	15 Ardcoat C10	967
38	3 Neoard	154	84	Quarzo Antico	608 13	0	15 Ardcoat M8	967
39	3 Ardeol	151	85	Quarzo Moderno	551 13	1	♠ Ardplan AS/BS	962
40	Neosilk	252	86	Quarzo XL	604 13	2	15 Ardmalta	966
41	3 Ardsilk	250	87	Rebuild Intonaclima L	624 13	3	15 Boiacca Passivante	960
42	3 Steelguard	290	88	Intonaclima 623-63	13 13 13	4	15 Silver Struck	963
43	3 Ardlux	141	89	Spachtel Rustico	2-637-639 13	5	₩ Wizard	953
44	Idrosmalto Lucido	137	90	Litoflex Acrilico	631 13	6	1 Sixteen	957
45	3 Idrosmalto Satinato	237	91	Beton Decor Coprente	554 13	7	♠ Coloratutto	951
46	3 Idrosmalto Opaco	238	92	Beton Decor Elastomerico	579 13	8		910
47	Overground	939	93	1 Bio Silrest	538 13	9	♠ Ard Rep W	919
48	Over Satinato	232	94	1 Silrest	559 14	.0	Surface Clear Preserving	430
49	3 Over Opaco	234	95	1 Silrest Fill	569 14	1	₱ No-Smog Plus	583
50	3 Tema Luce	135	96	Silrest Intermedio	095 14	2	1 Litostucco	050
51	3 Tema Seta	235	97	① Silrest Intonachino 62	2-627-629 14	.3	♠ Ard Strip	921
52	4 Ard Decor	461	98	② Siliard Paint	516 14	4	Diluente Sintetico Rapido	976
53	♠ Ard Lasur	453	99	② Siliard Fill	552 14	4	Acquaragia Inodore	970
54	◆ Ard Ship	451	100	② Siliard Intonachino	625-641 14	4	🕡 Diluente Nitro Extra	972
55	◆ Tema Impregnante	441	101	Ardelast Grana Fine	568			
56	◆ Tema Wood Pro	443	102	♠ Ardelast Quarzo	563			
57	4 Tema Finitura Cerata	442	103	Ardelast Intonachino	556-645			

CAPTION

Primer for wood and metal

Breathable

1 Colourant

Primer for wall

Anti-mould

Silicate paintSiloxane paint

Various

Enamels

Quartz

Elastomeric paint

Varnishes for wood

Thick coatings

Decorative

Washable

 Φ Anti carbonation finish

Mortar

